

Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy. The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age. The 3WA air circuit breaker is also part of the Siemens Xcelerator portfolio and therefore provides support with achieving digital and sustainable transformation – faster, simpler, and scalable.

Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.



Note:

Products bearing our Siemens EcoTech label are identified by this clickable symbol in the catalog:



www.siemens.com/lowvoltage/SiemensEcoTech

Air Circuit Breakers



All the information you need	1/2
3WA1 quick selection guide	1/4
3WA1 circuit breakers and non-automatic circuit breakers for AC and DC	1/4
3WA1 circuit breakers and non-automatic circuit breakers for AC	1/8
3WA1 non-automatic circuit breakers for DC	1/14
Electronic trip unit	1/18
ETU300 electronic trip unit	1/19
ETU600 electronic trip unit	1/20
Connection	1/26
Communication	1/27
3WA11 – 3WA13	1/28
System overview	1/28
Online configurator highlights	1/30
Structure of the article numbers	1/32
Accessory options	1/46
Summary of power consumption data	1/57
Guide frames for AC	1/58
Guide frames for DC	1/61
Accessories and spare parts	1/62
3WL1 quick selection guide	1/76
3WL1 circuit breakers and non-automatic circuit breakers for AC and DC	1/76
3WL1 circuit breakers and non-automatic circuit breakers for AC	1/78
3WL1 non-automatic circuit breakers for DC	1/82
ETU electronic trip units	1/86
Connection	1/90
Operating mechanism, auxiliary release, auxiliary switch	1/91
3WL11 – 3WL13 (product phase-out)	1/92
Structure of the article numbers	1/92
Accessory options	1/96
Guide frames for AC	1/106
Guide frames for DC	1/107
Accessories and spare parts	1/108
3WL10	1/124
Online configurator highlights	1/124
Structure of the article numbers	1/126
Accessory options	1/128
Guide frames	1/130
ETU electronic trip units and accessories	1/131
Accessories and spare parts	1/136

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about air circuit breakers, please visit our website www.siemens.com/sentron-3wa

Your product in detail

The SiePortal platform (knowledge base) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick Selection Guide
 - 3WA air circuit breakers (**109781967**)
 - 3WL air circuit breakers (**109751638**)
- Brochure
 - 3WA air circuit breakers (**109800077**)

The relevant tender specifications can be found at www.siemens.com/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- 3WA air circuit breaker – Teaserfilm sie.ag/2Myvit
- 3WA air circuit breaker – Highlightfilm sie.ag/3dy65A

Everything you need for your order

Refer to SiePortal to find an overview of your products (product catalog)

- Air circuit breakers sie.ag/2IXiZjB

Direct forwarding to the individual products in SiePortal by clicking on the article number in the catalog or entering this web address incl. article number
[www.siemens.com/product_catalog_SIEP?Article No.](http://www.siemens.com/product_catalog_SIEP?Article%20No.)

Order supports can be found in SiePortal at www.siemens.com/lowvoltage/product-support

- Order Support
 - 3WA air circuit breakers – Made for makers. Simply reliable. (**109800074**)

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your air circuit breaker at www.siemens.com/lowvoltage/3wa-configurator
www.siemens.com/lowvoltage/3wl-configurator
www.siemens.com/lowvoltage/3wl10-configurator

The following are additionally available for your configured air circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at www.siemens.com/lowvoltage/components/contact

You will find further information on services at www.siemens.com/service-offers

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at www.siemens.com/support-request

... can be found in our online services

Commissioning + operation



SENTRON Powerconfig

The combined commissioning and service tool SENTRON Powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download [SENTRON Powerconfig](#)

Free download SENTRON Powerconfig mobile via [App Store](#) and [Play Store](#)



Your product in detail

The SiePortal platform (knowledge base) provides detailed technical information

www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Online Support app available for download from the [App Store](#) and [Play Store](#)

You will find further information at www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- SiePortal (product catalog)
www.siemens.com/lowvoltage/product-catalog
- Image database
www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAX Download Manager at www.siemens.com/cax



Manuals

Manuals can be found in SiePortal at

www.siemens.com/lowvoltage/manuals

- Equipment Manual
 - 3WA1 air circuit breakers ([109763061](#))
 - 3VA27 molded case circuit breakers & 3WL10 air circuit breakers ([109753821](#))
- System Manual
 - 3WA air circuit breaker communication ([109792368](#))
 - 3WL/3VL circuit breakers with communications capability – Modbus ([39850157](#))
 - 3WL/3VL PROFIBUS circuit breakers with communications capability – PROFIBUS ([12560390](#))
- Configuration Manual
 - Low-voltage protection devices selectivity tables ([109748621](#))
- Communication Manual
 - 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP ([109757987](#))
 - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers ([109760220](#))



Face-to-face or online training

Our training courses can be found at

www.siemens.com/sitrain-lowvoltage

- 3WA air circuit breakers (WT-LV3WA)
- 3WL10 air circuit breaker, size 0 (WT-LVA3WL0)
- 3WL air circuit breakers, sizes 1-3 (WT-LVA3WL)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBMAIN)
- Certification: Maintenance and operation of 3WL and 3WA circuit breakers (LV-CBCERT)

Video tutorial on the 3WL air circuit breaker

www.lowvoltage.siemens.com/wcms/3wl-tutorial



Technical overview – Air circuit breakers



The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers

www.siemens.com/lowvoltage/product-support ([109781188](#))

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

1

AC



3WA11



3WA12

Basic data

Rated operational voltage U_e	V	≤ 1000			≤ 1150		
Rated current I_n	A	630 ... 2500			2000 ... 4000		
Size		1			2		
Type of mounting		Withdrawable	Fixed-mounted		Withdrawable	Fixed-mounted	
Number of poles		3/4-pole	3/4-pole		3/4-pole	3/4-pole	

Dimensions

Width (3-pole 4-pole)	mm	320 410	320 410		460 590	460 590	
Height (for breaking capacity N, S, M, H and D C and E)	mm	466 516	437 462		466 516	437 462	
Depth	mm	471	357		471	357	

Approvals

General product approvals	VDE, EAC, CCC, CE, C-Tick					VDE, EAC, CCC, CE, C-Tick				
Marine/shipbuilding	ABS, DNV, LRS, BV, PRS, CCS					ABS, DNV, LRS, BV, PRS, CCS				

Breaking capacity

		N	S	M	H	E	S	M	H	C	E
Rated short-circuit breaking capacity											
$I_{cu} I_{cs}$ at U_e up to 415/440 V AC	kA	55 55	66 66	85 85	100 100	– –	66 66	85 85	100 100	130 130	– –
$I_{cu} I_{cs}$ at U_e up to 500 V AC	kA	55 55	66 66	85 85	100 100	– –	66 66	85 85	100 100	130 130	– –
$I_{cu} I_{cs}$ at U_e up to 690 V AC	kA	42 42	50 50	66 66	66 66	85 85	50 50	66 66	85 85	100 100	85 85
$I_{cu} I_{cs}$ at U_e up to 1000 V AC	kA	– –	– –	– –	– –	50 50	– –	– –	– –	– –	85 85
$I_{cu} I_{cs}$ at U_e up to 1150 V AC	kA	– –	– –	– –	– –	– –	– –	– –	– –	– –	70 70

Rated short-circuit making capacity I_{cm}

I_{cm} at U_e up to 415 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 500 V AC	kA	121	145	187	220	–	145	187	220	286	–
I_{cm} at U_e up to 690 V AC	kA	88	105	145	145	187	105	145	187	220	187
I_{cm} at U_e up to 1000 V AC	kA	–	–	–	–	105	–	–	–	–	187
I_{cm} at U_e up to 1150 V AC	kA	–	–	–	–	–	–	–	–	–	154

AC

**3WA13**

DC

**3WA12**

1

3WA13			3WA12	
≤ 1150			≤ 1000 (≤ 1500 for 4-pole, Breaking capacity E)	
4000 ... 6300			1000 ... 4000	
3			2	
Withdrawable	Fixed-mounted		Withdrawable	Fixed-mounted
3/4-pole	3/4-pole		3/4-pole	3/4-pole
704 914	704 914		460 590	460 590
466 516	437 462		466 516	437 462
471	357		471	357
VDE, EAC, CCC, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LRS, BV, PRS, CCS			ABS, DNV, LRS, BV, PRS, CCS	
H	C	E	D	E
100 100	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –
100 100	150 150 (3-pole); 130 130 (4-pole)	– –	– –	– –
85 85	150 150 (3-pole); 130 130 (4-pole)	150 150 (3-pole); 130 130 (4-pole)	– –	– –
– –	– –	125 125	– –	– –
– –	– –	70 70	– –	– –
220	330 (3-pole); 286 (4-pole)	–	–	–
220	330 (3-pole); 286 (4-pole)	–	–	–
187	330 (3-pole); 286 (4-pole)	330 (3-pole); 286 (4-pole)	–	–
–	–	275	–	–
–	–	154	–	–

3WA1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2 (continued)

1

AC



3WA11

3WA12

Breaking capacity			N	S	M	H	E	S	M	H	C	E
Rated short-time withstand current $I_{cw}^{1)}$												
I_{cw} at U_e up to 500 V AC	0.5 s	kA	55	66	85	85	—	66	85	100	100	—
	1 s	kA	50	66	85	85	—	66	85	85	100	—
	2 s	kA	35 ^{2)/45 ³⁾}	45	70	70	—	66	66 ^{4)/85 ⁵⁾}	66 ^{4)/85 ⁵⁾}	85	—
	3 s	kA	30 ^{2)/35 ³⁾}	35	60	60	—	55 ^{4)/66 ⁵⁾}	55 ^{4)/75 ⁵⁾}	55 ^{4)/75 ⁵⁾}	75	—
I_{cw} at U_e up to 690 V AC	0.5 s	kA	42	50	66	66	85	50	66	85	100	85
	1 s	kA	42	50	66	66	85	50	66	85	100	85
	2 s	kA	35 ^{2)/42 ³⁾}	45	66	66	70	50	66	66 ^{4)/85 ⁵⁾}	85	66 ^{4)/85 ⁵⁾}
	3 s	kA	30 ^{2)/35 ³⁾}	35	60	60	60	50	55 ^{4)/66 ⁵⁾}	55 ^{4)/75 ⁵⁾}	75	55 ^{4)/75 ⁵⁾}
I_{cw} at U_e up to 1000 V AC	0.5 s	kA	—	—	—	—	50	—	—	—	—	85
	1 s	kA	—	—	—	—	50	—	—	—	—	85
	2 s	kA	—	—	—	—	50	—	—	—	—	66 ^{4)/85 ⁵⁾}
	3 s	kA	—	—	—	—	50	—	—	—	—	55 ^{4)/75 ⁵⁾}
I_{cw} at U_e up to 1150 V AC	0.5 s	kA	—	—	—	—	—	—	—	—	—	70
	1 s	kA	—	—	—	—	—	—	—	—	—	70
	2 s	kA	—	—	—	—	—	—	—	—	—	50
	3 s	kA	—	—	—	—	—	—	—	—	—	50
I_{cw} at U_e up to 220 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 300 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 600 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 1000 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
I_{cw} at U_e up to 1500 V DC	1 s	kA	—	—	—	—	—	—	—	—	—	—
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers												
Up to 500 V AC		kA	55	66	85	—	—	66	85	100	100	—
Up to 690 V AC		kA	42	50	66	—	85	50	66	85	100	85
Up to 1000 V AC		kA	—	—	—	—	50	—	—	—	—	85
Up to 1150 V AC		kA	—	—	—	—	—	—	—	—	—	70
Up to 220 V DC		kA	—	—	—	—	—	—	—	—	—	—
Up to 300 V DC		kA	—	—	—	—	—	—	—	—	—	—
Up to 600 V DC		kA	—	—	—	—	—	—	—	—	—	—
Up to 1000 V DC		kA	—	—	—	—	—	—	—	—	—	—
Up to 1500 V DC		kA	—	—	—	—	—	—	—	—	—	—
IT network capability												
1-pole short-circuit breaking capacity I_{IT} acc. to IEC 60947-2 Annex H	≤ 500 V	kA	50	50	50	50	—	50	50	50	50	—
	≤ 690 V	kA	—	—	—	—	50	—	—	—	—	50
	1000 V	kA	—	—	—	—	—	—	—	—	—	—

¹⁾ At rated operational voltage $U_e \geq 690$ V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs} value

²⁾ Size 1 with $I_{n \max} \leq 1250$ A

³⁾ Size 1 with $I_{n \max} \geq 1600$ A

⁴⁾ $I_{n \max} \leq 2500$ A

⁵⁾ $I_{n \max} \geq 3200$ A

AC



DC



1

3WA13**3WA12**

H	C	E	D	E
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
50	50	–	–	–
–	–	50	–	–
–	–	–	–	–

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2

3WA11

Rated current I_n

630 A

800 A

1000 A

1250 A

1600 A

2000 A

2500 A

General data

Isulating function acc. to EN 60947-2

Yes

Utilization category

B

Permissible ambient temperature Operation

°C


-40 ... +70

Storage

°C

-40 ... +80

Mounting position

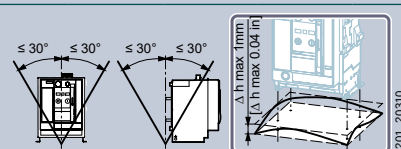

Degree of protection

IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover

Voltage

Rated operational voltage U_e at 50/60 Hz

1000 V version

V AC

≤ 1000

Rated insulation voltage U_i

V AC

1000

Rated impulse withstand voltage U_{imp}

Main conducting paths

kV

12

Auxiliary circuits

kV

4

Control circuits

kV

2.5

Permissible load ¹⁾

Permissible load for withdrawable versions

For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	1930	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1210	1490	1780	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2370
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1545	1855	2060

Permissible load for fixed-mounted versions

For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 ²⁾
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 ²⁾
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500 ²⁾

Power loss at I_n

With 3-phase symmetrical load with maximum rated current, complete device (3/4p), with rear horizontal connections	Fixed-mounted	W	30	45	70	105	135	240	360
	Withdrawable versions	W	55	85	130	205	310	440	600

¹⁾ The stated temperatures are the ambient temperatures of the circuit breaker

²⁾ Copper bars painted black

³⁾ Only flange connections are available

⁴⁾ 4000 A up to 65 °C

⁵⁾ For 4000 A circuit breakers with horizontal connection, 5 × 100 × 10 mm bars are required




3WA12



3WA13



1

2000 A			2500 A	3200 A	3600 A	3-pole	4000 A ⁵⁾	4-pole N pole left with option D04	4000 A	5000 A	6300 A
Yes			Yes						Yes		
B			B						B		
-40 ... +70			-40 ... +70						-40 ... +70		
-40 ... +80			-40 ... +80						-40 ... +80		
											
IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover						IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
≤ 1150			≤ 1150						≤ 1150		
≤ 1150			≤ 1150						≤ 1150		
12			12						12		
4			4						4		
2.5			2.5						2.5		
2000	2500	3200	3600 ³⁾	4000	4000	4000	4000	4000	4000	5000	—
2000	2500	3020	3490 ³⁾	3750	3750	3750	3750	3750	4000	5000	—
2000	2500	3020	3380 ³⁾	3620	3620	3620	3620	3620	4000	5000	—
2000	2280	2870	3150 ³⁾	3360	3360	3360	3360	3360	4000	5000	—
2000	2500	3200	—	4000	4000	4000	4000	4000	4000	5000	5920
2000	2500	3200	—	3910	3910	3910	3910	3910	4000	5000	5810
2000	2390	2945	—	3645	3645	3645	3645	3645	4000	5000	5500
2000	2500	3200	—	4000	4000	4000	4000	4000	4000	5000	—
2000	2500	3200	—	4000	4000 ⁴⁾	4000	4000	4000	4000	5000	—
2000	2500	3200	—	4000	3860	4000	4000	4000	4000	5000	—
2000	2500	3200	—	4000	4000	4000	4000	4000	4000	5000	6300
2000	2500	3200	—	4000	4000	4000	4000	4000	4000	5000	6300
2000	2500	3200	—	4000	4000	4000	4000	4000	4000	5000	5920
180	270	410	—	805	830	805	805	805	520	630	900
320	520	710	800	1170	1200	1170	1170	1170	810	1050	1600

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Switching times									
Make time (mechanical)		ms				35			
Electrical make time (through closing coil 100% OP)		ms				80			
Electrical make time (through closing coil 5% OP)		ms				50			
Opening time (mechanical)		ms				38			
Electrical opening time (through shunt trip 100% OP)		ms				80			
Electrical opening time (through shunt trip 5% OP)		ms				50			
Electrical opening time (through undervoltage release)		ms				80 ²⁾			
Opening time due to ETU (instantaneous short-circuit release)		ms				50			
Service life/endurance									
Breaking capacity N, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance ¹⁾	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			30000				
Breaking capacity S, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance ¹⁾	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			30000				
Breaking capacity M, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles			20000				
Breaking capacity E, 3/4-pole³⁾									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	Without maintenance 1000 V	Operating cycles				1000			
	Without maintenance 1150 V	Operating cycles				–			
	With maintenance ¹⁾	Operating cycles				20000			
Breaking capacity H, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance ¹⁾	Operating cycles				20000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance ¹⁾	Operating cycles				20000			
Breaking capacity C, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance ¹⁾	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance 690 V ¹⁾	Operating cycles				–			
Switching frequency (electrical operating cycles)									
Breaking capacity N and S									
	3-pole	1/h				45			
	4-pole	1/h				45			
Breaking capacity M and H									
	3-pole	1/h				45			
	4-pole	1/h				60			
Breaking capacity C									
	3-pole	1/h				–			
	4-pole	1/h				–			
Breaking capacity E³⁾									
≤ 690 V	3-pole	1/h				45			
	4-pole	1/h				60			
1000 V/1150 V	3-pole	1/h				20			
	4-pole	1/h				20			

¹⁾ Maintenance means: Replacing main contacts and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).

²⁾ Opening time with short-time delay of the undervoltage release can be set up to 200 ms

³⁾ On E class circuit breakers, the main contacts can only be replaced in the factory

3WA12



3WA13



1

2000 A		2500 A	3200 A	3600 A	4000 A	4000 A	5000 A	6300 A
			35				35	
			80				100	
			50				50	
			34				34	
			80				73	
			50				50	
			80 ²⁾				80 ²⁾	
			50				50	
			–				–	
			–				–	
			–				–	
			–				–	
			10000				–	
			20000				–	
7500	7500		4000	2000	2000		–	
			20000				–	
			10000				–	
			20000				–	
7500	7500		4000	2000	2000		–	
			20000				–	
			10000				5000	
			20000				10000	
7500	7500		4000	2000	2000		1000	
			1000				1000	
			500				500	
			20000				10000	
			10000				7500	
			20000				15000	
7500	7500		4000	2000	2000		2000	
20000	20000		20000	20000	20000		15000	
5000	5000		5000	–	–		5000	
10000	10000		10000	–	–		10000	
5000	5000		4000	–	–		1000	
10000	10000		10000	–	–		10000	
			45 ⁴⁾				–	
			60 ⁴⁾				–	
			45				60 ⁵⁾	
			60				60 ⁵⁾	
			60				60	
			60				60	
			45				60	
			60				60	
			20				20	
			20				20	

⁴⁾ Breaking capacity N not available in size 2⁵⁾ Breaking capacity M not available in size 3

3WA1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Connection									
Minimum main conductor cross-sections (horizontal, front and flange connection)									
Copper bars, Cu, bare	Unit x mm x mm		1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 50 x 10
Copper bars, Cu, painted black	Unit x mm x mm		1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 50 x 10
Minimum main conductor cross-sections (vertical connection)									
Copper bars, Cu, bare	Unit x mm x mm		1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 100 x 5 2 x 100 x 10
Copper bars, Cu, painted black	Unit x mm x mm		1 x 40 x 10	1 x 50 x 10	1 x 60 x 10	2 x 40 x 10	2 x 50 x 10	3 x 50 x 10	4 x 100 x 5 2 x 100 x 10
Auxiliary conductor (Cu) max. number of auxiliary conductors x cross-section (solid/stranded)									
Standard connection = push-in	Without end sleeve					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 1					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 4					2 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)			
	With twin end sleeve					2 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 11 mm (0.39 ... 0.43 inch)			
Optional connection with screw connection	Without end sleeve			2 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)					
	With end sleeve acc. to DIN 46228 Part 1			2 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 x 0.5 ... 2.5 mm ² (AWG 20 ... 14)					
	With end sleeve acc. to DIN 46228 Part 4			1 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)					
	With twin end sleeve			1 x 0.5 ... 1.5 mm ² (AWG 20 ... 16)					
	Stripped length			7 ... 8 mm (0.28 ... 0.31 inch)					
Position signaling switch modul									
Spring-loaded terminals for standard signaling contacts	Without end sleeve					0.2 ... 2.5 mm ² (AWG 28 ... 12)			
	With end sleeve acc. to DIN 46228 Part 4					0.25 ... 1.5 mm ² (AWG 20 ... 16)			
	Stripped length					5 ... 6 mm (0.2 ... 0.24 inch)			
Push-in connection for standard signaling contacts	Solid					0.5 ... 2.5 mm ² (AWG 20 ... 12)			
	With end sleeve					0.5 ... 1.5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 12 mm (0.39 ... 0.47 inch)			
Push-in connection for COM signaling contacts	Solid					0.5 ... 2.5 mm ² (AWG 20 ... 12)			
	With end sleeve					0.5 ... 1.5 mm ² (AWG 20 ... 16)			
	Stripped length					10 ... 12 mm (0.39 ... 0.47 inch)			
Weights ¹⁾									
3-pole	Fixed-mounted circuit breaker	kg	38.5	38.5	38.5	42.5	42.5	43.5	43.5
	Withdrawable circuit breaker without guide frame	kg	39	39	39	40	40	41	41
	Guide frames	kg	26	26	26	27	27	29	29
4-pole	Fixed-mounted circuit breaker	kg	47	47	47	52	52	53	53
	Withdrawable circuit breaker without guide frame	kg	45	45	45	46	46	47	47
	Guide frames	kg	30	30	30	32	32	34	34

¹⁾ Weights refer to:

- Breakers with the lowest breaking capacity in each case (size 1: breaking capacity N, size 2: breaking capacity S, size 3: breaking capacity H)
- Breakers with ETU600 (LSI)
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories
- Size 2, 3600 A with flange connections

²⁾ Only available as a flange connection

3WA12



3WA13



1

2000 A	2500 A	3200 A	3600 A ²⁾	4000 A	4000 A	5000 A	6300 A
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	5 × 100 × 10	5 × 100 × 10	4 × 100 × 10	6 × 100 × 10	–
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
3 × 100 × 5 (3 × 50 × 10) 2 × 80 × 10	2 × 100 × 10	3 × 100 × 10	–	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)					2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
10 ... 11 mm (0.39 ... 0.43 inch)					10 ... 11 mm (0.39 ... 0.43 inch)		
2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)					1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)					1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
7 ... 8 mm (0.28 ... 0.31 inch)					7 ... 8 mm (0.28 ... 0.31 inch)		
0.2 ... 2.5 mm ² (AWG 28 ... 12)					0.2 ... 2.5 mm ² (AWG 28 ... 12)		
0.25 ... 1.5 mm ² (AWG 20 ... 16)					0.25 ... 1.5 mm ² (AWG 20 ... 16)		
5 ... 6 mm (0.2 ... 0.24 inch)					5 ... 6 mm (0.2 ... 0.24 inch)		
0.5 ... 2.5 mm ² (AWG 20 ... 12)					0.5 ... 2.5 mm ² (AWG 20 ... 12)		
0.5 ... 1.5 mm ² (AWG 20 ... 16)					0.5 ... 1.5 mm ² (AWG 20 ... 16)		
10 ... 12 mm (0.39 ... 0.47 inch)					10 ... 12 mm (0.39 ... 0.47 inch)		
0.5 ... 2.5 mm ² (AWG 20 ... 12)					0.5 ... 2.5 mm ² (AWG 20 ... 12)		
0.5 ... 1.5 mm ² (AWG 20 ... 16)					0.5 ... 1.5 mm ² (AWG 20 ... 16)		
10 ... 12 mm (0.39 ... 0.47 inch)					10 ... 12 mm (0.39 ... 0.47 inch)		
55	57	69	–	77	113	115	115
52	54	59	59	59	91	92	92
33.5	35.5	36.5	27.5	40	85.5	87	87
68.5	71.5	86.5	–	97.5	147.5	149.5	149.5
63.5	66	73	73	73	115.5	116.5	116.5
40	42.5	51.5	36	53	103.5	105.5	105.5

3WA1 non-automatic circuit breakers for DC

IEC 60947-2

3WA12



Rated current I_n

General data

			1000 A	2000 A	4000 A
Isolating function acc. to EN 60947-2			Yes		
Utilization category			B		
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C)	°C	-40 ... +70		
	Storage	°C	-40 ... +80		
Mounting position					
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		

Voltage

Rated operational voltage U_e	Breaking capacity D E	V DC	600 1000 (3-pole); 1500 (4-pole)		
Rated insulation voltage U_i	Breaking capacity D E	V DC	600 1000 (3-pole); 1500 (4-pole)		
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12		
	Auxiliary circuits	kV	4		
	Control circuits	kV	2.5		

Permissible load

Permissible load for withdrawable versions

For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	3640
	Up to 60 °C (Cu bare)	A	1000	2000	3500
	Up to 70 °C (Cu bare)	A	1000	1950	3250
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	3640
	Up to 70 °C (Cu bare)	A	1000	2000	3400

Permissible load for fixed-mounted versions

For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	3900
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	4000

Power loss at I_n

With 3-phase symmetrical load, complete device (3/4p)	Withdrawable versions 3/4-pole	W	170 220	320 420	750 1000
	Fixed-mounted 3/4-pole	W	130 190	240 360	500 660

Switching times

Make time (mechanical)	ms	35	35	35
Electrical make time (through closing coil 100% OP)	ms	80	80	80
Electrical make time (through closing coil 5% OP)	ms	50	50	50
Opening time (mechanical)	ms	34	34	34
Electrical opening time (through shunt trip 100% OP)	ms	80	80	80
Electrical opening time (through shunt trip 5% OP)	ms	50	50	50
Service opening time (through undervoltage release)	ms	80 ¹⁾	80 ¹⁾	80 ¹⁾

Service life/endurance

Breaking capacity D, 3/4-pole

Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Electrical	Without maintenance 600 V	Operating cycles	6000	6000	4000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000

¹⁾ Opening time with short-time delay of the undervoltage release can be set up to 200 ms

3WA12



1

Rated current I_n			1000 A	2000 A	4000 A
Service life/endurance					
Breaking capacity E, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Electrical	Without maintenance 1000 V	Operating cycles	1000	1000	1000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Breaking capacity E, 4-pole					
Electrical	Without maintenance 1500 V ²⁾	Operating cycles	1000	1000	1000
	With maintenance ¹⁾	Operating cycles	20000	20000	20000
Switching frequency (electrical operating cycles)					
Breaking capacity D					
	3- and 4-pole	1/h	45/60	45/60	45/60
Breaking capacity E					
	3- and 4-pole ³⁾	1/h	20/20	20/20	20/20
Connection					
Minimum cross-sections of main conductor bars (infeed and load connections)					
Copper bars, bare or painted black		Unit × mm × mm	1 × 60 × 10	3 × 100 × 5; 2 × 80 × 10	4 × 100 × 10
Minimum cross-sections of main conductor bars (pole straps) ⁴⁾					
Copper bars, bare or painted black		Unit × mm × mm	1 × 100 × 10; (2 × 100 × 5)	2 × 100 × 5; (2 × 100 × 10)	3 × 100 × 10; vertical
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)					
Standard connection = push-in	Without end sleeve		2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 4		2 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With twin end sleeve		2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 11 mm (0.39 ... 0.43 inch)		
Optional connection with screw connection	Without end sleeve		2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/ 1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 1		2 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)/ 1 × 0.5 ... 2.5 mm ² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 4		1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	With twin end sleeve		1 × 0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)		
Position signaling switch module					
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.2 ... 2.5 mm ² (AWG 28 ... 12)		
	With end sleeve acc. to DIN 46228 Part 4		0.25 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)		
Push-in connection for standard signaling contacts	Solid		0.5 ... 2.5 mm ² (AWG 20 ... 12)		
	With end sleeve		0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Push-in connection for COM signaling contacts	Solid		0.5 ... 2.5 mm ² (AWG 20 ... 12)		
	With end sleeve		0.5 ... 1.5 mm ² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Weights ³⁾					
3-pole	Fixed-mounted circuit breaker	kg	55	55	68
	Withdrawable circuit breaker without guide frame	kg	52	52	59
	Guide frames	kg	34	34	50
4-pole	Fixed-mounted circuit breaker	kg	68.5	68.5	86.5
	Withdrawable circuit breaker without guide frame	kg	63.5	63.5	74
	Guide frames	kg	40.5	40.5	61.5

¹⁾ Maintenance means: Replacing main contacts and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).

²⁾ 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

³⁾ Weights refer to:












- Breakers with breaking capacity E
- Fixed-mounted circuit breakers/guide frames with vertical connections
- Guide frame with position signaling switch
- Without any other accessories

⁴⁾ For more information on the DC pole straps, see the Equipment Manual for 3WA1

3WA1 non-automatic circuit breakers for DC

Application examples

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

Minimum required contact gaps at rated voltage	DC 1-pole disconnection Grounded system	DC 2-pole (all-pole) disconnection Grounded system	DC 2-pole (all-pole) disconnection Non-grounded system
Rated operational voltage up to 300 V			
 I201_20262	 I201_20251	 I201_20252	 I201_20253
Rated operational voltage up to 600 V			
 I201_20263	 I201_20254	 I201_20255	 I201_20253
Rated operational voltage up to 1000 V			
 I201_20264	 I201_20256	 I201_20260	 I201_20258
Rated operational voltage up to 1500 V			
 I201_20265	 I201_20259		 I201_20258

Note:

DC 2-pole (all-pole) disconnection; grounded system

The grounded conductor must always be assigned to the individual switching pole of the non-automatic air circuit breaker, so that in the event of a ground fault there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers, and 3 conducting paths in series in a circuit with 4-pole circuit breakers. The jumpers between the switching poles must be short-circuit and ground-fault proof.

Electronic trip unit

Differentiation

1



	ETU300 electronic trip unit	ETU600 electronic trip unit
Function		
Protective function LSI	■	■
Protective function LSIG	■	■
Protective function LSIG Hi-Z	—	■
Neutral conductor protection (N)	■	■
Metering function	—	■
Enhanced Protective functions	—	■
CubicleBUS ²	—	■
Display	—	■
DAS+ input/output	■	■
LED display of reason for tripping	■	■
Bluetooth and USB	—	■
FW Updates	—	■
Internal self-test with and without tripping	■	■
Extended test option (tripping characteristic)	—	■
Activation of the ETU via powerbank	—	■
Activation of the ETU for self-test via TD400	■	—

Note:
By replacing the electronic trip unit, it is possible to upgrade from ETU300 to ETU600.

ETU300 electronic trip unit

Protective functions

ETU300 LSI, ETU300 LSIG

Protective function	Setting range and invariable parameters	Values
L: Overload protection LT		
Tripping	Switched on	
Current setting I_r	0.4 ... $1.0 \times I_n$	0.4/0.5/0.6/0.7/0.75/0.8/0.85/0.9/0.95/1.0 $\times I_n$
Tripping time t_r at $6 \times I_r$	0.75 ... 25 s	0.75/1/2/5/8/10/14/17/21/25 s
Characteristic LT curve	I^2t	
Thermal memory	Switched on	
Cooling time constant	$18 \times t_r$	
Phase failure detection	Switched on	
L: Overload protection LT, neutral conductor		
Tripping	Switched on	
Current setting I_N	$1.0 \times I_n$	
S: Short-time-delayed short-circuit protection ST		
Tripping	Can be switched on/off	
Current setting I_{sd}	1.5 ... $10 \times I_n$ max. $0.8 \times I_{cw}^{1)}$	OFF/1.5/2/2.5/3/4/5/6/8/10 $\times I_r$ max. $0.8 \times I_{cw}^{1)}$
Tripping time t_{sd}	0.08 ... 0.4 s	0.08/0.15/0.22/0.3/0.4 s
Characteristic ST curve	I^2t and I^0t	
Reference point $I_{ST ref}$	$8 \times I_r$	
I: Instantaneous short-circuit protection INST		
Tripping	Switched on	
Current setting I_i	1.5 ... $15 \times I_n$ max. $0.8 \times I_{cs}^{1)}$	1.5/2/3/4/5/6/8/10/12/15 $\times I_n$ max. $0.8 \times I_{cs}^{1)}$
Maintenance mode DAS+		
Current setting I_{DAS+}	$1.5 \times I_n$	Activation via ETU input

ETU300 LSIG

Protective function	Setting range	
G: Ground-fault protection GF		
Tripping	Switched on	
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor
Characteristic GF curve		I^0t
Current setting I_g		$0.2 \times I_n$ (min. 100 A, max. 1200 A)
Tripping time t_g	0.2 s	

¹⁾ The setting value is limited as a function of the breaking capacity at rated operational voltage U_e .

ETU600 electronic trip unit

Protective functions

1

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z							
Protective function	Variable setting range	Setting values with rotary switch					
L: Overload protection LT							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_r	0.4 ... $1.0 \times I_n$	0.5/0.6/0.7/0.75/0.8/0.85/0.9/ 0.95/1.0 $\times I_n$	■	■	■	■	■
Tripping time t_r at $6 \times I_r$	At I^2t : 0.5 ... 30 s and at I^4t : 0.5 ... 5 s	1/2/5/8/10/14/17/21/25 s	■	■	■	■	■
Characteristic LT curve	I^2t and I^4t		■	■	■	■	■
Thermal memory	Can be switched on/off		■	■	■	■	■
Cooling time constant	10 and $18 \times t_r$		■	■	■	■	■
Phase failure detection	Can be switched on/off		■	■	■	■	■
Overload pre-alarm PAL	Can be switched on/off		■	■	■	■	■
Current setting $I_{r\text{ PAL}}$	0.7 ... $1.0 \times I_r$		■	■	■	■	■
Delay time $t_{r\text{ PAL}}$	0.5 ... $1.0 \times t_r$		■	■	■	■	■
L: Overload protection LT, neutral conductor							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{rN}	3-pole: 0.2 ... $2.0 \times I_n$ 4-pole: 0.2 $\times I_n$... $I_{n\text{ max}}$		■	■	■	■	■
Current setting $I_{rN\text{ PAL}}$	0.7 ... $1.0 \times I_N$		■	■	■	■	■
S: Short-time-delayed short-circuit protection ST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{sd}	$0.6 \times I_n$... $0.8 \times I_{cw}$ max. $0.8 \times I_{cw}^{1)}$	1.5/2/2.5/3/4/5/6/8/10 $\times I_r$ max. $0.8 \times I_{cw}^{1)}$	■	■	■	■	■
Tripping time t_{sd}	0.02 ... 0.4 s	At Fix: 0.08/0.15/0.22/0.3/0.4 s At I^2t : 0.1/0.2/0.3/0.4 s	■	■	■	■	■
Characteristic ST curve	I^0t and I^2t		■	■	■	■	■
Reference point $I_{ST\text{ ref}}$	$6\text{--}12 \times I_r$		■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
S: Directional short-time-delayed short-circuit protection dST							
Tripping	Can be switched on/off		□	□	□	■	■
Direction setting	Forward: ↓ or ↑		□	□	□	■	■
Current setting $I_{sd\text{ FW}}$	$0.6 \times I_n$... $0.8 \times I_{cw}$		□	□	□	■	■
Current setting $I_{sd\text{ REV}}$	$0.6 \times I_n$... $0.8 \times I_{cw}$		□	□	□	■	■
Tripping time $t_{sd\text{ FW}}$	0.05 ... 0.4 s		□	□	□	■	■
Tripping time $t_{sd\text{ REV}}$	0.05 ... 0.4 s		□	□	□	■	■
Characteristic dST-curve FW	I^0t and I^2t		□	□	□	■	■
Characteristic dST-curve REV	I^0t and I^2t		□	□	□	■	■
Reference point $I_{dST\text{ ref FW}}$	$6\text{--}12 \times I_r$		□	□	□	■	■
Reference point $I_{dST\text{ ref REV}}$	$6\text{--}12 \times I_r$		□	□	□	■	■
Intermittent detection FW	Can be switched on/off		□	□	□	■	■
Intermittent detection REV	Can be switched on/off		□	□	□	■	■
I: Instantaneous short-circuit protection INST							
Tripping	Can be switched on/off ²⁾		■	■	■	■	■
Current setting I_i	$1.5 \times I_n$... $0.8 \times I_{cs}$ max. $0.8 \times I_{cs}^{1)}$	1.5/2/3/4/6/8/10/12/15 $\times I_n$ max. $0.8 \times I_{cs}^{1)}$	■	■	■	■	■

¹⁾ The setting value is limited as a function of the breaking capacity at the set rated voltage.

²⁾ Cannot be switched off if rated short-time withstand current I_{cw} is less than rated short-circuit breaking capacity I_{cs}

- Available, feature of the application package
- Can be retrofitted

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z							
Protective function	Variable setting range	Setting values with rotary switch					
I: Making-current release MCR							
Tripping	Can be switched on/off		☐	☐	☐	☒	☒
Current setting I_{MCR}	1.5 ... 15 × I_n		☐	☐	☐	☒	☒
Monitoring time t_{MCR}	0.04 ... 0.5 × s		☐	☐	☐	☒	☒
Reverse power protection RP							
Tripping	Can be switched on/off		☐	☐	☐	☒	☒
Setting value P_{RP}	0.05 ... 0.5 × P_n		☐	☐	☐	☒	☒
Tripping time t_{RP}	0.01 ... 25 s		☐	☐	☐	☒	☒
Enhanced Protective functions EPF							
Phase unbalance current and phase unbalance voltage			☐	☐	☐	☒	☒
Undervoltage and overvoltage			☐	☐	☐	☒	☒
Active power import and active power export			☐	☐	☐	☒	☒
Underfrequency and overfrequency			☐	☐	☐	☒	☒
Total harmonic distortion for current and voltage			☐	☐	☐	☒	☒
Phase sequence detection			☐	☐	☐	☒	☒
Network and system protection			–	–	☐	☐	☐
Decoupling protection			–	–	☐	☐	☐
Maintenance mode DAS+							
Current setting $I_{i\ DAS+}$	1.5 ... 10 × I_n		☒	☒	☒	☒	☒
Current setting $I_{g\ DAS+}$	With LSIG GFx option plug Residual: – Sizes 1 and 2: 100 ... 2000 A and – Size 3: 400 ... 2000 A Direct: 15 ... 2000 A		☒	☒	☒	☒	☒
Tripping time $t_{g\ DAS+}$	0 ... 5 s		☒	☒	☒	☒	☒
Options							
Parameter set changeover	Switchable between parameter set A and B		☐	☐	☐	☒	☒
Limit values	Undershooting, overshooting		☒	☒	☒	☒	☒
Zone-selective interlocking ZSI	Requires ZSI200 module		☐	☐	☐	☐	☐
Waveform memory			☐	☐	☐	☐	☒
Condition monitoring	Health indicator and remaining life time		–	☐	☒	☒	☒

– Not available

■ Available, feature of the application package

□ Can be retrofitted

ETU600 electronic trip unit

Protective functions

1

ETU600 LSI

Protective function			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
G: Ground fault GF alarm							
Alarm	Can be switched on/off		☐	☐	☐	☒	☒
Current setting $I_{g \text{ alarm}}$	Detection method	Sizes 1 and 2: 100 ... 5000 A	☐	☐	☐	☒	☒
	Residual	Size 3: 400 ... 5000 A					
Alarm time $t_{g \text{ alarm}}$	0 ... 0.5 s		☐	☐	☐	☒	☒

- ☒ Available, feature of the application package
☐ Can be retrofitted

ETU600 LSIG with LSIG GFx option plug (GF extended)

Protective function			Variable setting range				
G: Ground fault GF							
Tripping	Can be switched on/off		☒	☒	☒	☒	☒
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	☒	☒	☒	☒	☒
	Direct	Direct metering of the ground-fault current with a current transformer	☒	☒	☒	☒	☒
	Dual	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Metering of the ground-fault current with an external current transformer	☒	☒	☒	☒	☒
Characteristic GF curve		For Fix (I^0t)/ I^2t / I^4t / I^6t	☒	☒	☒	☒	☒
Current setting I_g	Detection method Residual	Sizes 1 and 2: 100 ... 2000 A Size 3: 300 ... 2000 A	☒	☒	☒	☒	☒
	Detection method Direct	15 ... 2000 A	☒	☒	☒	☒	☒
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	☒	☒	☒	☒	☒
	For I^2t at $3 \times I_g$	0 ... 30 s	☒	☒	☒	☒	☒
	$t_{g\text{ def}}$ at I^2t	0.05 ... 0.5 s	☒	☒	☒	☒	☒
Intermittent detection		Can be switched on/off	☒	☒	☒	☒	☒
G: Ground fault GF alarm							
Alarm	Can be switched on/off		☒	☒	☒	☒	☒
Current setting $I_{g\text{ alarm}}$	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	☒	☒	☒	☒	☒
	Detection method Direct	15 ... 5000 A	☒	☒	☒	☒	☒
Alarm time $t_{g\text{ alarm}}$		0 ... 0.5 s	☒	☒	☒	☒	☒

- ☒ Available, feature of the application package

			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600 LSIG Hi-Z with LSIG GFx option plug (GF extended)							
Protective function		Variable setting range					
G: Ground fault GF Hi-Z							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N conductor	■	■	■	■	■
	Dual Hi-Z, for high-impedance connection of the exter- nal current transformers	Protection zone UREF: Detection of the ground-fault current by means of summation current formation Protection zone REF: Metering of the ground-fault current with an external current transformer combination	■	■	■	■	■
Characteristic GF curve		For Fix (I^0t)/ I^2t / I^4t / I^6t	■	■	■	■	■
Current setting I_g	Protection zone UREF	Size 2: 100 ... 2000 A and Size 3: 300 ... 2000 A	■	■	■	■	■
	Protection zone REF	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^2t $3 \times I_g$ in protection zone UREF	0 ... 30 s	■	■	■	■	■
	$t_{g\text{ def}}$ at I^2t	0.05 ... 0.5 s	■	■	■	■	■
Intermittent detection	Can be switched on/off		■	■	■	■	■
G: Ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\text{ alarm}}$	Protection zone UREF	Size 2: 100 ... 5000 A and Size 3: 400 ... 5000 A	■	■	■	■	■
Alarm time $t_{g\text{ alarm}}$	0 ... 0.5 s		■	■	■	■	■

■ Available, feature of the application package

ETU600 electronic trip unit

Operation, interfaces and metering function

		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring	Non- automatic air circuit breakers
ETU600							
Operation and interfaces							
Rotary switch		■	■	■	■	■	—
Display and operating keys		■	■	■	■	■	—
SETRON Powerconfig configuration software		■	■	■	■	■	—
Fieldbus communication		■	■	■	■	■	—
Color display		■	■	■	■	■	—
Bluetooth ¹⁾ and USB interface		■	■	■	■	■	—
Communication							
Prepared for connection of a communications module (ready4COM feature)	Status messages of the circuit breaker	□	■	■	■	■	□
	Status messages of the ETU600 electronic trip unit	□	■	■	■	■	—
	Remote operation, requires a communications module, closing coil, shunt trip	□	■	■	■	■	□
Communications module		□	□	□	□	□	□
Digital input and output on the ETU600 electronic trip unit							
Parameterizable input	For activating Maintenance mode DAS+ or can be used for parameter set changeover	■	■	■	■	■	—
Parameterizable output	Usable as "life contact", early trip contact, and for displaying "Parameter set B active" or "Maintenance mode DAS+ active"	■	■	■	■	■	—

¹⁾ A country-specific radio license is required to operate the Bluetooth interface.
Before activating the Bluetooth function, ensure that the license is available:
www.siemens.com/lowvoltage/certificates

- Not available
- Available, feature of the application package
- Can be retrofitted

		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
ETU600						
Metering function						
Integrated voltage tap at top/bottom		–	–	■	■	■
Voltage tap module VTM		–	–	■	■	■
Type acc. to IEC 61557-12	PMF-I	–	–	■	■	■
	PMF-II	–	–	–	■	■
	PMF-III	–	–	–	–	■
Metering values						
Temperature in/at circuit breaker		–	■	■	■	■
Accuracy class to IEC 61557-12		Accuracy class				
Phase current I_{L1}, I_{L2}, I_{L3}	1	–	–	■	■	■
Neutral conductor current $I_N^{1)}$	1	–	–	■	■	■
Voltage U_L	0.5	–	–	■	■	■
Voltage U_{LN}	0.5	–	–	■	■	■
Active energy E_a	1	–	–	■	■	■
Reactive energy E_r	3	–	–	□	■	■
Apparent energy E_{ap}	1	–	–	□	■	■
Active power P	1	–	–	□	■	■
Reactive power Q	3	–	–	□	■	■
Apparent power S	1	–	–	□	■	■
Power factor PF	1	–	–	□	■	■
Frequency f	0.5	–	–	□	■	■
Accuracy class to manufacturer's specifications		Accuracy class				
Phase current I_{L1}, I_{L2}, I_{L3}	1	■	■	–	–	–
Neutral conductor current $I_N^{1)}$	1	■	■	–	–	–
Neutral conductor current $I_N^{2)}$	2	■	■	■	■	■
Ground-fault current I_g with ETU600 LSI	2	–	–	□	■	■
Ground-fault current I_g with ETU600 LSIG, ETU600 LSIG Hi-Z ³⁾	2	■	■	■	■	■
$\cos \varphi$	6	–	–	□	■	■
Current unbalance I_{nba}	2.5	–	–	□	■	■
Voltage unbalance U_{nba}	1.5	–	–	□	■	■
Total harmonic distortion $THD-I^{4)}$	2	–	–	□	□	■
Total harmonic distortion $THD-U^{4)}$	2	–	–	□	□	■
Harmonic $I, U^{4)}$	2	–	–	□	□	■

¹⁾ For 4-pole with internal current sensor for the N conductor

²⁾ For 3-pole with external current sensor for the N conductor

³⁾ Excluding external transformers/load

⁴⁾ For 2nd to 15th harmonic $\pm 2\%$ and for 16th to 31st harmonic $\pm 5\%$

– Not available

■ Available, feature of the application package

□ Retrofittable using "Metering function extension" function packages

Licenses for activating the test function in SENTRON Powerconfig software

License (ALM)	Test scope	Test values can be set	Documentation	Article No.
Basic (unlimited)	LSIG	No	No	Free available
Standard (365 days)	LSIG	Yes	Yes	7KN2720-OCE00-1YC1
Extended (365 days)	- LSIG - dST - Phase unbalance current - Phase unbalance voltage - Total harmonic distortion (THD) for current and voltage (from Powerconfig V3.28) - Undervoltage, overvoltage - Forward power - Reverse power - Underfrequency - Overfrequency - Phase sequence detection	Yes	Yes	7KN2720-OCE00-2YC1


Connection

Main circuit connection


3WA11 – 3WA13

Fixed-mounted




Withdrawable




Rear horizontal




Rear vertical

Horizontal on top,
vertical at the bottomVertical on top,
horizontal at the bottom




Front connection with double hole




Rear horizontal





Rear vertical

Horizontal on top,
vertical at the bottomVertical on top,
horizontal at the bottom

Front connection with double hole




Flange

Flange on top and
horizontal at bottomFlange on bottom and
horizontal at top


Secondary disconnect terminal

The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.



Screwless connection (push in)



Screw connection (optional)

For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible

- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
 - Non-automatic circuit breakers with 3 blocks
 - Non-automatic circuit breakers with ready4COM feature with 4 blocks
 - Circuit breakers with ETU600 LSI or LSiG with 4 blocks
 - Circuit breakers with ETU600 LSiG-HiZ with 5 blocks
 - Circuit breakers with ETU300 LSi/LSiG with 4 blocks


For dimension drawings, see Equipment Manual – 3WA1 air circuit breakers www.siemens.com/lowvoltage/manuals (109763061)

3WA11 – 3WA13 system overview

Circuit breakers and non-automatic circuit breakers for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

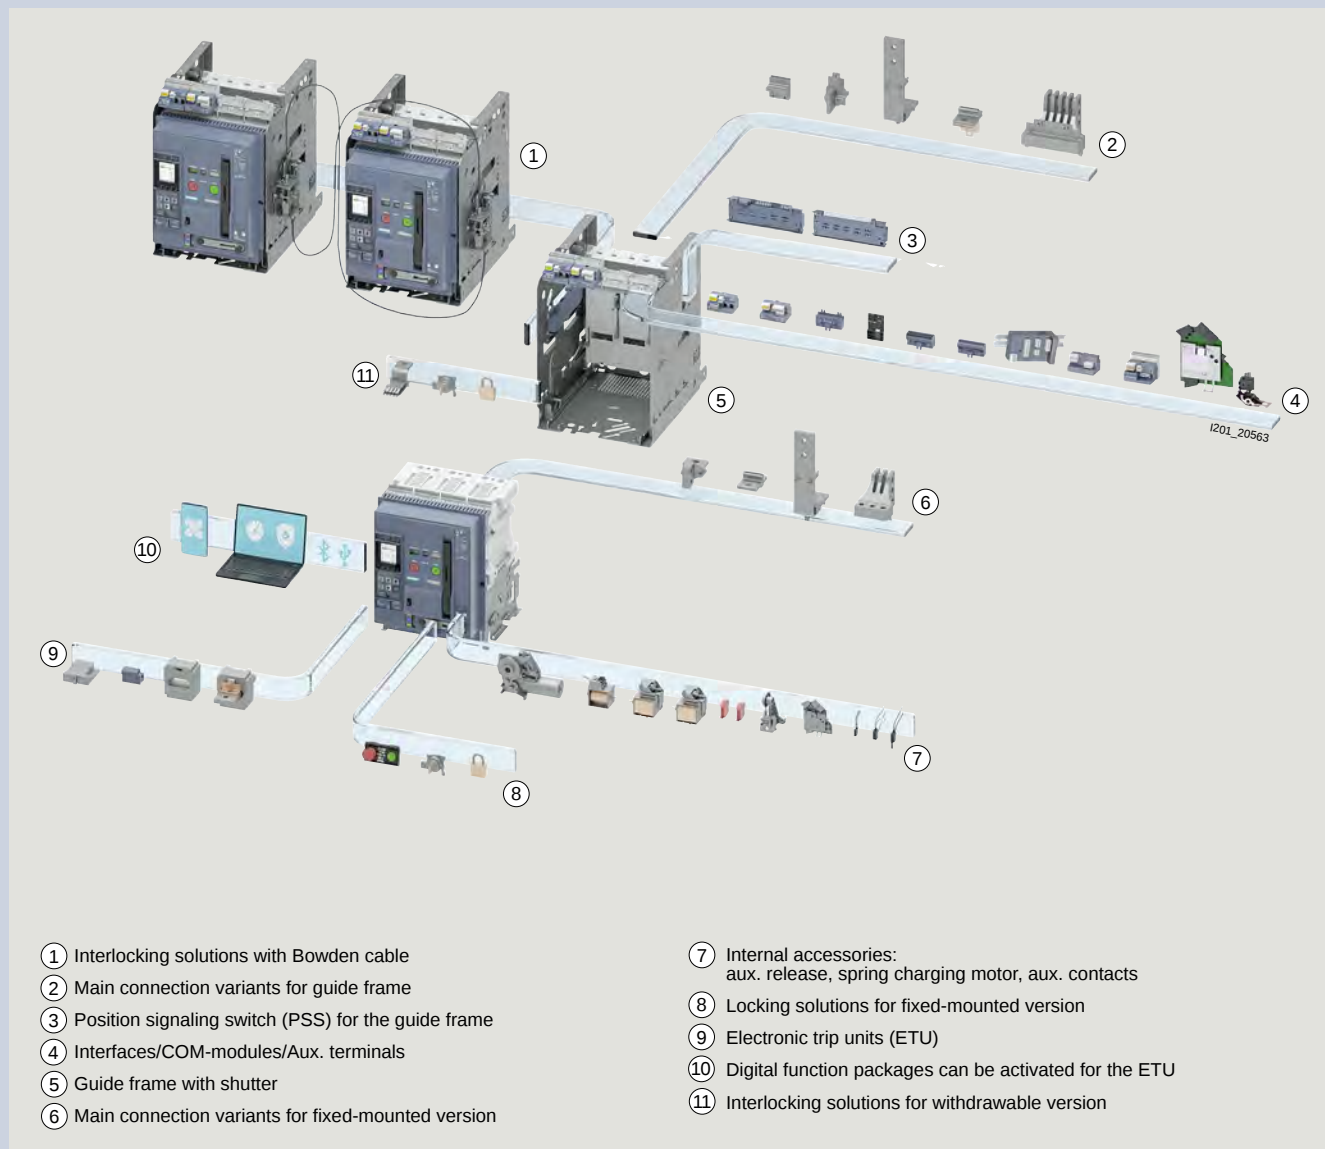


Online configurator highlights


www.siemens.com/lowvoltage/3wa-configurator

Graphical display


- Integration of the legend as a color system
 - Orange: still to be selected
 - Petrol: already selected
 - Gray: preselected (default)
- Graphical highlighting of the individual configuration steps: “What you see is what you get”

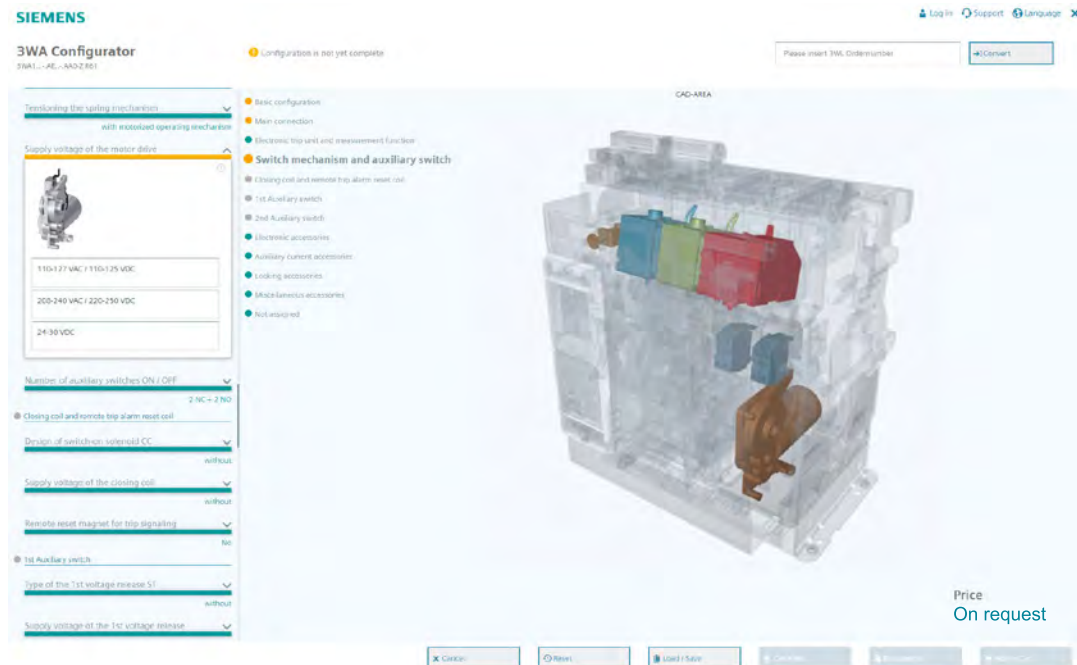

Splitting function (Frame and circuit breaker can be ordered separately)

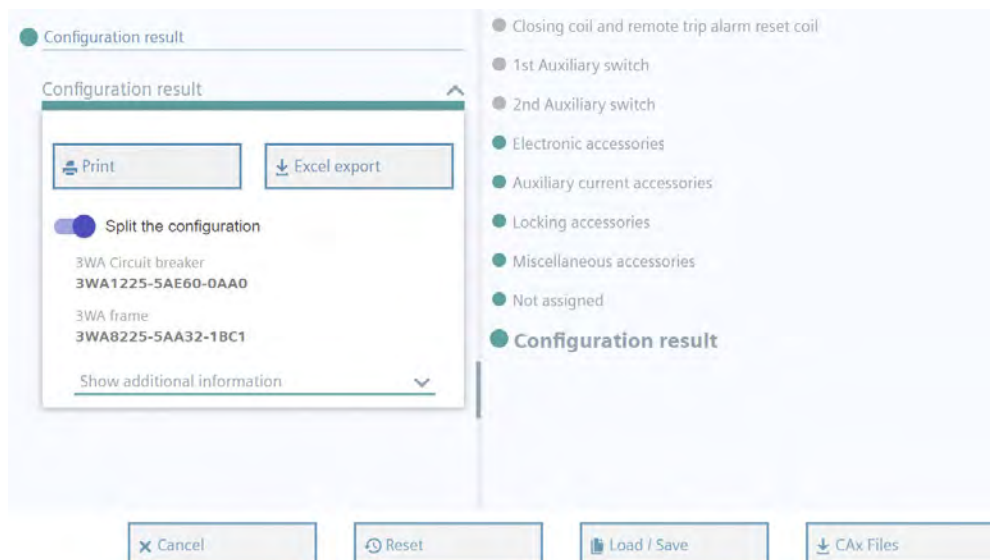

Direct conversion of a 3WL article number to a 3WA article number in the configurator

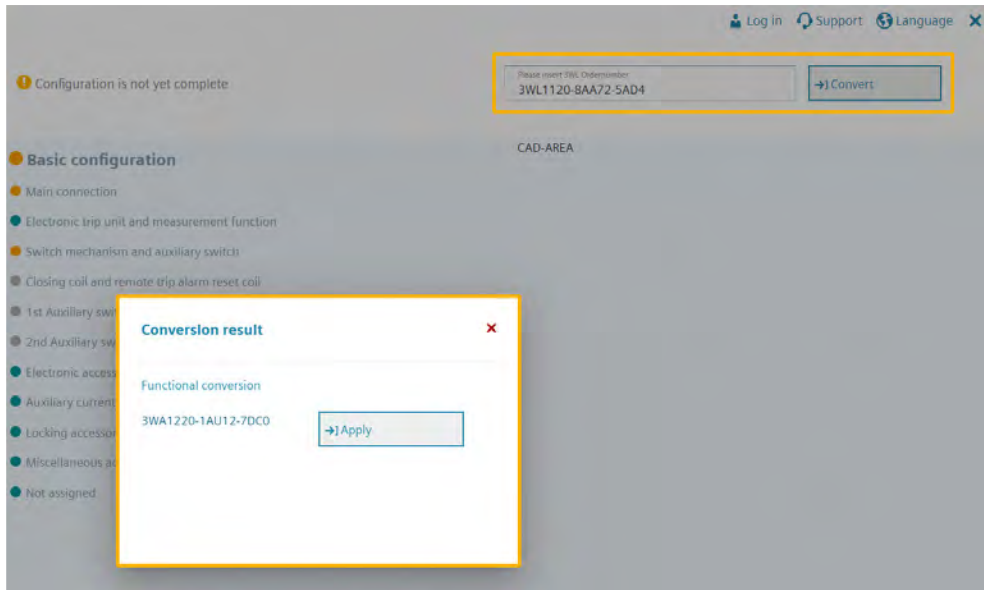

Responsive design (adapted to the differing requirements of the displaying devices)



Dynamic customer price during configuration



Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1				5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers							–					–			
Size (SZ)	1			1											
	2			2											
	3			3											
		SZ 1	SZ 2	SZ 3											
Max. rated current	630 A	■	–	–		0	6								
$I_{n\ max}$	800 A	■	–	–		0	8								
	1000 A	■	–	–		1	0								
	1250 A	■	–	–		1	2								
	1600 A	■	–	–		1	6								
	2000 A	■	■	–		2	0								
	2500 A	■	■	–		2	5								
	3200 A	–	■	–		3	2								
	3600 A	–	■ ¹⁾	–		3	6								
	4000 A	–	■ ¹⁾	■		4	0								
	5000 A	–	–	■		5	0								
	6300 A	–	–	■		6	3								
Short-circuit breaking capacity	N	■	–	–	55/42 kA		2								
I_{cu} at 500/690 V	S	■	■	–	66/50 kA		3								
	M	■	■	–	85/66 kA		4								
	H	■ ²⁾	–	–	100/66 kA		5								
		–	■	■	100/85 kA		5								
	C	–	■	–	130/100 kA		6								
		–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA		6								
Non-automatic circuit breakers²⁾								A	A						
Non-automatic circuit breakers, ready4COM feature³⁾								C	A						
Application packages with protective and metering functions for circuit breakers	ETU300	Protective function		LSI				A	B						
	electronic trip unit			LSIG				A	C						
	ETU600	Current metering						A							
	electronic trip unit	Current metering, ready4COM feature ³⁾						C							
	ETU600	PMF-I		Voltage tap on top				L							
	electronic trip unit with metering function,	Energy efficiency		Voltage tap on bottom				E							
	internal voltage tap in the circuit breaker,	PMF-II Basic Power Monitoring		Voltage tap on top				M							
	power supply of the ETU600 via the VTM680	Monitoring		Voltage tap on bottom				F							
	voltage tap module and ready4COM	PMF-III Advanced Power Monitoring		Voltage tap on top				N							
				Voltage tap on bottom				G							
Protective functions		■	■	■	LSI			E							
		■	■	■	LSIG			F							
		–	■	■	LSIG Hi-Z			G							
Number of poles	Fixed-mounted			3-pole				0							
				4-pole, Neutral left				1							
				4-pole, Neutral right				2							
	Withdrawable	Without position signaling switch		3-pole				3							
				4-pole, Neutral left				4							
				4-pole, Neutral right				5							
		With position signaling switch ⁴⁾		3-pole				6							
				4-pole, Neutral left				7							
				4-pole, Neutral right				8							

¹⁾ Not available for breaking capacity C

²⁾ Available as a circuit breaker, not available as a non-automatic circuit breaker

³⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

⁴⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for “not available”

3WA1

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Size 1

Short-circuit Breaking capacity	N, S, M	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
	H	630 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		800 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1250 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		1600 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–

Size 2

Short-circuit Breaking capacity	S, M, H	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 ^{1) 2)}	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
	C	2000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
		3200 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8

Size 3

Short-circuit Breaking capacity	H	4000 A	1	2	3	5	6	0	1	2	3	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–
	C	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.

Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
			110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
4 NO, 4 NC	8			
Closing coil and remote trip alarm reset coil ¹⁾	Without closing coil	Without remote trip alarm reset coil		A
				B
	With closing coil (CC/CC-COM) ²⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	C
			48 ... 60 V DC	D
			110 ... 127 V AC/110 ... 125 V DC	E
			208 ... 240 V AC/220 ... 250 V DC	F
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	G
			48 ... 60 V DC	H
			110 ... 127 V AC/110 ... 125 V DC	J
			208 ... 240 V AC/220 ... 250 V DC	K
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	L
			48 ... 60 V DC	M
			110 ... 127 V AC/110 ... 125 V DC	N
			208 ... 240 V AC/220 ... 250 V DC	P
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	Q
			48 ... 60 V DC	R
			110 ... 127 V AC/110 ... 125 V DC	S
			208 ... 240 V AC/220 ... 250 V DC	
2nd auxiliary release	Without 2nd auxiliary release	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	A
			48 ... 60 V DC	B
			110 ... 127 V AC/110 ... 125 V DC	C
			208 ... 240 V AC/220 ... 250 V DC	E
				F
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC	G
			48 ... 60 V DC	H
			110 ... 127 V AC/110 ... 125 V DC	J
			208 ... 240 V AC/220 ... 250 V DC	L
				N
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)		24 ... 30 V DC	P
			48 ... 60 V DC	Q
			110 ... 127 V AC/110 ... 125 V DC	R
			208 ... 240 V AC/220 ... 250 V DC	S
			380 ... 415 V AC	T
	With undervoltage release (UVR-t) ³⁾ , adjustable delay 0.2 ... 3.2 s		48 V DC	U
			60 V DC	V
			110 ... 127 V AC/110 ... 125 V DC	
			208 ... 240 V AC/220 ... 250 V DC	
			380 ... 415 V AC	

¹⁾ Remote trip alarm reset coil is not available for non-automatic circuit breakers

²⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

³⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	–	9	10	11	12	–	13	14	15	16
---	---	---	---	---	---	----	----	----	---	----	----	----	----

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC/110 ... 125 V DC	3
		208 ... 240 V AC/220 ... 250 V DC	4
			5
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	6
		48 ... 60 V DC	7
		110 ... 127 V AC/110 ... 125 V DC	8
		208 ... 240 V AC/220 ... 250 V DC	

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1			5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers														
Size (SZ)	1		1											
	2		2											
	3		3											
		SZ 1	SZ 2	SZ 3										
Max. rated current $I_{n \max}$	630 A	■	–	–	0	6								
	800 A	■	–	–	0	8								
	1000 A	■	–	–	1	0								
	1250 A	■	–	–	1	2								
	1600 A	■	–	–	1	6								
	2000 A	■	■	–	2	0								
	2500 A	■	■	–	2	5								
	3200 A	–	■	–	3	2								
	3600 A	–	■	–	3	6								
	4000 A	–	■	■	4	0								
	5000 A	–	–	■	5	0								
	6300 A	–	–	■	6	3								
Short-circuit breaking capacity I_{cu} at 690 V/ 690 V IT network/ 1000 V	E	■	–	–	85/50/50 kA	8								
		–	■	–	85/50/50 kA	8								
		–	–	■	3-pole: 150/50/125 kA 4-pole: 130/50/125 kA	8								
Non-automatic circuit breakers							A	A						
Non-automatic circuit breakers, ready4COM feature ¹⁾							C	A						
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function	LSI				A	B						
			LSIG				A	C						
	ETU600 electronic trip unit	Current metering					A							
		Current metering, ready4COM feature ¹⁾					C							
	ETU600 electronic trip unit with metering function, internal voltage tap in the circuit breaker, VTM640 voltage tap module and ready4COM	PMF-I	Voltage tap on top				U							
		Energy efficiency	Voltage tap on bottom				Q							
		PMF-II Basic Power	Voltage tap on top				V							
		Monitoring	Voltage tap on bottom				R							
		PMF-III Advanced	Voltage tap on top				W							
		Power Monitoring												
			Voltage tap on bottom				S							
	Protective functions	■	■	■	LSI			E						
		■	■	■	LSIG			F						
		–	■	■	LSIG Hi-Z			G						
Number of poles	Fixed-mounted				3-pole	0								
					4-pole, Neutral left	1								
					4-pole, Neutral right	2								
	Withdrawable				3-pole	3								
		Without position signaling switch			4-pole, Neutral left	4								
					4-pole, Neutral right	5								
		With position signaling switch ²⁾			3-pole	6								
					4-pole, Neutral left	7								
					4-pole, Neutral right	8								

¹⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

²⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM: 3 × connected position, 2 × test position, 1 × disconnected position; Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM: 1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for “not available”

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
			—					—			

Connection

Connection		Fixed-mounted					Withdrawable									
		Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom	
Size 1																
Short-circuit Breaking capacity	E	630 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		800 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1250 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		1600 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	–	5	6	0	1	–	–	–	–	–	–	–
Size 2																
Short-circuit Breaking capacity	E	2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	4	–	–	–	–	
		4000 A	1 ¹⁾	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
Size 3																
Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ The dimensions of the 4000 A vertical connections for the 3WA1 differ from those of 3WL1.

Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Structure of the article numbers




Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for 1000 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

3WA1



Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0	
			4 NO, 4 NC	1	
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2	
			4 NO, 4 NC	5	
		48 ... 60 V DC	4 NO, 4 NC	6	
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3	
			4 NO, 4 NC	7	
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4	
		4 NO, 4 NC	8		
Closing coil and remote trip alarm reset coil ¹⁾	Without closing coil	Without remote trip alarm reset coil		A	
		With closing coil (CC/CC-COM) ²⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	B
				48 ... 60 V DC	C
				110 ... 127 V AC/110 ... 125 V DC	D
				208 ... 240 V AC/220 ... 250 V DC	E
			With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	F
				48 ... 60 V DC	G
				110 ... 127 V AC/110 ... 125 V DC	H
				208 ... 240 V AC/220 ... 250 V DC	J
		With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	K
				48 ... 60 V DC	L
				110 ... 127 V AC/110 ... 125 V DC	M
				208 ... 240 V AC/220 ... 250 V DC	N
			With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	P
				48 ... 60 V DC	Q
				110 ... 127 V AC/110 ... 125 V DC	R
				208 ... 240 V AC/220 ... 250 V DC	S
		2nd auxiliary release	Without 2nd auxiliary release		A
With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC			B	
	48 ... 60 V DC			C	
	110 ... 127 V AC/110 ... 125 V DC			D	
	208 ... 240 V AC/220 ... 250 V DC			E	
With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC			F	
	48 ... 60 V DC			G	
	110 ... 127 V AC/110 ... 125 V DC			H	
	208 ... 240 V AC/220 ... 250 V DC			J	
With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC			L	
	48 ... 60 V DC			N	
	110 ... 127 V AC/110 ... 125 V DC			P	
	208 ... 240 V AC/220 ... 250 V DC			Q	
	380 ... 415 V AC			R	
	With undervoltage release (UVR-t) ³⁾ , adjustable delay 0.2 ... 3.2 s			48 V DC	S
				60 V DC	T
				110 ... 127 V AC/110 ... 125 V DC	U
208 ... 240 V AC/220 ... 250 V DC				V	
	380 ... 415 V AC	W			

¹⁾ Remote trip alarm reset coil is not available for non-automatic circuit breakers

²⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

³⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				—				—			

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC/110 ... 125 V DC	3
		208 ... 240 V AC/220 ... 250 V DC	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	5
		48 ... 60 V DC	6
		110 ... 127 V AC/110 ... 125 V DC	7
		208 ... 240 V AC/220 ... 250 V DC	8

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1			5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers and non-automatic circuit breakers														
Size (SZ)	2		2											
	3		3											
			SZ 2	SZ 3										
Max. rated current $I_{n \max}$	2000 A	■	–		2	0								
	2500 A	■	–		2	5								
	3200 A	■	–		3	2								
	4000 A	■	■		4	0								
	5000 A	–	■		5	0								
	6300 A	–	■		6	3								
Short-circuit breaking capacity I_{cu} at 690 V/1000 V/1150 V	E	■	–	85/85/50 kA		8								
		–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA		8								
Non-automatic circuit breakers							A	A						
Non-automatic circuit breakers, ready4COM feature ¹⁾							C	A						
Application packages with protective and metering functions for circuit breakers	ETU300 electronic trip unit	Protective function	LSI				A	B						
			LSIG				A	C						
	ETU600 electronic trip unit	Current metering					A							
		Current metering, ready4COM feature ¹⁾					C							
	Protective functions	■ ■ LSI						E						
		■ ■ LSIG						F						
		■ ■ LSIG Hi-Z						G						
Number of poles	Fixed-mounted			3-pole		0								
				4-pole, Neutral left		1								
				4-pole, Neutral right		2								
	Withdrawable	Without position signaling switch		3-pole		3								
				4-pole, Neutral left		4								
				4-pole, Neutral right		5								
		With position signaling switch ²⁾		3-pole		6								
				4-pole, Neutral left		7								
				4-pole, Neutral right		8								

¹⁾ If ready4COM circuit breakers are ordered with closing coils/shunt trips, these are installed in the factory as communication-capable versions (CC-COM/ST-COM). Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

²⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

3 × connected position, 2 × test position, 1 × disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for "not available".

3WA1

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Size 2

Short-circuit Breaking capacity	E	Fixed-mounted					Withdrawable									
		Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom	
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		2500 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3200 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
		3600 A	–	–	–	–	–	–	–	–	–	4	–	–	–	–
		4000 A	1 ¹⁾	2 ²⁾	–	5	6	0	1 ¹⁾	2 ²⁾	–	–	5	6	–	–

Size 3

Short-circuit Breaking capacity	E	4000 A	1	2	–	5	6	0	1	2	–	4	5	6	–	–
		5000 A	1	2	–	5	6	0	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	0	1	–	–	–	–	–	–	–

¹⁾ Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.

With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

Structure of the article numbers



Basic configuration for AC circuit breakers and AC non-automatic circuit breakers for 1150 V

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC 4 NO, 4 NC	0 1							
				2							
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC 4 NO, 4 NC	2 5							
		48 ... 60 V DC	4 NO, 4 NC	6							
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC 4 NO, 4 NC	3 7							
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC 4 NO, 4 NC	4 8							
Closing coil and remote trip alarm reset coil ¹⁾	Without closing coil	Without remote trip alarm reset coil			A						
					B						
	With closing coil (CC/CC-COM) ²⁾ for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC		C						
			48 ... 60 V DC		D						
			110 ... 127 V AC/110 ... 125 V DC		E						
			208 ... 240 V AC/220 ... 250 V DC		F						
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		G						
			48 ... 60 V DC		H						
			110 ... 127 V AC/110 ... 125 V DC		J						
			208 ... 240 V AC/220 ... 250 V DC		K						
		Without remote trip alarm reset coil	24 ... 30 V DC		L						
			48 ... 60 V DC		M						
			110 ... 127 V AC/110 ... 125 V DC		N						
			208 ... 240 V AC/220 ... 250 V DC		P						
	With closing coil (CC) for momentary duty, 5% OP	With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		Q						
			48 ... 60 V DC		R						
			110 ... 127 V AC/110 ... 125 V DC		S						
			208 ... 240 V AC/220 ... 250 V DC								
2nd auxiliary release	Without 2nd auxiliary release				A						
		With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC		B						
			48 ... 60 V DC		C						
			110 ... 127 V AC/110 ... 125 V DC		D						
			208 ... 240 V AC/220 ... 250 V DC		E						
	With shunt trip (ST), momentary duty 5% OP		24 ... 30 V DC		F						
			48 ... 60 V DC		G						
			110 ... 127 V AC/110 ... 125 V DC		H						
			208 ... 240 V AC/220 ... 250 V DC		J						
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)		24 ... 30 V DC		L						
			48 ... 60 V DC		N						
			110 ... 127 V AC/110 ... 125 V DC		P						
			208 ... 240 V AC/220 ... 250 V DC		Q						
	With undervoltage release (UVR-t) ³⁾ , adjustable delay 0.2 ... 3.2 s		380 ... 415 V AC		R						
			48 V DC		S						
			60 V DC		T						
			110 ... 127 V AC/110 ... 125 V DC		U						
			208 ... 240 V AC/220 ... 250 V DC		V						
			380 ... 415 V AC		W						

¹⁾ Remote trip alarm reset coil is not available for non-automatic circuit breakers

²⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

³⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

3WA1

5	6	7	8	–	9	10	11	12	–	13	14	15	16
---	---	---	---	---	---	----	----	----	---	----	----	----	----

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release	0
	With shunt trip	24 ... 30 V DC
	(ST/ST-COM) ¹⁾ ,	48 ... 60 V DC
	uninterrupted duty 100% OP	110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC
	With shunt trip (ST),	24 ... 30 V DC
	momentary duty 5% OP	48 ... 60 V DC
		110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

Structure of the article numbers



Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

3WA1		5	6	7	8	9	10	11	12	13	14	15	16
					–					–			
Non-automatic circuit breakers													
Size (SZ)	2	2											
		BG 2											
Max. rated current $I_{n \max}$	1000 A	■		1	0								
	2000 A	■		2	0								
	4000 A	■		4	0								
Short-circuit breaking capacity I_{cc}	D	■	25 kA, 600 V DC		1								
	E	■	20 kA, 1000 V DC 20 kA, 1500 V DC ¹⁾		8								
Non-automatic circuit breakers						A	U						
Non-automatic circuit breakers, ready4COM feature ²⁾						C	U						
Number of poles	Fixed-mounted			3-pole		0							
				4-pole		1							
	Withdrawable	Without position signaling switch		3-pole		3							
				4-pole		4							
		With position signaling switch ³⁾		3-pole		6							
				4-pole		7							

Connection

Connection			Fixed-mounted					Withdrawable									
			Vertical	Horizontal	Front connection with double hole	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Without guide frame	Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom	
Size 2	Short-circuit Breaking capacity	D	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
			2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8
			4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8
	E	1000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8	
		2000 A	1	2	3	5	6	0	1	2	3	4	5	6	7	8	
		4000 A	1	2	–	5	6	0	1	2	–	4	5	6	7	8	

¹⁾ 1500 V DC only for 4-pole circuit breakers and for breaking capacity E

²⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71. The circuit breakers are then supplied with standard CC/ST.

³⁾ Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:

3 × connected position, 2 × test position, 1 × disconnected position;

Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:

1 × connected position, 1 × test position, 1 × disconnected position + message through communications interface for disconnected position and for “not available”

3WA1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Operating mechanisms, auxiliary switches and auxiliary releases

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC 4 NO, 4 NC	0 1															
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2															
		48 ... 60 V DC	4 NO, 4 NC	5 6															
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC 4 NO, 4 NC	3 7															
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC 4 NO, 4 NC	4 8															
Closing coil	Without closing coil								A										
	With closing coil (CC/CC-COM) ¹⁾ for uninterrupted duty, 100% OP	24 ... 30 V DC							B										
		48 ... 60 V DC							C										
		110 ... 127 V AC/110 ... 125 V DC							D										
		208 ... 240 V AC/220 ... 250 V DC							E										
	With closing coil (CC) for momentary duty, 5% OP	24 ... 30 V DC							K										
		48 ... 60 V DC							L										
		110 ... 127 V AC/110 ... 125 V DC							M										
		208 ... 240 V AC/220 ... 250 V DC							N										
2nd auxiliary release	Without 2nd auxiliary release									A									
	With shunt trip (ST), uninterrupted duty 100% OP ¹⁾	24 ... 30 V DC							B										
		48 ... 60 V DC							C										
		110 ... 127 V AC/110 ... 125 V DC							D										
		208 ... 240 V AC/220 ... 250 V DC							E										
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC							F										
		48 ... 60 V DC							G										
		110 ... 127 V AC/110 ... 125 V DC							H										
		208 ... 240 V AC/220 ... 250 V DC							J										
	With undervoltage release (UVR), instantaneous (≤ 0.08 s) and short-time delayed (≤ 0.2 s)	24 ... 30 V DC							L										
		48 ... 60 V DC							N										
		110 ... 127 V AC/110 ... 125 V DC							P										
		208 ... 240 V AC/220 ... 250 V DC							Q										
	With undervoltage release (UVR-t) ²⁾ , adjustable delay 0.2 ... 3.2 s	380 ... 415 V AC							R										
		48 V DC							S										
		60 V DC							T										
		110 ... 127 V AC/110 ... 125 V DC							U										
		208 ... 240 V AC/220 ... 250 V DC							V										
		380 ... 415 V AC							W										
1st auxiliary release	Without 1st auxiliary release																		0
	With shunt trip (ST/ST-COM) ¹⁾ , uninterrupted duty 100% OP	24 ... 30 V DC																	1
		48 ... 60 V DC																	2
		110 ... 127 V AC/110 ... 125 V DC																	3
		208 ... 240 V AC/220 ... 250 V DC																	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC																	5
		48 ... 60 V DC																	6
		110 ... 127 V AC/110 ... 125 V DC																	7
		208 ... 240 V AC/220 ... 250 V DC																	8

¹⁾ If the property ready4COM is selected in conjunction with 100% OP closing coils/shunt trips, communication-capable closing coils (CC-COM)/shunt trips (ST-COM) are installed in the factory. Optionally, this communication capability of the 100% OP closing coils/shunt trips can be deselected with option M71.

²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add “-Z” to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Test report

Test report of routine test

P81

Option plug for electronic trip unit

- To reduce the rated current of the circuit breaker
- Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ($I_{n\max}$).
The rated current of the selected option plug must be less than $I_{n\max}$.

Option plug	Rated current I_n	SZ 1	SZ 2	SZ 3	
	250 A	■	■	–	B02
	315 A	■	■	–	B03
	400 A	■	■	–	B04
	500 A	■	■	–	B05
	630 A	■	■	–	B06
	800 A	■	■	■	B08
	1000 A	■	■	■	B10
	1250 A	■	■	■	B12
	1600 A	■	■	■	B16
	2000 A	■	■	■	B20
	2500 A	–	■	■	B25
	3200 A	–	■	■	B32
	3600 A new	–	■	■	B36
	4000 A	–	–	■	B40
	5000 A	–	–	■	B50

IOM230 digital input/output module ¹⁾

Module with 2 inputs and 3 outputs

A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-0EC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting on a DIN rail.

F23

ZSI200 Zone-selective interlocking module ¹⁾

Zone-selective interlocking with ETU600

A module, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor

F20

COM190 communications module ^{1) 2)}

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature

PROFINET IO/Modbus TCP ²⁾

A module including 2 Switched Ethernet ports, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC13.

F19

COM150 communications module ¹⁾

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the ready4COM feature

Modbus RTU

A module with terminal connection and optional internal terminating resistor, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **CubicleBUS**² terminating resistor; two communications modules can be run at the same time. The second communications module must be ordered separately as 3WA9111-0EC15.

F15

¹⁾ When ordering this option for a circuit breaker or a non-automatic air circuit breaker of the installation type “withdrawable version without guide frame”, this must be used as the order option for the guide frame.

²⁾ For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

ready4COM circuit breakers without communication-capable closing coils/shunt trips

Note If this option is used, remote switching directly via communication is no longer possible.

M71

Automatic reset

- Only possible for circuit breakers with an electronic trip unit

Automatic reset Automatic reset of the reclosing lockout after ETU tripping; this option is not required when ordering a circuit breaker with a remote trip alarm reset coil RR.

K01

Circuit breakers with a metering function for connection of an external voltage transformer

- The circuit breaker is equipped with a metering function. The scope of measured values is the same as for the PMF metering function. Unlike the metering function with internal voltage tap, this version is not certified according to IEC 61557-12.
- External voltage transformers are required for the function.
- Only possible for circuit breakers of sizes 2 and 3 with ETU600 and A or C in position 9 of the article number.

Scope of measured values
Metering function

PMF-I
PMF-II
PMF-III

V61

V62

V63

Special approval according to UL 489b in addition to IEC 60947

**DC non-automatic circuit breakers
up to 1500 V**

Sizes 2, 4-pole, 2000 A with $I_{cc} = 20$ kA

Available for:

3WA1220-8AU12-____
3WA1220-8AU42-____
3WA1220-8AU72-____
3WA1220-8CU12-____
3WA1220-8CU42-____
3WA1220-8CU72-____

U09

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Rear main connections (top and bottom) with same pole spacing of phases (only possible for 4-pole circuit breakers with N pole, left)

AC circuit breakers/ AC non-automatic circuit breakers and AC guide frames	Rear vertical		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	D04
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	
	Rear horizontal		Standard	N – L1 160 mm L1 – L2 130 mm L2 – L3 160 mm	
			Option	N – L1 130 mm L1 – L2 160 mm L2 – L3 160 mm	

Tinned version of the main circuit connections on the guide frame

- Only for withdrawable circuit breakers with horizontal connection or flange connection
- Cannot be ordered for circuit breakers without a guide frame
- The normal delivery time increases to 15 work days

Tinned connections	Sizes 1, 2, 3 ¹⁾	D08
--------------------	-----------------------------	-----

Broadened vertical main circuit connection

- Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately

Main circuit connection	For 3WA1, 4000 A, size 2	Compatible with 3WL1240 for retrofit	D01
-------------------------	--------------------------	--------------------------------------	-----

Circuit breakers without Bluetooth function

Circuit breakers without Bluetooth function	In this version of the circuit breaker, Bluetooth is not provided. Neither can Bluetooth be retrofitted by replacing the electronic trip unit.	D80
---	--	-----

Secondary disconnect terminal system

- Can be ordered for circuit breakers with guide frames and for guide frames

Manual connector with screw terminal	With screw connection instead of push-in connection (standard)	N03
Manual connector for ring lugs	With screw connection for ring lugs instead of push-in connection (standard)	N05

Mechanical operating cycles counters

Mechanical operating cycles counter, 5-digit	Can be used with all circuit breakers and non-automatic circuit breakers including those without a spring charging motor	C01
--	--	-----

Signaling switches

Trip alarm switch	2nd trip alarm switch (S25) 1st trip alarm switch included as standard for circuit breakers. Can only be used with circuit breakers with an electronic trip unit without ready4COM.	1 NO K06
-------------------	---	-------------

¹⁾ Not available for size 2, breaking capacity C

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Pushbuttons/disconnect switches/closing lockouts/special packaging/arc chute cover

Emergency OPEN button	Mushroom pushbutton instead of the mechanical OFF pushbutton	C25
Local electric close on operator panel (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Only possible in combination with a closing coil (CC)	With sealing cap C11
		With CES lock C12
Motor disconnect switch on operator panel (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor	C24
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)		P61
Arc chute cover mounted on the guide frame	Not available for: – Fixed-mounted – Breaking capacity C, E and D – 3600/4000 A size 2	R10
Cover for electronic trip unit	Top cover with safety lock (The lower sealable cover of the rotary coding switch is included in the scope of supply of the circuit breaker)	F40

Internal current sensors without energy core for applications with frequency converters

- Used in converter applications with high harmonic components; can only be used for circuit breakers with an ETU600 electronic trip unit
 - External 24 V DC supply required
 - Instantaneous undervoltage release UVR required (15th position in article number: L, N, P, Q)
 - Not possible with instantaneous undervoltage release UVR 380 ... 415 V AC
 - Not possible with delayed undervoltage release UVR-t (15th position in article number: S, T, U, V, W)
 - Additionally contains a relay for monitoring the 24 V DC and warning labels
 - If Z option = K60 is provided, an optional PMF-I to PMF-III metering function is feasible. The accuracy of this metering function is in accordance with the manufacturer's specifications. A certificate according to IEC 61557-12 cannot be provided for this version.

Internal current sensors	Sizes 1, 2, 3	K60
--------------------------	---------------	-----

Mechanical interlocks

- Interlocking module with Bowden cable 2 m

Mechanical interlocks	For fixed-mounted breakers	S55
	For withdrawable circuit breakers with guide frame ¹⁾	R55
	For guide frames (ordered separately)	R56
	For withdrawable circuit breakers (ordered separately)	R57

Locking provisions (for fixed-mounted and withdrawable circuit breakers)

Locking provisions	Against unauthorized closing from the operator panel of the circuit breaker. The disconnect unit fulfills the requirements for main circuit breakers according to EN 60204-1	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL ²⁾	S05
		Assembly kit for padlocks ³⁾	S07
		Made by RONIS	S08
Locking provisions	For charging handle with padlock ³⁾	Made by PROFALUX	S09
			S33

Locking provisions (for withdrawable circuit breaker)

Locking provision to prevent movement of the withdrawable circuit breaker	Safety lock for mounting onto the circuit breaker	Made by CES	S71
		Made by PROFALUX	S75
		Made by RONIS	S76

¹⁾ Not available in combination with R40

²⁾ Locks must be ordered from the manufacturer.

³⁾ Padlock not included in the scope of supply.

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add “-Z” to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Locking provisions against unauthorized closing, for withdrawable circuit breakers

- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced.
- Not possible in combination with order code “R81”, “R85” or “R86”.
- Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately

Made by CES

R61

Made by RONIS

R68

Made by PROFALUX

R60

Locking mechanisms

- R30 and R50 not possible in combination with order code “R81”, “R85” or “R86”.
- R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately
- R40 can only be ordered with the circuit breaker

For fixed-mounted circuit breakers

To prevent opening of the control cabinet door in ON position

S30

For withdrawable circuit breakers

To prevent opening of the control cabinet door in connected position

R30

To prevent activation when the control cabinet door is open ¹⁾

R40

To prevent movement when the control cabinet door is open ²⁾

R50

Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position

- Consisting of Bowden cable and lock in the control cabinet door
- Not possible in combination with order code “R30”, “R50”, “R61”, “R68” or “R60”
- Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately

Made by CES

R81

Made by PROFALUX

R85

Made by RONIS

R86

Increased degree of protection for installation in a control cabinet

Door sealing frame for degree of protection IP41

T40

¹⁾ Not available in combination with R50 and R55

²⁾ Not available in combination with R40

Accessory options

Further technical specifications

Manual operating mechanism

3WA11 – 3WA13

Switching on/charging energy store

Maximum force required to operate the hand lever	≤ 230 N
Required number of strokes on the hand lever	9

Closing coils (CC/CC-COM) ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC

Primary operating range

Primary operating range (acc. to IEC 60947-2)	75 ... 110% U_s
Extended operating range for battery operation	75 ... 126% U_s
Integrated freewheeling diode	Yes

Operation

Version		100% OP	5% OP
Closing power	AC/DC	60 VA/60 W	300 VA/300 W
Continuous power	AC/DC	8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Opening time of the circuit breaker at 100% U_s		80 ms	50 ms

Fuse protection of the control circuit at U_s for closing coil

Fuse gG	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A

Fuse protection of the control circuit at U_s for spring charging motor + closing coil ²⁾

Fuse gG	24 ... 30 V DC	8 A	10 A
	48 ... 60 V DC	8 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	4 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	4 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	8 A	10 A
	48 ... 60 V DC	8 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	4 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	4 A	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

²⁾ With the same control circuit for the closing coil and spring charging motor

Spring charging motor ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC

Primary operating range

Primary operating range (acc. to IEC 60947-2)	85 ... 110% U_s
Extended operating range for battery operation	85 ... 126% U_s

Operation

Closing power	AC/DC	135 VA/135 W
Continuous power	AC/DC	135 VA/135 W
Charging time at 100% U_c		≤ 10 s

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

Spring charging motor ¹⁾

3WA11 – 3WA13

Fuse protection of the control circuit at U_s for spring charging motor

Fuse gG	24 ... 30 V DC	6 A
	48 ... 60 V DC	6 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	6 A
	48 ... 60 V DC	6 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

Undervoltage releases UVR and UVR-t ¹⁾

3WA11 – 3WA13

Rated operational voltage

Rated control supply voltage U_s : UVR	24 ... 30 V DC
	48 ... 60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC
	380 ... 415 V AC

Rated control supply voltage U_s : UVR-t ²⁾	48 V DC
	60 V DC
	110 ... 127 V AC/110 ... 125 V DC
	208 ... 240 V AC/220 ... 250 V DC
	380 ... 415 V AC

Operating limits	Operate voltage	$< 7\% U_s$
	Pick-up voltage	85 ... 126% U_s

Integrated freewheeling diode	Yes
-------------------------------	-----

Closing power	AC/DC	60 VA/50 W
---------------	-------	------------

Continuous power	AC/DC	5 VA/5 W
------------------	-------	----------

Break time

$U_s = 0$ with UVR instantaneous	≤ 80 ms
$U_s = 0$ with UVR short-time delayed	≤ 200 ms
$U_s = 0$ with UVR-t delayed	0.2 ... 3.2 s
With UVR-t by disconnection at terminals X5.13 and X5.14 (EMERGENCY-STOP circuit) (quick shutdown) ²⁾	≤ 100 ms (maximum allowable cable length between the terminals)/cable length ≤ 50 m

Fuse protection of the control circuit

Fuse gG	24 ... 30 V DC (UVR)	2 A
	48 ... 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	2 A
	380 ... 415 V AC	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC (UVR)	4 A
	48 ... 60 V DC (UVR)	4 A
	48 V DC (UVR-t)	4 A
	60 V DC (UVR-t)	4 A
	110 ... 127 V AC/110 ... 125 V DC	4 A
	208 ... 240 V AC/220 ... 250 V DC	6 A
	380 ... 415 V AC	6 A
Automatic circuit breaker with D characteristic	24 ... 30 V DC (UVR)	2 A
	48 ... 60 V DC (UVR)	2 A
	48 V DC (UVR-t)	2 A
	60 V DC (UVR-t)	2 A
	110 ... 127 V AC/110 ... 125 V DC	2 A
	208 ... 240 V AC/220 ... 250 V DC	4 A
	380 ... 415 V AC	4 A

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Accessory options

Further technical specifications

Shunt trip (ST/ST-COM/ST2) ¹⁾

3WA11 – 3WA13

Rated operational voltage			
Rated control supply voltage U_s		24 ... 30 V DC	
		48 ... 60 V DC	
		110 ... 127 V AC/110 ... 125 V DC	
		208 ... 240 V AC/220 ... 250 V DC	
Primary operating range			
Primary operating range (acc. to IEC 60947-2)		75 ... 110% U_s	
Extended operating range for battery operation		75 ... 126% U_s	
Integrated freewheeling diode		Yes	No
Operation			
Version		100% OP	5% OP
Closing power AC/DC	24 ... 30 V DC, 48 ... 60 V DC	60 VA/60 W	300 VA/300 W
	110 ... 127 V AC/110 ... 125 V DC		
	208 ... 240 V AC/220 ... 250 V DC		
Continuous power AC/DC		8 VA/8 W	–
Minimum command time at 100% U_s		60 ms	60 ms
Maximum command time at 100% U_s		–	2000 ms
Make time of the circuit breaker at 100% U_s		80 ms	50 ms
Fuse protection of the control circuit			
Fuse gG	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 127 V AC/110 ... 125 V DC	2 A	4 A
	208 ... 240 V AC/220 ... 250 V DC	2 A	2 A

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

Remote trip alarm reset coil for mechanical tripped indicator (F7) ¹⁾

3WA11 – 3WA13

Rated operational voltage		
Rated control supply voltage U_s		24 ... 30 V DC
		48 ... 60 V DC
		110 ... 127 V AC/110 ... 125 V DC
		208 ... 240 V AC/220 ... 250 V DC
Primary operating range		
Primary operating range (acc. to IEC 60947-2)		85 ... 110% U_s
Operation		
Power consumption	AC/DC	60 VA/60 W
Minimum command time at $1 \times U_s$		60 ms
Fuse protection of the control circuit		
Fuse gG	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC/110 ... 125 V DC	1 A
	208 ... 240 V AC/220 ... 250 V DC	
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A
	48 ... 60 V DC	
	110 ... 127 V AC/110 ... 125 V DC	1 A
	208 ... 240 V AC/220 ... 250 V DC	

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

Contact position-driven auxiliary switches (S1 bis S8) ¹⁾

3WA11 – 3WA13

Type		NO or NC	
Contact reliability		From 1 mA at 5 V DC	
Rated insulation voltage U_i		660 V AC 50/60 Hz	
		660 V DC	
Rated impulse withstand voltage U_{imp}		6 kV	

¹⁾ Technical specifications also apply to 3WL [see page 1/104](#)

Contact position-driven auxiliary switches (S1 bis S8) ¹⁾

3WA11 – 3WA13

Breaking capacity			
Rated operational current I_e	DC12	24 V	10 A
		48 V	8 A
		110 V	3.5 A
		220/240 V	1 A
	DC13	24 V	6 A
		48 V	4 A
		110 V	1.2 A
		220/240 V	0.4 A
		440 V	0.2 A
	AC12	≤ 660 V	10 A
	AC15	≤ 230 V	6 A
		400 V	4 A
		500 V	3 A
		690 V	2 A

¹⁾ Technical specifications also apply to 3WL see page 1/104

Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

3WA11 – 3WA13

Breaking capacity			
Type	NO contact		
Contact reliability	From 1 mA at 5 V DC ¹⁾		
Rated insulation voltage U_i	250 V DC/250 V AC		
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.22 A
		110/127 V	0.22 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

¹⁾ To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

Trip alarm switches (S24, S25)

3WA11 – 3WA12

Breaking capacity			
1st trip alarm switch S24	CO contact		
2nd trip alarm switch S25	NO contact		
Contact reliability	From 1 mA at 5 V DC ¹⁾		
Rated insulation voltage U_i	250 V AC 50/60 Hz 250 V DC		
Rated operational current I_e	DC12	24 V	5 A
		60 V	0.4 A
		110/127 V	0.4 A
		220/240 V	0.2 A
	DC13	24 V	2.5 A
		60 V	0.2 A
		110/127 V	0.2 A
		220/240 V	0.1 A
	AC12	≤ 240 V	6 A
	A300 AC	≤ 250 V	6 A
	R300 DC	110 ... 125 V	0.22 A
		220 ... 240 V	0.11 A
	AC15	220 V	5 A
		240 V	4 A

¹⁾ To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

Accessory options

Further technical specifications

Position signaling switches on guide frame ¹⁾

3WA11 – 3WA13

Type	Changeover contact (not COM)			
Contact reliability from ¹⁾	1 mA at 5 V DC			
Rated insulation voltage U_i	250 V, 50/60 Hz			
Rated impulse withstand voltage U_{imp}	4 kV			
Connection type				
PSS321	Spring-loaded terminal or push-in (depending on version)			
PSS600	Push-in			
PSS111 COM	• COM contacts: Push-in • Other contacts: Spring-loaded terminal or push-in			
PSS400 COM	Push-in			
Conductor cross-section that can be connected by customer				
Spring-type terminals	1 × 0.2 mm ² (AWG 28) ... 1 × 2.5 mm ² (AWG 14)			
Push-in solid	1 × 0.5 mm ² (AWG 20) ... 1 × 2.5 mm ² (AWG 14)			
Push-in finely stranded with end sleeve	1 × 0.5 mm ² (AWG 20) ... 1 × 1.5 mm ² (AWG 16)			
Breaking capacity				
Rated operational current I_e	Utilization category according to IEC 60947-5	DC12	24 V	5 A
			60 V	0.4 A
			127 V	0.4 A
			220/240 V	0.2 A
		DC13	24 V	2.5 A
			60 V	0.22 A
			127 V	0.22 A
			250 V	0.2 A
		AC12	≤ 240 V AC	6 A
			250 V	4 A
		AC15	250 V	4 A
			220 V	5 A

The COM (X89) contacts may only be connected to the communications module.

¹⁾ To ensure contact reliability at 1 mA, the contacts are gold-plated. If 1 mA is exceeded, the gold-plating is eroded. As a consequence, contact reliability at 1 mA can no longer be ensured.

ETU600

3WA11 – 3WA13

Power supply		
Required power supply design		DC power supply unit with safety requirements according to IEC 61558-1/IEC 62368-1/ANSI/UL 62368-1
Rated control supply voltage U_s	DC	24 V
Primary operating range		$U_s \pm 20\%$
Power consumption		2.9 W
Max. current consumption		0.12 A
Max. starting current		0.35 A
Overvoltage category		CAT I
Integrated short-circuit protection		Yes
Protected against polarity reversal		Yes

Summary of power consumption data

Composants	Voltage	Power consumption
ETU600	24 V DC	2.9 W
Closing coil CC/CC-COM 100% OP	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Closing coil CC/CC-COM 5% OP	24 ... 30 V DC	300 W
	48 ... 60 V DC	300 W
	110 ... 127 V AC/110 ... 125 V DC	300 VA/300 W
	208 ... 240 V AC/220 ... 250 V DC	300 VA/300 W
Shunt trip ST/ST-COM 100% OP	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Shunt trip ST/ST-COM 5% OP	24 ... 30 V DC	300 W
	48 ... 60 V DC	300 W
	110 ... 127 V AC/110 ... 125 V DC	300 VA/300 W
	208 ... 240 V AC/220 ... 250 V DC	300 VA/300 W
Spring charging motors	24 ... 30 V DC	135 W
	48 ... 60 V DC	135 W
	110 ... 127 V AC/110 ... 125 V DC	135 VA/135 W
	208 ... 240 V AC/220 ... 250 V DC	135 VA/135 W
Remote trip alarm reset coils	24 ... 30 V DC	60 W
	48 ... 60 V DC	60 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/60 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/60 W
Undervoltage releases (UVR/UVR-t)	24 V DC	50 W
	30 V DC	50 W
	48 V DC	50 W
	60 V DC	50 W
	110 ... 127 V AC/110 ... 125 V DC	60 VA/50 W
	208 ... 240 V AC/220 ... 250 V DC	60 VA/50 W
	380 ... 415 V AC	60 VA
IOM230	24 V DC	1.25 W
IOM350	24 V DC	1.25 W
COM190/COM150	24 V DC	1.7 W

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

		5	6	7	8	9	10	11	12	13	14	15	16
3WA8					–	A	A			–			
Guide frames													
Size	1	1											
	2	2											
	3	3											
		SZ 1	SZ 2	SZ 3									
Max. rated current $I_{n \max}$	630 ... 1000 A	■	–	–	1	0							
	1250 ... 1600 A	■	–	–	1	6							
Note:	2000 A	■	■	–	2	0							
Generate the selection of positions 6, 7 and 8 according to the list below	2500 A	■	■	–	2	5							
	2000 ... 3200 A	–	■	–	3	2							
	4000 A	–	■	■	4	0							
	4000 ... 5000 A	–	–	■	5	0							
	6300 A	–	–	■	6	3							
Short-circuit breaking capacity I_{cu}	At 500/690 V	N	■	–	–	55/42 kA	2						
		S	■	■	–	66/50 kA	3						
		M	■	■	–	85/66 kA	4						
		H	■	–	–	100/66 kA	5						
			–	■	■	100/85 kA	5						
		C	–	■	–	130/100 kA	6						
			–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA	8						
Note:	At 690/1000/1150 V	E	■	–	–	80/50 kA/–	8						
Generate the selection of positions 6, 7 and 8 according to the list below			–	■	–	85/85/50 kA	8						
			–	–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA	8						
Number of poles	3-pole											3	
	4-pole, Neutral left											4	

The following combinations of positions 6, 7 and 8 of the article number are technically feasible

Size	Breaking capacity at $I_{n \max}$	630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	5000 A	6300 A
Representation 6, 7, 8												
1	N	10-2	10-2	10-2	16-2	16-2	20-3	25-3	–	–	–	–
	S	10-3	10-3	10-3	16-3	16-3	20-3	25-3	–	–	–	–
	M	20-4	20-4	20-4	20-4	20-4	20-4	25-4	–	–	–	–
	H	20-5	20-5	20-5	20-5	20-5	20-5	25-5	–	–	–	–
	E	20-8	20-8	20-8	20-8	20-8	20-8	25-8	–	–	–	–
2	S	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	M	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	H	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	E	–	–	–	–	–	20-8	25-8	32-8	40-8	–	–
	C	–	–	–	–	–	32-6	32-6	32-6	–	–	–
3	H	–	–	–	–	–	–	–	–	40-5	50-5	63-5
	E	–	–	–	–	–	–	–	–	50-8	50-8	63-8
	C	–	–	–	–	–	–	–	–	50-8	50-8	63-8

3WA8

5

6

7

8

9

10

11

12

13

14

15

16

Connection

Withdrawable

Vertical	Horizontal	Front connection with double hole	Flange	Vertical on top/horizontal at the bottom	Horizontal on top/vertical at the bottom	Flange on top/horizontal at the bottom	Horizontal on top/flange at the bottom
----------	------------	-----------------------------------	--------	--	--	--	--

Size 1

Short-circuit Breaking capacity	N, S, M, E	630 A	1	2	3	4	5	6	7	8
		800 A	1	2	3	4	5	6	7	8
		1000 A	1	2	3	4	5	6	7	8
		1250 A	1	2	3	4	5	6	7	8
		1600 A	1	2	3	4	5	6	7	8
		2000 A	1	2	3	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–
	H	630 A	1	2	–	4	5	6	7	8
		800 A	1	2	–	4	5	6	7	8
		1000 A	1	2	–	4	5	6	7	8
		1250 A	1	2	–	4	5	6	7	8
		1600 A	1	2	–	4	5	6	7	8
		2000 A	1	2	–	4	5	6	7	8
		2500 A	1	–	–	–	–	–	–	–

Size 2

Short-circuit Breaking capacity	S, M, H, E	2000 A	1	2	3	4	5	6	7	8
		2500 A	1	2	3	4	5	6	7	8
		3200 A	1	2	3	4	5	6	7	8
		3600 A	–	–	–	4	–	–	–	–
		4000 A	1 ¹⁾	2 ²⁾	–	–	5	6	–	–
	C	2000 A	1	2	–	4	5	6	7	8
		2500 A	1	2	–	4	5	6	7	7
		3200 A	1	2	–	4	5	6	7	7

Size 3

Short-circuit Breaking capacity	H	4000 A	1	2	3	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–
	E, C ³⁾	4000 A	1	2	–	4	5	6	–	–
		5000 A	1	2	–	–	5	6	–	–
		6300 A	1	–	–	–	–	–	–	–

¹⁾ The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.

²⁾ Also available for 4-pole circuit breakers with Z option D04: rear main connections (top and bottom) with same pole spacing of phases (only for N pole, left).

³⁾ 130 kA for 4-pole circuit breakers

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

		5	6	7	8	—	9	10	11	12	13	14	15	16
						—	A	A			1			1
Push-in connection ¹⁾	SZ 1, SZ 2, SZ 3	X7, X6, X5		Non-automatic circuit breakers without ready4COM feature									A	
		X8, X7, X6, X5		Circuit breakers/non-automatic circuit breakers with ready4COM feature									B	
	SZ 2, SZ 3	X9, X8, X7, X6, X5		Including external trip controller ETC600 for circuit breakers with ETU600 LSIG Hi-Z									K	
Position signaling switch	Without position signaling switch												A	
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)												C	
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module												G	

¹⁾ Conversion to screw connection is possible with Z option N03.

Guide frames for DC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

		5	6	7	8	9	10	11	12	13	14	15	16
3WA8					–	A	U			–	1		1
Guide frames													
Size (SZ)	2	2											
Max. rated current $I_{n\ max}$	2000 A		2	0									
	4000 A		4	0									
Short-circuit breaking capacity	D	≤ 600 V DC	25 kA at 600 V DC		1								
	E	≤ 1000 V DC	20 kA at 1000 V DC		8								
		≤ 1500 V DC	20 kA at 1500 V DC ¹⁾		8								
Number of poles	3-pole							3					
	4-pole							4					
Connection	Withdrawable	Vertical						1					
		Horizontal						2					
		Front double hole						3					
		Flange						4					
		Vertical on top/horizontal at the bottom						5					
		Horizontal on top/vertical at the bottom						6					
		Flange on top/horizontal at the bottom						7					
		Horizontal on top/flange at the bottom						8					
Secondary disconnect terminal	Push-in connection	X7, X6, X5		Non-automatic circuit breakers							A		
		X8, X7, X6, X5		Non-automatic circuit breakers with ready4COM							B		
Position signaling switch	Without position signaling switch											A	
	Position signaling switch PSS (3 × connected position, 2 × test position, 1 × disconnected position)											C	
	Position signaling switch PSS-COM (1 × connected position, 1 × test position, 1 × disconnected position) plus connection to a communications module											G	

¹⁾ 1500 V DC applications only possible with 4-pole circuit breakers and breaking capacity E.

Accessories and spare parts

Accessories for electronic trip unit

Electronic trip unit



- Note:** The electronic trip unit is supplied without an option plug. The option plug must be ordered separately. The range of functions of the ETU600 corresponds to the "Current metering" application package.

Basic protective functions	Article No.
ETU300 LSI/LSIG	3WA9111-0EE32
ETU600 LSI/LSIG with Bluetooth and USB interface	3WA9111-0EE62
ETU600 LSI/LSIG Hi-Z with Bluetooth and USB interface	3WA9111-0EE63
Retrofit kit for ETU600 LSI/LSIG new	Artikel-Nr.
Retrofit kit for ETU600 LSI/LSIG for replacing an existing ETU300 in the circuit breaker.	3WA9111-0EE83
Note: The ETU600 LSI/LSIG and the option plug must be ordered separately.	

Spare part battery for ETU600



	Article No.
	3WA9111-0EE81

Option plug



Basic configuration	Rated current I_n	SZ 1	SZ 2	SZ 3	Article No.
Protective function LSI: LT, ST, INST					3WA9111-0EB ..
Protective function LSIG: LT, ST, INST, GF (ground-fault protection GFx with extended setting range)					3WA9111-0EX ..
	250 A	■	■	–	02
	315 A	■	■	–	03
	400 A	■	■	–	04
	500 A	■	■	–	05
	630 A	■	■	–	06
	800 A	■	■	■	08
	1000 A	■	■	■	10
	1250 A	■	■	■	12
	1600 A	■	■	■	16
	2000 A	■	■	■	20
	2500 A	■	■	■	25
	3200 A	–	■	■	32
	3600 A new	–	■	■	36
	4000 A	–	■	■	40
	5000 A	–	–	■	50
	6300 A	–	–	■	63

Function packages for ETU600




Protective and alarm functions	Article No.
Ground fault alarm (GF alarm)	3WA9111-0ES01
Directional short-time-delayed short-circuit protection (dST) and reverse power protection (RP) ¹⁾	3WA9111-0ES05
Enhanced protective functions (EPF) ¹⁾	Article No.
Full package with unbalance, voltage, active power, frequency, THD and phase sequence detection	3WA9111-0ES11
Phase unbalance current and phase unbalance voltage	3WA9111-0ES12
Undervoltage and overvoltage	3WA9111-0ES13
Active power import and active power export	3WA9111-0ES14
Underfrequency and overfrequency	3WA9111-0ES15
Total harmonic distortion for current and voltage	3WA9111-0ES16
Phase sequence detection	3WA9111-0ES17
Functional expansions	Article No.
Second protection parameter set	3WA9111-0ES21
Waveform memory	3WA9111-0ES24
Condition monitoring (retrofitting only possible for ETU600 with ready4COM application package) new	3WA9111-0ES25
Extended metering function	Article No.
Upgrade to metering values of the metering function PMF-II Basic Power Monitoring (metering values, see catalog page 1/25)	3WA9111-0ES52
Upgrade to metering values of the metering function PMF-III Advanced Power Monitoring (metering values, see catalog page 1/25)	3WA9111-0ES53
Upgrade of properties following replacement of ETU600 ²⁾ new	Article No.
The functionality of the ETU600 corresponds to the PMF-II application package on the day the circuit breaker is delivered	3WA9111-0ES82
The functionality of the ETU600 corresponds to the PMF-III application package on the day the circuit breaker is delivered	3WA9111-0ES83

¹⁾ Requires an internal voltage tap and a voltage tap module

²⁾ All metering values from the metering function comply with the manufacturer's accuracy specifications

Accessories for electronic trip unit

Licenses to activate test function in SENTRON Powerconfig software			
	Version		Article No.
	Standard test license for testing the protective functions of SENTRON circuit breakers. The license is time-limited to 365 days.		7KN2720-OCE00-1YC1
	Advanced test license for testing the protective functions and the enhanced protective functions (EPF) of the SENTRON circuit breakers. The license is time-limited to 365 days.		7KN2720-OCE00-2YC1
Upgrading to ready4COM feature through BSS200 breaker status sensor for ETU600			
	Version		Article No.
	- Gathers information about the statuses of the circuit breaker via signaling switches and transmits it to the CubicleBUS² - Controls the communication-capable CC-COM closing coil and the ST-COM shunt trip in a circuit breaker with the ready4COM feature - The BSS200 breaker status sensor is fitted in every circuit breaker with ETU600 of the ready4COM application package and with the PMF-I to PMF-III metering function		3WA9111-0EC40
External current sensors for the N conductor			
	Version	Size	Article No.
	For mounting on busbar	1	3WA9111-0AA21
		2	3WA9111-0AA22
		3	3WA9111-0AA23
	For busbar connection DIN connection	1	3WA9111-0AA31
		2	3WA9111-0AA32
		3	3WA9111-0AA33
Sealable and lockable covers			
	The scope of supply includes both the top cover with safety lock and the sealable bottom cover of the rotary coding switches.		
	Accessory for		Article No.
	ETU300		3WA9111-0EM21
ETU600		3WA9111-0EM22	
Adapter for connecting the ETU300 to the TD400			
	Version		Article No.
	Via the adapter, the ETU300 can be connected to the TD400 to supply it with an external voltage. There is no parameterization or documentation option via SENTRON Powerconfig. Note: The TD400 test device, including description and article number, can be found in the chapter Molded case circuit breakers, see page 2/69		3VW9011-0AT46
Automatic reset of the reclosing lockout			
	Version		Article No.
	Spare part for option K01 or for retrofitting		3WA9111-0EM31
Remote trip alarm reset coils ¹⁾			
	- For mechanical tripped indicator - Including automatic reset of the reclosing lockout 3WA9111-0EM31		
	Voltage		Article No.
	24 ... 30 V DC		3WA9111-0EM42
	48 ... 60 V DC		3WA9111-0EM44
	110 ... 127 V AC/110 ... 125 V DC		3WA9111-0EM45
	208 ... 240 V AC/220 ... 250 V DC		3WA9111-0EM46
Second tripping solenoid (F6) with reclosing lockout			
	Version		Article No.
	For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal		3WA9111-0EM61

¹⁾ Article numbers also apply to 3WL [see page 1/109](#)

¹⁾ Article numbers also apply to 3WL [see page 1/109](#)

Accessories and spare parts

Accessories for electronic trip unit

External trip controller ETC600



Version


Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail

Article No.

3WA9111-0EM62

Locking provisions and interlocks

Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version

Without safety lock

Made by CES

Made by IKON

Article No.

3WA9111-0BA21

3WA9111-0BA22

3WA9111-0BA23

Locking provision against unauthorized closing from the operator panel



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Type

Made by CES

Made by IKON

Assembly kit FORTRESS¹⁾ or CASTELL²⁾

Made by KIRK-Key³⁾

Assembly kit for padlocks

Made by RONIS

Made by PROFALUX

Scope of supply

Locks, cylinders and keys included (S01)

Locks, cylinders and keys included (S03)

Without locks, cylinders or keys (S05)

Without locks, cylinders or keys (S06)

Without padlock (S07)

Locks, cylinders and keys included (S08)

Locks, cylinders and keys included (S09)

Article No.

3WA9111-0BA35

3WA9111-0BA36

3WA9111-0BA31

3WA9111-0BA33

3WA9111-0BA37

3WA9111-0BA32

3WA9111-0BA34

Locking provision against unauthorized closing of the withdrawable circuit breaker



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Type

Made by CES

Made by IKON

Made by KIRK-Key³⁾

Made by RONIS

Made by PROFALUX

Scope of supply

Locks, cylinders and keys included

Locks, cylinders and keys included

Without locks, cylinders or keys

Locks, cylinders and keys included

Locks, cylinders and keys included

Article No.

3WA9111-0BA51

3WA9111-0BA53

3WA9111-0BA57

3WA9111-0BA58

3WA9111-0BA50

Locking provisions for charging handle with padlock



Version

Spare part for S33

Scope of supply

Without padlock

Article No.

3WA9111-0BA71

Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Type

Made by CES

Made by IKON

Made by PROFALUX

Made by RONIS

Made by KIRK-Key³⁾

Scope of supply

Locks, cylinders and keys included

Locks, cylinders and keys included

Locks, cylinders and keys included

Locks, cylinders and keys included

Without locks, cylinders or keys

Article No.

3WA9111-0BA73

3WA9111-0BA75

3WA9111-0BA76

3WA9111-0BA77

3WA9111-0BA80

Locks, cylinders and keys must be ordered from the manufacturer:

¹⁾ Suitable lock FORTRESS CLIS X005.

²⁾ Suitable lock CASTELL FS2.

³⁾ Suitable cylinder lock KIRK Key C 900-301.

Locking provisions and interlocks

Interlocking systems



- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WA9111-0BA43

Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position



- Consisting of Bowden cable and the breaker mechanism in the control cabinet door
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WA9111-0BA81
Made by IKON	3WA9111-0BA82
Made by PROFALUX	3WA9111-0BA83
Made by RONIS	3WA9111-0BA84

Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed



- Defeatable
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version		Article No.
Spare part for option S30	Fixed-mounted circuit breaker	3WA9111-0BB12
Spare part for option R30	Guide frames	3WA9111-0BB13

Locking mechanisms to prevent movement when the control cabinet door is open



- Mounted on guide frame
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WA9111-0BB15

Mechanical interlocks



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	Circuit breaker and guide frame when ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WA9111-0BB21
Module for withdrawable circuit breakers with guide frame	–	Option R55 ¹⁾	3WA9111-0BB22
Module for guide frame	✓	Option R56	3WA9111-0BB23
Module for withdrawable circuit breaker	✓	Option R57	3WA9111-0BB24
Adapter for size 3 withdrawable circuit breaker	✓	–	3WA9111-0BB25

Coupling on the circuit breaker for mutual interlocking with Bowden cable



- Can be used in all circuit breakers

Article No.
3WA9111-0BB31

Bowden cable for mutual mechanical interlocking



Length	Article No.
2000 mm	3WA9111-0BB41
3000 mm	3WA9111-0BB42
4500 mm	3WA9111-0BB43

¹⁾ Not available in combination with R40

Accessories and spare parts

Indicators and control elements

Ready-to-close signaling switches (S20)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH01

1st trip alarm switch (S24)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH02

2nd trip alarm switch (S25)



- Can only be used with a circuit breaker with an electronic trip unit without ready4COM
- The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WA9111-0AH03

Mechanical operating cycles counter (5-digit)



Version	For circuit breakers/non-automatic circuit breakers	Article No.
Spare part for option C01	With manual operating mechanism	3WA9111-0AH04
	With spring charging motor	3WA9111-0AH05

Spring charge signaling switch (S21)



- Standard when a spring charging motor is installed to charge the stored energy mechanism
- When a spring charging motor is retrofitted, the spring charge signaling switch can also be retrofitted

Contacts	Article No.
1 NO	3WA9111-0AH06

Position signaling switch for withdrawable circuit breakers



- All conventional contacts are implemented as changeover contacts.

Contacts	Version	Article No.
PSS321	3 × connected position, 2 × test position, 1 × disconnected position	3WA9111-0AH11
PSS111-COM	1 × connected position, 1 × test position, 1 × disconnected position and option for connection to a communications module COM (Signal: "disconnected position" and "absent")	3WA9111-0AH12
PSS400-COM	4 × connected position and option for connection to a communications module COM (Signal: "disconnected position" and "absent")	3WA9111-0AH13
PSS600	6 × connected position	3WA9111-0AH14
PSS111	1 × connected position, 1 × test position, 1 × disconnected position	3WA9111-0AH15

Local electric close (S10) for operator panel



- Scope of supply: Button + wiring
- Not possible with motor disconnect switch
- Note:** Possible only for circuit breakers with closing coil

Version	Article No.
With sealing cap, spare part for option C11	3WA9111-0AH21
With CES assembly kit, spare part for option C12	3WA9111-0AH22
With IKON assembly kit	3WA9111-0AH23

Motor disconnect switch (S12)



- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

Version	Article No.
Spare part for option C24	3WA9111-0AH24

Emergency OPEN button



- Mushroom pushbutton instead of local mechanical open

Version	Article No.
Spare part for option C25	3WA9111-0AH25

Secondary disconnect terminals for circuit breakers and guide frames

- For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible
- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
 - Non-automatic circuit breakers with 3 blocks
 - Non-automatic circuit breakers with ready4COM feature with 4 blocks
 - Circuit breakers with ETU600 LSI or LSI with 4 blocks
 - Circuit breakers with ETU600 LSI-HiZ with 5 blocks

Secondary disconnect terminal			
	Version	Type	Article No.
	Base part ①		3WA9111-0AB01
			
	1000 V extension ①		3WA9111-0AB02
	Manual connector ②	Screw connection	3WA9111-0AB03
		Push-in connection	3WA9111-0AB04
		Ring lug connection	3WA9111-0AB05
	Coding kits ③	For secondary disconnect terminal blocks X5 to X9 for fixed-mounted circuit breakers	3WA9111-0AB07
	Sliding contact module ④	For guide frames	3WA9111-0AB08
	Blanking block		3WA9111-0AB12

For a complete secondary disconnect terminal block, you must order:

Fixed-mounted version: ① + ② + ③

Withdrawable version: ① + ④ + ②

¹⁾ Secondary disconnect terminal for circuit breakers with breaking capacity C and E must be ordered separately

Auxiliary releases

Closing coil (CC)/shunt trip (ST) ¹⁾



- Suitable for uninterrupted duty

Version	Voltage	Article No.
100% OP	24 ... 30 V DC	3WA9111-0AD02
Switching time ≤ 80 ms	48 ... 60 V DC	3WA9111-0AD04
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD05
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD06

Closing coil (CC-COM)/shunt trip (ST-COM)



- Suitable for uninterrupted duty

Version	Voltage	Article No.
For circuit breakers and non-automatic circuit breakers with the ready4com feature	24 ... 30 V DC	3WA9111-0AD32
100% OP	48 ... 60 V DC	3WA9111-0AD34
Switching time ≤ 80 ms	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD35
Switching time via COM ≤ 120 ms	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD36

¹⁾ Article numbers also apply to 3WL see page 1/114

Accessories and spare parts

Auxiliary release

Closing coils (CC) ¹⁾



- For momentary duty, with cut-off switch S15 (NC)

Version	Voltage	Article No.
5% OP	24 ... 30 V DC	3WA9111-0AD12
Switching time 50 ms	48 ... 60 V DC	3WA9111-0AD14
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD15
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD16

Shunt trips (ST) ¹⁾



- For momentary duty, with cut-off switch S14 (NO)

Version	Voltage	Article No.
5% OP	24 ... 30 V DC	3WA9111-0AD22
Switching time 50 ms	48 ... 60 V DC	3WA9111-0AD24
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AD25
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AD26

Capacitor trip device



- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trips.

Rated control supply voltage/rated operational voltage	Article No.
50/60 Hz AC	DC
208 ... 240 V	220 ... 250 V
	3WA9111-0AD81

Undervoltage release (UVR) ¹⁾



Version	Voltage	Article No.
Instantaneous ≤ 0.08 s (UVR) and short-time delayed ≤ 0.2 s	24 ... 30 V DC	3WA9111-0AE02
	48 ... 60 V DC	3WA9111-0AE04
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AE05
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed (UVR-t) ²⁾ adjustable delay 0.2 ... 3.2 s	48 V DC	3WA9111-0AE13
	60 V DC	3WA9111-0AE14
	110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AE15
	208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

¹⁾ Article numbers also apply to 3WL see page 1/114

²⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Operating mechanism ¹⁾

Spring charging motor to charge the stored energy mechanism



Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 127 V AC/110 ... 125 V DC	3WA9111-0AF05
208 ... 240 V AC/220 ... 250 V DC	3WA9111-0AF06

¹⁾ Article numbers also apply to 3WL see page 1/114

Auxiliary contacts

Auxiliary switches (AUX)



Contacts	Article No.
2 NO + 2 NC	3WA9111-0AG01
2 NO	3WA9111-0AG02
1 NO + 1 NC	3WA9111-0AG03

Door sealing frame, protective cover

Door sealing frame



Version	Article No.
Spare part for option T40	3WA9111-0AP01

Protective covers IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WA9111-0AP03

Arc chute, arc chute cover


Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V AC	1	N, S	3WA9111-0AS01
		M	3WA9111-0AS02
	2	S, M, H	3WA9111-0AS10
		C	3WA9111-0AS11
	3	H	3WA9111-0AS17
		C	3WA9111-0AS18
1000 V AC	1	E	For fixed-mounted breakers 3WA9111-0AS04
			For withdrawable circuit breakers 3WA9111-0AS05
	2	E	3WA9111-0AS12
			3WA9111-0AS18
	3	E	3WA9111-0AS18
			3WA9111-0AS14
600 V DC	2	D	3WA9111-0AS13
1000 V DC	2	E	3WA9111-0AS14

Arc chute cover

- Parts kit for guide frame
- Spare part for option R10
- Not available for:
 - Breaking capacity C, D and E
 - 4000 A size 2



Number of poles	Size	Article No.
3-pole	1	3WA9111-0AS31
	2	3WA9111-0AS32
	3	3WA9111-0AS33
4-pole	1	3WA9111-0AS41
	2	3WA9111-0AS42
	3	3WA9111-0AS43

Coding for withdrawable version

Coding for withdrawable version



- Variant coding by the customer with 36 coding options

Size	Article No.
1, 2	3WA9111-0AR11
3	3WA9111-0AR12

Accessories and spare parts

Grounding connection

Grounding connection between the guide frame and the circuit breaker



- Up to 30 kA or 60 kA ground-fault current
- 2 modules must be used for up to 60 kA ground-fault current

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 ¹⁾		3WA9111-0BG01
	3		3WA9111-0BG02
For withdrawable circuit breakers	1	3-pole	3WA9111-0BG11
		4-pole	3WA9111-0BG21
	2	3-pole ¹⁾	3WA9111-0BG12
		4-pole ¹⁾	3WA9111-0BG22
	3	3-pole ²⁾	3WA9111-0BG13
		4-pole ²⁾	3WA9111-0BG23

¹⁾ Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.

²⁾ Not for breaking capacity E

Support bracket

Support bracket



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WA9111-0BB50

Modules of the CubicleBUS²

COM190 PROFINET IO/Modbus TCP communications module ¹⁾



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **CubicleBUS²** terminating resistor

Article No.
3WA9111-0EC13

COM150 communications module Modbus RTU



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **CubicleBUS²** terminating resistor

Article No.
3WA9111-0EC15

IOM230 digital input/output module (2 inputs and 3 outputs)



Version

Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **CubicleBUS²**

- Type of output contact: NO
- Maximum uninterrupted current of an output at 110 ... 230 V AC: 0.2 A

Article No.
3WA9111-0EC11

IOM350 digital input/output module (3 inputs and 5 outputs)



Version

For mounting on DIN rail, including connecting cables and terminating resistor for **CubicleBUS²**

- Type of output contact: CO
- Maximum uninterrupted current of an output at 110 ... 230 V AC: 10 A

Article No.
3WA9111-0EC12

Terminating resistor for CubicleBUS²



Version

For **CubicleBUS²** on the last module


Article No.
3WA9111-0EC50

¹⁾ For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

Modules of the CubicleBUS²

Adapters		
	Version	Article No.
	For mounting the modules of the CubicleBUS ² on the secondary disconnect terminal system of the circuit breaker	3WA9111-0EC60
	For mounting the modules of the CubicleBUS ² on DIN rail	3WA9111-0EC61
ZSI200 Zone-selective interlocking module		
	Version	Article No.
	Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for CubicleBUS ²	3WA9111-0EC10

Internal voltage tap

Set of components for conversion of an existing internal voltage tap on the main conducting paths				
	Conversion	Circuit breaker	Size	Article No.
	From bottom to top	3-pole	1 ¹⁾	3WA9111-0EK11
			2	3WA9111-0EK12
			3	3WA9111-0EK13
		4-pole	1 ¹⁾	3WA9111-0EK21
			2	3WA9111-0EK22
			3	3WA9111-0EK23
	From top to bottom	3-pole	1	3WA9111-0EK31
			2	3WA9111-0EK32
			3	3WA9111-0EK33
		4-pole	1	3WA9111-0EK41
			2	3WA9111-0EK42
3			3WA9111-0EK43	
Retrofit of the internal voltage tap on the lower main conducting paths				
	For breaking capacity	Set for circuit breaker	Size	Article No.
	N, S, M, H, C with VTM680 voltage tap module, with power supply of ETU600	3-pole	1	3WA9111-0EK51
			2	3WA9111-0EK52
			3	3WA9111-0EK53
		4-pole	1	3WA9111-0EK61
			2	3WA9111-0EK62
			3	3WA9111-0EK63
	E with VTM640 voltage tap module	3-pole	1	3WA9111-0EK55
			2	3WA9111-0EK56
			3	3WA9111-0EK57
		4-pole	1	3WA9111-0EK65
			2	3WA9111-0EK66
3			3WA9111-0EK67	

Retrofit kit to connect an external voltage transformer		
	Size	Article No.
	2, 3 including VTM640 voltage tap module and the necessary connection components	3WA9111-0EK81

Voltage tap module			
	Version	For breaking capacity	Article No.
	VTM680, with power supply of ETU600 ²⁾	N, S, M, H, C	3WA9111-0EM12
	VTM640	E	3WA9111-0EM11

¹⁾ For 3WA1 circuit breakers (size 1, fixed-mounted) with front connections at the bottom, modification from voltage tap at the bottom to voltage tap at the top is not permissible.

²⁾ When replacing the VTM680 voltage tap module in an 3WA air circuit breaker with an ID number lower than ID No. OE/230101500000, the internal cable harness of the voltage tap must also be replaced. In this case, the accessory "Retrofit of the internal voltage tap on the lower main conducting paths" is required.

Accessories and spare parts

Main conductor connections, fixed-mounted versions

Front-accessible main connections according to DIN 43673, double hole for main connection at top

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AL11
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AL12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AL21
	S, M, H, E 2500 A AC	3WA9111-0AL22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AL23
3	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL31

Front-accessible main connections according to DIN 43673, double hole for main connection at bottom

Size	Breaking capacity Rated current I_n	Article No.
1 ¹⁾	N, S ≤ 1000 A AC	3WA9111-0AL13
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AL14
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AL24
	S, M, H, E 2500 A AC	3WA9111-0AL25
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AL26
3	4000 A AC (up to a max. short-circuit current of 100 kA)	3WA9111-0AL32

Rear vertical main connections

Size	Breaking capacity Rated current I_n	Article No.
1	N, S, M, E ≤ 2000 A AC ²⁾	3WA9111-0AM11
	N, S, M, E 2500 A AC	3WA9111-0AM12
2	S, M, H, C, E ≤ 3200 A AC ³⁾	3WA9111-0AM21
3	H, C, E ≤ 6300 A AC	3WA9111-0AM33

Rear horizontal connection sets ⁴⁾

Size	Breaking capacity Rated current I_n Number of poles	Article No.
2	S, M, H, E 4000 A, 3-pole	3WA9111-0AX28
	S, M, H, E 4000 A, 4-pole	3WA9111-0AX30
	S, M, H, E 4000 A, 4-pole (Spare part for Z option D04)	3WA9111-0AX32

¹⁾ For 3WA1 circuit breakers (size 1, fixed-mounted) with front connections at the bottom, modification from voltage tap at the bottom to voltage tap at the top is not permissible.

²⁾ In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection, from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.

³⁾ In the case of vertical connection size 2, up to 2500 A one 3WA9111-0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection.

⁴⁾ A set contains top and bottom terminals and is approved only as a spare part for circuit breakers with the following article numbers:
3WL1240-3xxx2-xxxx, 3WL1240-4xxx2-xxxx, 3WL1240-5xxx2-xxxx 3WL1240-8xxx2-xxxx

Main conductor connections for withdrawable units

Front-accessible main connections according to DIN 43673, double hole at top or at bottom ¹⁾

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AN11
	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AN12
2	N, S 1250 ... 2000 A AC; M, E ≤ 2000 A AC	3WA9111-0AN21
	S, M, H, E 2500 A AC	3WA9111-0AN22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AN23
3	H 4000 A AC	3WA9111-0AN31

Supports for front-accessible main connections according to DIN 43673

Number of poles	Size	Article No.
3-pole, set for 3 bars, top or bottom	1	3WA9111-0AN81
	2	3WA9111-0AN82
	3	3WA9111-0AN83
4-pole, set for 4 bars, top or bottom	1	3WA9111-0AN84
	2	3WA9111-0AN85
	3	3WA9111-0AN86

Rear vertical main connections

Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AV11
	N, S 1250 ... 2000 A AC	3WA9111-0AV12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC ²⁾	3WA9111-0AV21
	S, M, H, E 2500 A AC ²⁾	3WA9111-0AV22
	S, M, H, E 3200 A AC; D, E 4000 A DC ²⁾	3WA9111-0AV23
3	H, C, E ≤ 5000 A AC	3WA9111-0AV31

¹⁾ When using front-accessible main connections (withdrawable circuit breakers) supports are required

²⁾ Not for circuit breakers with very high breaking capacity C

Main conductor connections for withdrawable units

Rear horizontal main connections



Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AX11
	N, S 1250 ... 2000 A AC	3WA9111-0AX12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC ¹⁾	3WA9111-0AX21
	S, M, H, E 2500 A AC ¹⁾	3WA9111-0AX22
	S, M, H, E 3200 A AC; D, E 4000 A DC ¹⁾	3WA9111-0AX23
3	H, C, E ≤ 5000 A AC	3WA9111-0AX31

Rear horizontal main connections, set **new**



Number of poles	Size	Breaking capacity Rated current I_n	Article No.
3-pole	2	S, M, H, E 4000 A AC	3WA9111-0AX25

Connecting flange



Size	Breaking capacity Rated current I_n	Article No.
1	N, S ≤ 1000 A AC	3WA9111-0AW11
	N, S 1250 ... 2000 A AC	3WA9111-0AW12
2	S, M, H, E 2000 A AC; D, E ≤ 2000 A DC	3WA9111-0AW21
	S, M, H, E 2500 A AC	3WA9111-0AW22
	S, M, H, E 3200 A AC; D, E 4000 A DC	3WA9111-0AW23
	C 2000 ... 3200 A	3WA9111-0AW24
	H 4000 A AC	3WA9111-0AW31
3	C, E 4000 A AC	3WA9111-0AW32

¹⁾ Not for circuit breakers with very high breaking capacity C

Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers



- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit breakers with breaking capacity C and breaking capacity E

Number of poles	Size	Article No.
3-pole	1	3WA9111-0BC11
	2	3WA9111-0BC12
	3	3WA9111-0BC13
4-pole	1	3WA9111-0BC14
	2	3WA9111-0BC15
	3	3WA9111-0BC16

Accessories and spare parts

Main contact elements

Main contact elements for AC circuit breakers



- Notes:**

- To be ordered only once for each circuit breaker
- On the following circuit breakers, the main contacts can only be replaced at the factory:
3WA1 size 1 breaking capacity M, H and E
3WA1 size 2 breaking capacity C
3WA1 size 3 breaking capacity C and E

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	1	N	≤ 1000 A	3WA9111-0AQ01
			1250 A	3WA9111-0AQ02
			1600 A	3WA9111-0AQ04
		S	≤ 1000 A	3WA9111-0AQ03
			1250 ... 1600 A	3WA9111-0AQ04
			2000 ... 2500 A	3WA9111-0AQ05
	2	S, M, H, E	2000 A	3WA9111-0AQ08
			2500 A	3WA9111-0AQ11
			3200 A	3WA9111-0AQ13
			4000 A	3WA9111-0AQ15
			4000 A	3WA9111-0AQ20
			5000 ... 6300 A	3WA9111-0AQ22
4	1	N	≤ 1000 A	3WA9111-0AQ51
			1250 A	3WA9111-0AQ52
			1600 A	3WA9111-0AQ54
		S	≤ 1000 A	3WA9111-0AQ53
			1250 ... 1600 A	3WA9111-0AQ54
			2000 ... 2500 A	3WA9111-0AQ55
	2	S, M, H, E	2000 A	3WA9111-0AQ58
			2500 A	3WA9111-0AQ61
			3200 A	3WA9111-0AQ63
			4000 A	3WA9111-0AQ65
			4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72
	3	H	4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72

Main contact elements for DC non-automatic circuit breakers



- Note:** To be ordered only once for each circuit breaker

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	2	D, E	1000/2000 A	3WA9111-0AQ17
			4000 A	3WA9111-0AQ18
4	2	D, E	1000/2000 A	3WA9111-0AQ67
			4000 A	3WA9111-0AQ68

Interfaces

Interface to the IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Operational voltage	Article No.
SICAM CP-8021 ¹⁾	–	6MF2802-1AA00
SICAM CP-8031 ²⁾	–	6MF2803-1AA00
SICAM CP-8050 ²⁾	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00



¹⁾ Dimensioned for device quantities of max. 1 × 3WA and 1 × 3VA

²⁾ Dimensioned for device quantities of max. 1 × 3WA and 8 × 3VA


³⁾ Dimensioned for device quantities of max. 3 × 3WA and 8 × 3VA or 2 × 3WA and 8 × 3VA and 1 × PAC4200

You will find further information at:

www.siemens.com/sicam-a8000

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.

The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

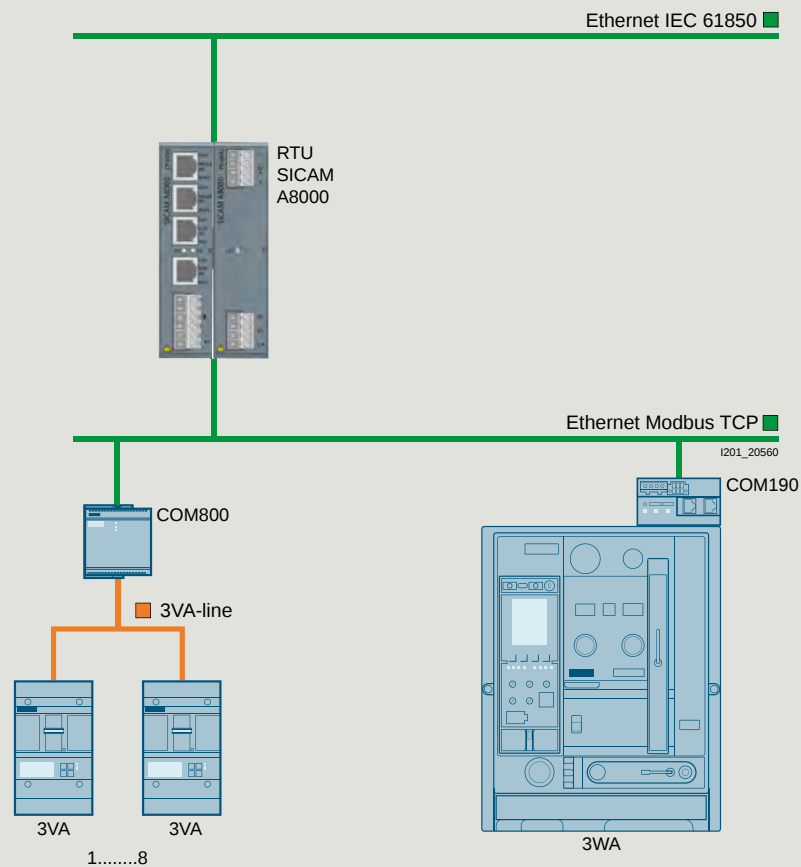



3WL1 circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

AC



3WL10



3WL11

Basic data

Rated operational voltage U_e	V	≤ 690		≤ 1000	
Rated current I_n	A	630 ... 1250		630 ... 2000	
Size		0		1	
Type of mounting		Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles		3/4-pole	3/4-pole	3/4-pole	3/4-pole

Dimensions

Width (3-pole 4-pole)	mm	278 348	210 280	320 410	320 410
Height (standard A05, A15, A16, DC greater than 600 V)	mm	363.5	296	468 518	462
Depth	mm	271	183	471	357

Approvals

General product approvals	VDE, EAC, CCC, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick		
Marine/shipbuilding	RMRS			ABS, DNV, LR, BV, GL, PRS, RMRS		

Breaking capacity

		B	N	S	N	S	H
Rated short-circuit breaking capacity							
Rated operational voltage U_e up to 415 V AC $I_{cu} I_{cs}$	kA	42 42	55 50	66 50	55 55	66 66	85 85
Rated operational voltage U_e up to 500 V AC $I_{cu} I_{cs}$	kA	42 42	50 50	50 50	55 55	66 66	85 85
Rated operational voltage U_e up to 690 V AC $I_{cu} I_{cs}$	kA	— —	42 42	50 50	42 42	50 50	66 66 ⁶⁾
Rated operational voltage U_e up to 690 V AC +20% ⁶⁾ , with Z option: A16 $I_{cu} I_{cs}$	kA	— —	— —	— —	— —	— —	50 50
Rated operational voltage U_e up to 1000 V AC, with Z option: A05 $I_{cu} I_{cs}$	kA	— —	— —	— —	— —	— —	50 50
Rated operational voltage U_e up to 1150 V AC, with Z option: A15 $I_{cu} I_{cs}$	kA	— —	— —	— —	— —	— —	— —

Rated short-time withstand current I_{cw} ⁵⁾

Rated short-time withstand current I_{cw} at U_e up to 500 V AC	0.5 s	kA	—	—	—	55	66	85
	1 s	kA	42	42	50	50	66	85
	2 s	kA	—	—	—	35 ^{1)/45²⁾}	45	70
	3 s	kA	24	24	36	35 ^{1)/45²⁾}	35	60
Rated short-time withstand current I_{cw} at U_e up to 690 V AC	0.5 s	kA	—	—	—	42	50	66 ⁷⁾
	1 s	kA	42	42	50	42	50	66 ⁷⁾
	2 s	kA	—	—	—	35 ^{1)/42²⁾}	45	66 ⁸⁾
	3 s	kA	24	24	36	30 ^{1)/45²⁾}	35	60
Rated short-time withstand current I_{cw} at DC	1 s	kA	—	—	—	—	—	—

Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers

Up to 500 V AC	kA	—	42	50	55	66	85
Up to 690 V AC	kA	—	42	50	42	50	66
Up to 1000 V/1150 V AC, with Z option: A05, A16	kA	—	—	—	—	—	50
Up to 1000 V/1150 V AC, with Z option: A15	kA	—	—	—	—	—	—
Up to 220 V DC	kA	—	—	—	—	—	—
Up to 300 V DC	kA	—	—	—	—	—	—
Up to 600 V DC	kA	—	—	—	—	—	—
Up to 1000 V DC	kA	—	—	—	—	—	—

Rated short-circuit making capacity I_{cm}

I_{cm} at 415 V AC	kA	88	121	145	121	145	187
I_{cm} at 500 V AC	kA	88	105	105	121	145	187
I_{cm} at 690 V AC	kA	—	88	105	88	105	145
I_{cm} at 1000 V AC	kA	—	—	—	—	—	105
I_{cm} at 1150 V AC	kA	—	—	—	—	—	—

¹⁾ Size 1 with $I_{n \max} \leq 1250$ A
²⁾ Size 1 with $I_{n \max} \geq 1600$ A

³⁾ Size 2 with $I_{n \max} \leq 2500$ A
⁴⁾ Size 2 with $I_{n \max} \geq 3200$ A

⁵⁾ At rated operational voltage $U_e > 690$ V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs} value
⁶⁾ For breakers with Z options A05 and A16 $I_{cu} = I_{cs} = 85$ kA
⁷⁾ For breakers with Z options A05 and A16 $I_{cw} = 85$ kA
⁸⁾ For breakers with Z options A05 and A16 $I_{cw} = 70$ kA



AC

DC

**3WL12****3WL13****3WL11****3WL12**

≤ 1150				≤ 1150			1000 DC	≤ 600/1000 DC	
800 ... 4000				4000 ... 6300			2000	1000 ... 4000	
2				3			1	2	
Withdrawable		Fixed-mounted		Withdrawable	Fixed-mounted		Fixed-mounted	Withdrawable	Fixed-mounted
3/4-pole		3/4-pole		3/4-pole	3/4-pole		4-pole	3/4-pole	3/4-pole
460 590		460 590		704 914	704 914		410	460 590	460 590
468 518		462		468 518	462		462	468 518	462
471		357		471	357		357	471	357
VDE, EAC, CCC, CE, C-Tick				VDE, EAC, CCC, VDE, CE, C-Tick			VDE, EAC, CCC, CE, C-Tick	VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LR, BV, GL, PRS, RMRS				ABS, DNV, LR, BV, GL, PRS, RMRS			ABS, DNV, LR, BV, GL, PRS, RMRS	ABS, DNV, LR, BV, GL, PRS, RMRS	
N	S	H	C ⁹⁾	H	C 3p	C 4p	DC	DC	
66 66	85 85	100 100	130 130	100 100	150 150	130 130	–	–	
66 66	85 85	100 100	130 130	100 100	150 150	130 130	–	–	
50 50	75 75	85 85	100 100	85 85	150 150	130 130	–	–	
– –	– –	– –	– –	– –	– –	– –	–	–	
– –	– –	85 85	– –	85 85	125 125	125 125	–	–	
– –	– –	50 50	– –	70 70	– –	– –	–	–	
66	85	100	100	100	130	120	–	–	
66	85	85	100	100	130	120	–	–	
66	66 ^{3)/85⁴⁾}	66 ^{3)/85⁴⁾}	85	100	130	120	–	–	
55 ^{3)/66⁴⁾}	55 ^{3)/75⁴⁾}	55 ^{3)/75⁴⁾}	75	100	130	120	–	–	
50	75	85	100	85	130	120	–	–	
50	75	85	100	85	130	120	–	–	
50	66 ^{3)/75⁴⁾}	66 ^{3)/85⁴⁾}	85	85	130	120	–	–	
50	55 ^{3)/75⁴⁾}	55 ^{3)/75⁴⁾}	75	85	130	120	–	–	
–	–	–	–	–	–	–	20	35 ^{10)/30^{11)/25^{12)/20¹³⁾}}}	
66	85	100	130	100	130	120	–	–	
50	75	85	100	85	130	120	–	–	
–	–	85/85	–	85/85	–	–	–	–	
–	–	–/50	–	70/70	–	–	–	–	
–	–	–	–	–	–	–	20	35	
–	–	–	–	–	–	–	20	30	
–	–	–	–	–	–	–	20	25	
–	–	–	–	–	–	–	20	20	
145	187	220	286	220	330	286	–	–	
145	187	220	286	220	330	286	–	–	
105	165	187	220	187	330	286	–	–	
–	–	105	–	187	267	267	–	–	
–	–	105	–	147	–	–	–	–	

⁹⁾ Up to 3200 A¹⁰⁾ At $U_e = 220$ V DC¹¹⁾ At $U_e = 300$ V DC¹²⁾ At $U_e = 600$ V DC¹³⁾ At $U_e = 1000$ V DC

3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2



3WL10



3WL11



Rated current I_n

	630 A	800 A	1000 A	1250 A	1000 A	1250 A
--	-------	-------	--------	--------	--------	--------

General data

Isolating function acc. to IEC 60947-2			Yes				Yes	
Utilization category			B				B	
Permissible ambient temperature	During operation	°C	-25 ... +70				-40 ... +70	
	(in operation with LCD max. 55 °C) ¹⁾							
Storage		°C	-40 ... +70				-40 ... +80	
Mounting position								
Degree of protection			IP20 without cabinet door, IP30 with door sealing frame, IP54 with cover				IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	

Voltage

Rated operational voltage U_e at 50/60 Hz	1000 V version	V AC	≤ 690				690/1000	
Rated insulation voltage U_i		V AC	1000				1000	
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12				12	
	Auxiliary circuits	kV	4				4	
	Control circuits ⁸⁾	kV	2.5				2.5	
Rated rotor operational voltage U_{er}		V					2000	

Permissible load for withdrawable versions ^{2) 4) 9)}

At rear horizontal main connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 70 °C	A	630	800	1000	1250	1000 ⁷⁾	1210 ⁷⁾

Power loss at I_n

With 3-phase symmetrical load, complete device (3/4p)	Fixed-mounted circuit breaker	W	31	50	78	122	100	105
	Withdrawable circuit breaker	W	62	100	156	244	195	205

Service life/endurance

Breaking capacity N and S, 3/4-pole

Mechanical	Without maintenance	Operating cycles	20000 ³⁾	20000 ³⁾	20000 ³⁾	20000 ³⁾	15000	15000
	With maintenance ⁵⁾	Operating cycles	—	—	—	—	25000	25000
Electrical	Without maintenance 440 V	Operating cycles	8000 ^{3) 6)}	8000 ^{3) 6)}	8000 ^{3) 6)}	8000 ^{3) 6)}	—	—
	Without maintenance 690 V	Operating cycles	8000 ^{3) 6)}	8000 ^{3) 6)}	8000 ^{3) 6)}	6500 ^{3) 6)}	10000	10000
	With maintenance ⁵⁾	Operating cycles	—	—	—	—	25000	25000

Breaking capacity H, 3-pole

Mechanical	Without maintenance	Operating cycles	—	—	—	—	10000	10000
	With maintenance ⁵⁾	Operating cycles	—	—	—	—	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	—	—	—	—	7500	7500
	Without maintenance 1000 V, with Z option: A05	Operating cycles	—	—	—	—	1000	1000
	Without maintenance 1150 V, with Z option: A15	Operating cycles	—	—	—	—	—	—
	With maintenance ⁵⁾	Operating cycles	—	—	—	—	15000	15000

¹⁾ The LCD on the 3WL10 is always active.

²⁾ 4000 A, size 2 in fixed-mounted version, 3-pole

³⁾ 2000 in conjunction with mechanical interlock

⁴⁾ ETU76B with graphics display can be used up to max. 55 °C.

⁵⁾ Maintenance means: Replacing main contacts and arc chutes (see operating instructions). Greasing the breaker mechanism on the 3WL10, no spare part of components.



3WL11



3WL12



3WL13



1600 A	2000 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	4000 A	5000 A	6300 A
--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

1

Yes					Yes					Yes		
B					B					B		
-40 ... +70					-40 ... +70					-40 ... +70		
-40 ... +80					-40 ... +80					-40 ... +80		
IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover					IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover					IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		
690/1000					690/1000/1150					690/1000/1150		
1000					≤ 1150					≤ 1150		
12					12					12		
4					4					4		
2.5					2.5					2.5		
2000					2000					2000		
1600	2000	800	1000	1250	1600	2000	2500	3200	3950	4000	5000	5920
1600	1930	800	1000	1250	1600	2000	2500	3020	3810	4000	5000	5810
1490 ⁷⁾	1780 ⁷⁾	800 ⁷⁾	1000 ⁷⁾	1250 ⁷⁾	1600 ⁷⁾	2000 ⁷⁾	2280 ⁷⁾	2870 ⁷⁾	3600 ⁷⁾	4000 ⁷⁾	5000 ⁷⁾	5500 ⁷⁾
150	240	40	45	80	85	180	270	410	750	520	630	900
350	440	85	95	165	175	320	520	710	925	810	1050	1600
15000	15000	10000	10000	10000	10000	10000	10000	10000	10000	–	–	–
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–
10000	7500	7500	7500	7500	7500	7500	7500	4000	2000 ³⁾	–	–	–
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000

⁶⁾ Periodic greasing of breaker mechanism on the 3WL10 (see Manual), no spare part of components

⁷⁾ Cu painted black

⁸⁾ Motorized operating mechanisms $U_{imp} = 1.2 \text{ kV}$

⁹⁾ For 3WL size 2 4000 A and size 3 6300 A with rear vertical main connections.

3WL1 circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)



3WL10



3WL11

**Rated current I_n**

630 A

800 A

1000 A

1250 A

1000 A

1250 A

Service life/endurance**Breaking capacity H, 4-pole**

Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance ¹⁾	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V ²⁾	Operating cycles	–	–	–	–	–	–
	With maintenance ¹⁾	Operating cycles	–	–	–	–	10000	10000

Breaking capacity C

Mechanical	Without maintenance	Operating cycles	–	–	–	–	–	–
	With maintenance ¹⁾	Operating cycles	–	–	–	–	–	–
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	–	–
	With maintenance 690 V ¹⁾	Operating cycles	–	–	–	–	–	–

Connection**Minimum main conductor cross-sections**

Copper bars, bare	Unit × mm × mm	2 × 40 × 5	2 × 50 × 5	2 × 50 × 10 ³⁾ 2 × 50 × 8 ⁴⁾	2 × 50 × 10 ³⁾ 2 × 50 × 8 ³⁾	1 × 60 × 10	2 × 40 × 10
Copper bars, painted black	Unit × mm × mm	–	–	–	–	1 × 60 × 10	2 × 40 × 10

Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)

Standard connection = screw	Without end sleeve	–	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)
	With end sleeve acc. to DIN 46228 Part 2	–	1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)
	With twin end sleeve	–	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)
Screwless connection technology	Without end sleeve	0.5 ... 2.5 mm ² (AWG 20 ... 14)	2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)
	With end sleeve acc. to DIN 46228 Part 2	0.5 ... 1.5 mm ² (AWG 20 ... 16)	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)

Position signaling switch

Screwless connection technology	1 × 0.5 ... 1 × 2.5 mm ² (AWG 20 ... 14)	1 × 0.5 ... 1 × 2.5 mm ² (AWG 20 ... 14)
---------------------------------	--	--

Weights

3-pole	Fixed-mounted circuit breaker	kg	14	43	43
	Withdrawable circuit breaker (without guide frames)	kg	17.3	45	45
	Guide frames	kg	21	25	25
4-pole	Fixed-mounted circuit breaker	kg	16	50	50
	Withdrawable circuit breaker (without guide frames)	kg	19.3	54	54
	Guide frames	kg	25	30	30

¹⁾ Maintenance means: Replacing main contacts and arc chutes (see operating instructions).

²⁾ Size 2 with order code "A15" and size 3. Data for very high breaking capacity.

³⁾ Horizontal

⁴⁾ Vertical



3WL11



3WL12



3WL13



1

1600 A	2000 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	4000 A	5000 A	6300 A
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
10000	10000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	5000	–	5000	5000	5000
–	–	10000	10000	10000	10000	10000	10000	10000	–	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	4000	–	1000	1000	1000
–	–	10000	10000	10000	10000	10000	10000	8000	–	–	–	–
2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	2 × 100 × 10	3 × 100 × 10	4 × 100 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)		
1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)					1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)					1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)		
2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)		
2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)					2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)		
2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)					2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)		
1 × 0.5 ... 1 × 2.5 mm ² (AWG 20 ... 14)					1 × 0.5 ... 1 × 2.5 mm ² (AWG 20 ... 14)					1 × 0.5 ... 1 × 2.5 mm ² (AWG 20 ... 14)		
43	43	56	56	56	56	56	59	64	85	82	82	90
45	45	60	60	60	60	60	63	68	121	88	88	96
25	25	31	31	31	31	31	39	45	52	60	60	70
50	50	67	67	67	67	67	71	77	103	99	99	108
54	54	72	72	72	72	72	76	82	146	106	106	108
30	30	37	37	37	37	37	47	54	62	84	84	119

3WL1 non-automatic circuit breakers for DC

IEC 60947-2



3WL11

3WL12



2000 A

1000 A

2000 A

4000 A

Rated current I_n

General data

Size			1	2
Isolating function acc. to IEC 60947-2			Yes	Yes
Utilization category			B	B
Permissible ambient temperature	Operation	°C	-40 ... +70	-40 ... +70
	Storage	°C	-40 ... +80	-40 ... +80
Mounting position				
Degree of protection			IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover

Voltage

Rated operational voltage U_e at 50/60 Hz	1000 V version	V DC	1000	600/1000
Rated insulation voltage U_i		V DC	1000	1000
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12	12
	Auxiliary circuits	kV	4	4
	Control circuits	kV	2.5	2.5

Permissible load

At rear horizontal main connections	Up to 40 °C (Cu black painted)	A	2000	1000	2000	4000
	Up to 55 °C (Cu black painted)	A	1910	1000	2000	3640
	Up to 60 °C (Cu black painted)	A	1850	1000	2000	3500
	Up to 70 °C (Cu black painted)	A	1710	1000	1950	3250

Power loss at I_n

With symmetrical load	Withdrawable circuit breaker	W	150	280	770	1640
-----------------------	------------------------------	---	-----	-----	-----	------

Service life/endurance ¹⁾

Mechanical	Without maintenance	Operating cycles	10000	10000	10000	10000
	With maintenance ²⁾	Operating cycles	15000	17500	17500	17500
Electrical	Without maintenance	Operating cycles	1000	6000	6000	4000
	Without maintenance 1000 V	Operating cycles	1000	1000	1000	1000
	With maintenance ²⁾	Operating cycles	2000	17500	17500	17500

¹⁾ Further technical specifications on request.²⁾ Maintenance means: Replacing main contacts and arc chutes (see operating instructions).



3WL11

3WL12



2000 A

1000 A

2000 A

4000 A

Rated current I_n **Short-circuit breaking capacity I_{cc}**

Up to 220 V DC	kA	20	35
Up to 300 V DC	kA	20	30
Up to 600 V DC	kA	20	25
Up to 1000 V DC	kA	20	20

Rated short-time withstand current I_{cw}

0.5 s	kA	–	–
1 s	kA	20	35 ¹⁾ /30 ²⁾ /25 ³⁾ /20 ⁴⁾
2 s	kA	–	–
3 s	kA	–	–

Connection**Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)**

Standard connection = strain-relief clamp	Without end sleeve	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16); 1 × 2.5 mm ² (AWG 14)
	With end sleeve acc. to DIN 46228 Part 2	1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)	1 × 0.5 ... 1 × 1.5 mm ² (AWG 20 ... 16)
	With twin end sleeve	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)
Optional connection = tension spring	Without end sleeve	2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)	2 × 0.5 ... 2 × 2.5 mm ² (AWG 20 ... 14)
	With end sleeve acc. to DIN 46228 Part 2	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)	2 × 0.5 ... 2 × 1.5 mm ² (AWG 20 ... 16)

Weights

3-pole	Fixed-mounted circuit breaker	kg	43	56	56	64
	Withdrawable circuit breaker	kg	–	60	60	68
	Guide frames	kg	–	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	50	67	67	77
	Withdrawable circuit breaker	kg	–	72	72	82
	Guide frames	kg	–	37	37	54

¹⁾ At $U_e = 220$ V DC²⁾ At $U_e = 300$ V DC³⁾ At $U_e = 600$ V DC⁴⁾ At $U_e = 1000$ V DC







3WL1 non-automatic circuit breakers for DC



Application examples

1

The connection to the non-automatic circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connection bars, for thermal reasons the continuous load on the non-automatic circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connection bars, the non-automatic circuit breaker can be used at full operational current load.

Required contact gaps at rated voltage ¹⁾	Size 2 For 3-pole non-automatic circuit breakers		Size 1 and Size 2 For 4-pole non-automatic circuit breakers	
	1-pole	2-pole	1-pole	2-pole
Rated operational voltage up to 300 V				
				
		Grounded system ²⁾	Grounded system ³⁾	
Rated operational voltage up to 600 V				
				
		Grounded system	Grounded system ²⁾	
Rated operational voltage up to 1000 V ⁴⁾				
				
		Grounded system	Grounded system	Grounded system
Size 1 For 4-pole non-automatic circuit breakers 2-pole				
+ (-) - (+) Last 				

¹⁾ Contact gaps connected in series

²⁾ 2 conducting paths in parallel

³⁾ 3 conducting paths in parallel

⁴⁾ Version for 1000 V required, order with "-Z" and order code A05


Grounded system

Load

ETU electronic trip units

With watchdog monitoring

3WL10



			ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Basic protective functions					
L Overload protection (L tripping)	Setting range of operating value $I_r = I_n \times \dots$		0.4 0.5 0.6 0.7 0.75 0.8 0.85 0.9 0.95 1 Default 0.4	0.4 0.5 0.6 0.7 0.75 0.8 0.85 0.9 0.95 1 Default 0.4	0.4 0.5 0.6 0.7 0.75 0.8 0.85 0.9 0.95 1 Default 0.4
	Switchable overload protection (from I^2t - to I^4t -dependent function)		–	–	–
	Setting range of the delay t_r at I^2t (Reference point $6 \times I_n$)		0.75 1 2 5 8 10 14 17 21 25 s Default 0.75 s	0.75 1 2 5 8 10 14 17 21 25 s Default 0.75 s	0.75 1 2 5 8 10 14 17 21 25 s Default 0.75 s
	Setting range of the delay t_r at I^4t (Reference point $6 \times I_n$)		–	–	–
	Thermal memory can be switched on/off		Permanently switched on	Permanently switched on	Permanently switched on
	Phase failure sensitivity/asymmetry		–	–	–
S Short-time-delayed short-circuit protection (ST tripping)	Setting range of operating value $I_{sd} = I_n \times \dots$		–	1 1.5 2 2.5 3 4 6 8 10 Default OFF	1 1.5 2 2.5 3 4 6 8 10 Default OFF
	Setting range of the delay time t_{sd} at I^2t		–	0.1 0.2 0.3 0.4 0.5 (Ref. $10 \times I_n$)	0.1 0.2 0.3 0.4 0.5 (Ref. $10 \times I_n$)
	Setting range of the delay time t_{sd} ($t = \text{const.}$)		–	0.08 0.15 0.22 0.3 0.4 s	0.08 0.15 0.22 0.3 0.4 s
	ZSI function		–	–	–
I Instantaneous short-circuit protection (INST tripping)	Setting range $I_l = I_n \times \dots$		OFF 1.5 2 3 4 6 8 10 12 15	OFF 1.5 2 3 4 6 8 10 12 15	OFF 1.5 2 3 4 6 8 10 12 15
N Neutral conductor protection	N conductor setting range $I_N = I_n \times \dots$		OFF 50% 100% 200%	OFF 50% 100% 200%	OFF 50% 100% 200%
G Ground-fault tripping (GF tripping) Detection of ground-fault current through summation current formation with internal or external neutral conductor transformer	Tripping function can be switched on/off		–	–	■
	Alarm function can be switched on/off		–	–	Permanently switched on
	Detection of ground-fault current through external current transformer		–	–	–
	Setting range of the operating current $I_g = I_n \times \dots$		–	–	0.1 0.2 0.3 0.4 0.5 0.6 0.7 0.8 1
	Setting range of the operating current I_g for alarm		–	–	–
	Setting range of the delay time t_g		–	–	0.1 0.2 0.4 0.6 0.8 s (fixed delay)
	Switchable ground-fault protection characteristic (I^2t -dependent function)		–	–	$t = \text{const.}/I^2t$ Default I^2t
	Setting range of the delay time t_g at I^2t		–	–	0.1 0.2 0.4 0.6 0.8 s (Ref. $2 \times I_n$) (I^2t dependent) Default 0.1 (I^2t)
	ZSI-G function		–	–	–

¹⁾ Sizes 1 and 2/size 3

■ Available

– Not available/not present



3WL10



3WL11 – 3WL13




1

ETU650 (LSI)	ETU660 (LSIG)	ETU15B (LI)	ETU25B (LSI)	ETU27B (LSIG)	ETU45B (LSIG)	ETU76B (LSIG)
0.4 ... 1 Default 1 (in steps of 0.001)	0.4 ... 1 Default 1 (in steps of 0.001)	0.5 0.55 0.6 0.65 0.7 0.75 0.8 0.85 0.9 1	0.4 0.45 0.5 0.55 0.6 0.65 0.7 0.8 0.9 1	0.4 0.45 0.5 0.55 0.6 0.65 0.7 0.8 0.9 1	0.4 0.45 0.5 0.55 0.6 0.65 0.7 0.8 0.9 1	0.4 ... 1
■	■	–	–	–	■	■
0.75 ... 36 s (in steps of 0.25 s) Default 36 s	0.75 ... 36 s (in steps of 0.25 s) Default 36 s	10 s fixed	10 s fixed	10 s fixed	2 3.5 5.5 8 10 14 17 21 25 30 s	2 ... 30 s
0.75 ... 5 s (in steps of 0.25 s) Default 5 s	0.75 ... 5 s (in steps of 0.25 s) Default 5 s	–	–	–	1 2 3 4 5 s	1 ... 5 s
■	■	–	–	–	■	■
2% ... 90% (default 50%)	2% ... 90% (default 50%)	–	At $t_{sd} = 20$ ms (M)	At $t_{sd} = 20$ ms (M)	At $t_{sd} = 20$ ms (M)	■ (on/off)
0.6 ... 10 OFF (in steps of 0.1)	0.6 ... 10 OFF (in steps of 0.1)	–	1.25 1.5 2 2.5 3 4 6 8 10 12	1.25 1.5 2 2.5 3 4 6 8 10 12	1.25 1.5 2 2.5 3 4 6 8 10 12 OFF	$1.25 \times I_n \dots 0.8 \times I_{cw}$ OFF
0.05 ... 0.5 s (Ref. $10 \times I_n$)	0.05 ... 0.5 s (Ref. $10 \times I_n$)	–	–	–	100 200 300 400 ms	100 ... 400 ms
0.05 ... 0.4 s	0.05 ... 0.4 s	–	M (0.02 ms) 100 200 300 400 ms	M (0.02 ms) 100 200 300 400 ms	M (0.02 ms) 100 200 300 400 ms	M (0.02 ms) 80 ... 4000 ms
–	–	–	–	–	Via module of the CubicleBUS	Via module of the CubicleBUS
OFF 1.5 ... 15 (in steps of 0.1)	OFF 1.5 ... 15 (in steps of 0.1)	2 3 4 5 6 7 8	Fixed at $I_l \geq 20 \times I_{nr}$ max. 50 kA	Fixed at $I_l \geq 20 \times I_{nr}$ max. 50 kA	OFF 1.5 2.2 3 4 6 8 10 12 $0.8 \times I_{cs}$	OFF $1.5 \times I_n \dots 0.8 \times I_{cs}$
OFF 50% 100% 150% 200%	OFF 50% 100% 200%	–	–	100%	OFF 50% 100%	OFF 20% ... 200%
–	■	–	–	■	■	■
–	■	–	–	–	–	■
–	Alternative Rc or G-ret ground-fault monitoring	–	–	–	■	■
–	0.1 ... 1 (in steps of 0.001) $I_g = I_n \times \dots$	–	–	A ¹⁾ (100/400 A) B ¹⁾ (300/600 A); C ¹⁾ (600/800 A) D ¹⁾ (900/ 1000 A); E ¹⁾ (1200/1200 A)	A ¹⁾ (100/400 A) B ¹⁾ (300/600 A); C ¹⁾ (600/800 A) D ¹⁾ (900/ 1000 A); E ¹⁾ (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	50% ... 90% $\times I_r$ (in steps of 1%) PreAlarm	–	–	–	A ¹⁾ (100/400 A); B ¹⁾ (300/600 A); C ¹⁾ (600/800 A); D ¹⁾ (900/ 1000 A); E ¹⁾ (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	0.1 ... 1 s Default 0.1 s (in steps of 0.05 s)	–	–	100 200 300 400 500 ms	100 200 300 400 500 ms	100 ... 500 ms
–	$t = \text{const.} / I^2 t$ Default const.	–	–	–	■	■
–	0.1 ... 1 s (in steps of 0.05 s) (Ref. $2 \times I_n$)	–	–	–	100 200 300 400 500 ms	100 ... 500 ms
–	–	–	–	–	Via module of the CubicleBUS	Via module of the CubicleBUS

ETU electronic trip units

With watchdog monitoring (continued)

3WL10



		ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Parameter set changeover	Switchable between parameter set A and B	–	–	–
LCD		–	–	–
Voltage tap on top/bottom		–	–	–
Metering function		–	–	–
Tripping as a result of enhanced protective function: (including: phase asymmetry current/voltage, harmonic distortion current/voltage, under/overvoltage, phase rotation direction, active power in/opposite to normal direction, under/over-frequency, protective functions dependent on direction of power flow)		–	–	–
Mode of communication				
Communication PROFIBUS PROFINET Modbus RTU Modbus TCP		–	–	–
Output modules				
Signals via relay: Overload warning, load shedding/load carrying, leading signal, overload tripping 200 ms, temperature alarm, phase asymmetry, instantaneous short-circuit release, short-time-delayed short-circuit release, overload trip, neutral conductor trip, auxiliary relay, ETU faults, ground-fault protection tripping and ground-fault alarm (only with ground-fault protection module)		IOM300	IOM300	IOM300

■ Available

– Not available/not present

Increment size when settings are made for the ETU76B using the menu

From ... to	Increment size
0 ... 1	0.1
1 ... 100	1
100 ... 500	5
500 ... 1000	10
1000 ... 1600	50
1600 ... 10000	100
10000 ... max.	1000



3WL10



3WL11 – 3WL13



1

ETU650 (LSI)	ETU660 (LSIG)	ETU15B (LI)	ETU25B (LSI)	ETU27B (LSIG)	ETU45B (LSIG)	ETU76B (LSIG)
■	■	–	–	–	–	■
Integrated	Integrated	–	–	–	Optional	Integrated
Optional	Optional	–	–	–	Optional	Optional
Basic/Advanced	Basic/Advanced	–	–	–	Metering function Plus	Metering function Plus
■	■	–	–	–	■	■
■	■	–	–	–	■	■
IOM040/IOM300	IOM040/IOM300	–	–	–	■	■

Connection

Main circuit connection



3WL10

3WL11 – 3WL13

Connection	Fixed-mounted	Withdrawable	Fixed-mounted	Withdrawable
Front-mounted	 Direct	 Extended	 1-hole	 2-hole
	 Extended		 1-hole	 2-hole
	 Broadened			
Rear-mounted	 Vertical	 Vertical	 Vertical	 Vertical
	 Horizontal	 Horizontal	 Horizontal	 Horizontal
		 Broadened		
Cable	 Cable terminals	 Cable lug		

Auxiliary circuit connections

3WL10: Withdrawable/fixed-mounted version

- Direct engagement of the auxiliary conductor vertically onto the circuit breaker or horizontally in the guide frame



Screwless connection technology
(push in)


3WL11 – 3WL13: Withdrawable version

- Connection of the internal auxiliary switches to the male connector on the switch side
- When fully inserted, connection with the sliding contact module in the guide frame


3WL11 – 3WL13: Fixed-mounted version

- Engagement of the auxiliary supply connectors directly onto the circuit breaker

Coding pins on the connectors prevent them being inserted in the wrong slots



Screw connection (standard)



Screwless connection
(tension spring) (optional)

Operating mechanism, auxiliary release, auxiliary switch



Operating mechanism

The circuit breakers are available with various optional operating mechanisms:

- Manual operating mechanism with mechanical closing (standard design)
- Manual operating mechanism with mechanical and electrical closing
- Motorized operating mechanism with mechanical and electrical closing

The operating mechanisms with electrical closing are suitable for synchronization tasks.

Available for air circuit breakers	3WL10	3WL11 – 3WL13
Closing coils (CC)	■	■
Undervoltage releases (UVR)/ shunt trips (ST)	■	■
Shunt trips (ST)	■	■
Remote trip alarm reset coils (RR)	■	■
Spring charging motors/ Motorized operating mechanisms (MO)	■	■
Mechanical operating cycles counters	■	■

Structure of the article numbers



Basic configuration for AC circuit breakers

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

3WL1		5	6	7	8	9	10	11	12	13	14	15	16
Circuit breakers, non-automatic circuit breakers and ETU													
Size (SZ)	1	1											
	2	2											
	3	3											
		SZ 1	SZ 2	SZ 3									
Max. rated current	630 A	■	–	–		0	6						
$I_{n\ max}$	800 A	■	■ ⁶⁾	–		0	8						
	1000 A	■	■ ⁶⁾	–		1	0						
	1250 A	■	■ ⁶⁾	–		1	2						
	1600 A	■	■	–		1	6						
	2000 A	■	■	–		2	0						
	2500 A	–	■	–		2	5						
	3200 A	–	■	–		3	2						
	4000 A	–	■ ⁶⁾	■		4	0						
	5000 A	–	–	■		5	0						
	6300 A	–	–	■		6	3						
Short-circuit breaking capacity	N ECO	■	–	–	55 kA			2					
I_{cu} at 500 V		–	■	–	66 kA			2					
	S Standard	■	–	–	66 kA			3					
		–	■	–	85 kA			3					
	H High	■	–	–	85 kA			4					
		–	■	■	100 kA			4					
	C Very high	–	■	■ ⁸⁾	130 kA			5					
		–	–	■ ⁹⁾	150 kA			5					
Trip units	Without trip unit					A	A						
	With trip unit, without ground-fault tripping	ETU15B ⁷⁾			LI	B	B						
		ETU25B			LSI	C	B						
		ETU45B (without display)			LSIN	E	B						
		ETU45B (with display)			LSIN	F	B						
		ETU76B			LSIN	N	B						
	With trip unit, with ground-fault tripping	ETU27B (without display)			LSING	D	G						
		ETU45B (without display)			LSING	E	G						
		ETU45B (with display)			LSING	F	G						
		ETU76B			LSING	N	G						
Number of poles	3-pole (3WL upgrade)							6					
	4-pole (3WL upgrade)							7					
Connection		SZ 1	SZ 2	SZ 3									
Type of mounting	Fixed-mounted	■	■	■	Vertical			1					
		■	■ ²⁾	■ ³⁾	Horizontal			2					
		■ ⁴⁾	■ ¹⁾	■ ⁵⁾	Front single hole			3					
		■	■ ¹⁾	■ ⁵⁾	Front double hole			4					
	Withdrawable	■	■	■	Without guide frame			5					
		■	■ ²⁾	■ ³⁾	Horizontal			6					
		■	■	■	Vertical			7					
		■	■ ¹⁾	■ ⁵⁾	Flanges			8					

¹⁾ Not available for 4000 A and for breaking capacity C

²⁾ Not available for 4000 A

³⁾ Not available for 6300 A

⁴⁾ Not available for 2000 A and for breaking capacity H

⁵⁾ Not available for 5000 A, 6300 A and for breaking capacity C

⁶⁾ Not available for breaking capacity C

⁷⁾ Not available for size 3

⁸⁾ Not available for 3-pole

⁹⁾ Not available for 4-pole



1

3WL1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanism	With mechanical operation		1											
		With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2											
			230 V AC 50/60 Hz/220 V DC	3											
	Motorized recharging	With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4											
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5											
			24 V DC	6											
1st auxiliary release	Without 1st auxiliary release								A						
	With shunt trip (ST) 100% OP	24 V DC							B						
		30 V DC							C						
		48 V DC							D						
		60 V DC							E						
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC							F						
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC							G						
2nd auxiliary release	Without 2nd auxiliary release									A					
	With shunt trip (ST) 100% OP	24 V DC								B					
		30 V DC								C					
		48 V DC								D					
		60 V DC								E					
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								F					
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								G					
	With undervoltage release (UVR), instantaneous	24 V DC								J					
		30 V DC								K					
		48 V DC								L					
		60 V DC								U					
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								M					
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								N					
		380 ... 415 V AC 50/60 Hz								P					
										Q					
	With undervoltage release (UVR-t) ¹⁾ , delay 0.2 ... 3.2 s	48 V DC								R					
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								S					
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								T					
		380 ... 415 V AC 50/60 Hz													

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

¹⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Structure of the article numbers



Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

3WL1		5	6	7	8	9	10	11	12	13	14	15	16
Non-automatic circuit breakers and ETU													
Size (SZ)	1	1											
	2	2											
		SZ 1	SZ 2										
Max. rated current I_n	1000 A	–	■		1	0							
	2000 A	■	■		2	0							
	4000 A	–	■		4	0							
Short-circuit breaking capacity I_{cc}	1000 V DC 20 kA	■	–			8							
	600 V DC 25 kA	–	■			8							
Non-automatic circuit breakers	Without trip unit						A	A					
Number of poles	3-pole (3WL upgrade)	–	■						6				
	4-pole (3WL upgrade)	■	■						7				
Connection		SZ 1	SZ 2										
Type of mounting	Fixed-mounted	■	■	Vertical					1				
		■	■	Horizontal					2				
		–	■ ¹⁾	Front single hole					3				
		–	■ ¹⁾	Front double hole					4				
	Withdrawable	–	■	Without guide frame					5				
		–	■	Horizontal					6				
		–	■	Vertical					7				
		–	■	Flanges					8				

¹⁾ Not available for 4000 A



1

3WL1

5	6	7	8	9	10	11	12	13	14	15	16
				–				–			

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanism	With mechanical operation		1									
		With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2									
			230 V AC 50/60 Hz/220 V DC	3									
	Motorized recharging	With mechanical and electrical operation, closing coil (CC) suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4									
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5									
			24 V DC	6									
1st auxiliary release	Without 1st auxiliary release								A				
	With shunt trip (ST) 100% OP	24 V DC							B				
		30 V DC							C				
		48 V DC							D				
		60 V DC							E				
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC							F				
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC							G				
2nd auxiliary release	Without 2nd auxiliary release									A			
	With shunt trip (ST) 100% OP	24 V DC								B			
		30 V DC								C			
		48 V DC								D			
		60 V DC								E			
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								F			
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								G			
	With undervoltage release (UVR), instantaneous	24 V DC								J			
		30 V DC								K			
		48 V DC								L			
		60 V DC								U			
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								M			
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								N			
		380 ... 415 V AC 50/60 Hz								P			
	With undervoltage release (UVR-t) ¹⁾ , delay 0.2 ... 3.2 s	48 V DC								Q			
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC								R			
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC								S			
		380 ... 415 V AC 50/60 Hz								T			

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

¹⁾ The maximum allowable cable length to the actuator for quick shutdown is currently ≤ 50 m (maximum allowable cable length between the terminals ≤ 100 m).

Accessory options



For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add “-Z” to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for basic configuration

Rated operational voltage 1000 V AC and 690 V IT networks ⁴⁾

- Only for circuit breakers of size 1–3 with high breaking capacity H and of size 3 breaking capacity C.
- Cannot be combined with rated operational voltage 1150 V AC, order code “A15”.

Size 1 ¹⁾	≤ 2000 A	A05
Size 2 ^{1) 2)}	≤ 4000 A	A05
Size 3 ¹⁾	≤ 6300 A	A05

Rated operational voltage 1150 V AC

- Only for circuit breakers with high breaking capacity H (8th digit of the article number is a “4”).
- Cannot be combined with rated operational voltage 1000 V AC, order code “A05”.

Size 2 ^{1) 2)}	≤ 4000 A	A15
Size 3 ^{1) 3)}	≤ 6300 A	A15

Rated operational voltage 690 V AC (+20%) ⁴⁾

- Only for 3WL11 circuit breakers, size 1 ⁴⁾, with high breaking capacity H (8th digit of the article number is a “4”).

Size 1	≤ 2000 A	A16
--------	----------	-----

¹⁾ When ordering withdrawable circuit breaker and guide frame separately, specify order code “A05” only for withdrawable circuit breaker and guide frame.

²⁾ Not possible for circuit breakers with very high breaking capacity C.

³⁾ Front connections are tinned as standard.

⁴⁾ When using withdrawable circuit breakers in conjunction with old guide frames (3WL92...-A...-..... or 3WL92...-B...-.....), additional Z option A41 must be ordered.



1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for ETU electronic trip units

Rating plugs

- Only one module is possible per circuit breaker (not in conjunction with ETU15B electronic trip unit).
- As standard, the electronic trip units are equipped with a rating plug which is equal to the maximum rated circuit breaker current ($I_{n \max}$).
The rated current of the selected rating plug must be less than $I_{n \max}$.

Module	Sizes 1, 2	250 A	B02
		315 A	B03
		400 A	B04
		500 A	B05
		630 A	B06
		800 A	B08
		1000 A	B10
	Sizes 1, 2, 3	1250 A	B12
		1600 A	B16
		2000 A	B20
	Sizes 2, 3	2500 A	B25
		3200 A	B32
		4000 A	B40
	Size 3	5000 A	B50
		6300 A	B63

Communication ¹⁾

Breaker status sensor (BSS)	For determining the statuses ON/OFF/Tripped	F01
PROFIBUS DP communication port ²⁾	Including COM15 and breaker status sensor (BSS)	F02
Modbus RTU communication port ²⁾	Including COM16 and breaker status sensor (BSS)	F12
PROFINET IO/Modbus TCP communication port ²⁾	Including COM35 and breaker status sensor (BSS)	F35

Metering function (communications modules not included) ¹⁾

Metering function Plus	With internal voltage tap on the lower main conducting paths ³⁾	F36
	With internal voltage tap on the upper main conducting paths ³⁾	F37
	For combination with external voltage transformer	F38

EMC filter

- Common-mode interference suppressor filters (e.g. in converter applications)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB.

EMC filter		F31
------------	--	-----

Overload and short-circuit protection for neutral conductors

- Only possible with 4-pole circuit breaker with ETU27B to ETU76B

Internal current transformer for N conductor	Size 1	F23
	Size 2	F23
	Size 3	F23

¹⁾ The precondition is an ETU45B or ETU76B

²⁾ When ordering withdrawable circuit breaker and guide frame separately, specify order code "F02", "F12" or "F35" only for withdrawable circuit breaker.

³⁾ Can only be used for rated operational voltages up to 690 V AC.

Accessory options



For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for ETU electronic trip units

Remote resetting

Automatic reset of the reclosing lockout

- Remote reset for displays and reset buttons including automatic reset of the reclosing lockout
- Includes automatic reset of the reclosing lockout

K01

Remote trip alarm reset coils

24 V DC

K10

48 V DC

K11

110 ... 127 V AC 50/60 Hz/110 ... 125 V DC

K12

208 ... 240 V AC 50/60 Hz/220 ... 250 V DC

K13

Connection

Tinned version of the customer's connections on the guide frame

- Only for withdrawable circuit breakers with horizontal connection or flange connection
- The normal delivery time increases to 15 work days

Customer's connections ^{1) 2)}

Size 1

A08

Size 2

A08

Size 3

A08

Connection technology for main connections (fixed-mounted versions)

Top:³⁾ horizontal

Size 1

≤ 1600 A

N11

Bottom: accessible from front, single hole

Size 2

≤ 3200 A

N11

Size 3⁴⁾

≤ 4000 A

N11

Top: vertical

Size 1

≤ 2000 A

N20

Bottom: horizontal

Size 2

≤ 3200 A

N20

Size 3

≤ 5000 A

N20

Top: horizontal

Size 1

≤ 2000 A

N24

Bottom: vertical

Size 2

≤ 3200 A

N24

Size 3

≤ 5000 A

N24

Connection technology for main connections (withdrawable versions)

Top and bottom:^{5) 6)}

accessible from front, single hole

Size 1

≤ 1600 A

P00

Size 2

≤ 3200 A

P00

Size 3

≤ 4000 A

P00

Top and bottom:⁵⁾

accessible from front, double hole

Size 1

≤ 1600 A

P01

Size 2

≤ 3200 A

P01

Size 3

≤ 4000 A

P01

Top:^{5) 6)} horizontal

Size 1

≤ 1600 A

P07

Bottom: accessible from front, single hole

Size 2

≤ 3200 A

P07

Size 3

≤ 4000 A

P07

¹⁾ Front connections are tinned as standard.

²⁾ The permissible temperature rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

³⁾ Not for 3WL1 size 1 with high breaking capacity H and circuit breakers with very high breaking capacity C.

⁴⁾ Not for size 3 with very high breaking capacity C.

⁵⁾ Not for size 2, 3 circuit breakers with very high breaking capacity C.

⁶⁾ Not for 3WL1 size 1 with high breaking capacity H



1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Connection

Connection technology for main connections (withdrawable versions)

Top: vertical Bottom: horizontal	Size 1	≤ 2000 A	P18
	Size 2	≤ 3200 A	P18
	Size 3	≤ 5000 A	P18
Top: ¹⁾ connecting flange Bottom: horizontal	Size 1	≤ 2000 A	P19
	Size 2	≤ 3200 A	P19
	Size 3	≤ 4000 A	P19
Top: horizontal Bottom: vertical	Size 1	≤ 2000 A	P23
	Size 2	≤ 3200 A	P23
	Size 3	≤ 5000 A	P23
Top: ¹⁾ horizontal Bottom: connecting flange	Size 1	≤ 2000 A	P28
	Size 2	≤ 3200 A	P28
	Size 3	≤ 4000 A	P28

Connection technology for auxiliary conductors (for fixed-mounted and withdrawable versions)

Connection technology for screwless terminals (tension spring)	Fixed-mounted	N61
	Withdrawable	P61

Operating mechanisms and auxiliary releases

Motorized operating mechanisms	Only possible if the 13th digit of the article number = "1"	24 ... 30 V DC	M01
		48 ... 60 V DC	M03
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M05
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M06
Mechanical operating cycles counter, 5-digit ²⁾			C01
Closing coils	• Suitable for uninterrupted duty, 100% OP • Only possible if the 13th digit of the article number = "1"	24 V DC	M21
		30 V DC	M22
		48 V DC	M23
		60 V DC	M24
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M25
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M26
	• Not suitable for uninterrupted duty, 5% OP, synchronizable ³⁾ • Only possible if the 13th digit of the article number = "1"	24 V DC	M31
		48 V DC	M33
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M35
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M36
Opening coils (shunt trips) ^{3) 4)}	Not suitable for uninterrupted duty, 5% OP, synchronizable	24 V DC	M41
		48 V DC	M43
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M45
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	M46

¹⁾ Not for size 2, 3 circuit breakers with very high breaking capacity C.

²⁾ Only possible with motorized operating mechanism.

³⁾ Overexcited, i.e. switching time 50 ms (standard > 80 ms).

⁴⁾ Only possible if the 14th digit of the article number for the circuit breaker is "A", i.e. "without 1st auxiliary release".

Accessory options



For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Auxiliary switches and signaling switches

Position signaling switches for guide frames		1 CO 1 CO 1 CO (connected test disconnected position)	R15
		3 CO 2 CO 1 CO (connected test disconnected position)	R16
Signaling switches	Ready-to-close signaling switch (S20)	1 NO	C22
	Spring charge signaling switch ¹⁾ (S21)	1 NO	C20
	For the first auxiliary release ¹⁾ (S22)	1 CO	C26
	For the second auxiliary release ¹⁾ (S23)	1 CO	C27
	1st tripped signaling switch ^{1) 2)} (S24)	1 CO	K07
	2nd tripped signaling switch ^{1) 2) 3)} (S25)	1 NO	K06

Further accessories

Pushbuttons/disconnect switches/closing lockouts

EMERGENCY-OFF pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton		S24
Local electric close on operator panel ¹⁾ (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)	With sealing cap	C11
		With CES lock	C12
Motor disconnect switch on operator panel ⁴⁾ (S12)	This prevents automatic charging of the stored energy mechanism by motorized operating mechanism		S25

Special packaging for increased transport requirements (moisture protection)

Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)	A61
--	-----

Arc chute covers

- Not available for:
 - 1000 V version (order code "A05"),
 - DC version
 - 4000 A size 2
 - 1150 V version (order code "A15")
 - 130 kA version, size 2
 - 150 kA version, size 3

Arc chute covers	3-pole/4-pole	R10
------------------	---------------	-----

Shutters

Shutter: 2-part, lockable, with padlocks ⁵⁾	3-pole/4-pole	R21
--	---------------	-----

¹⁾ Not possible with "communications interface" option, order code "F02", "F12" or "F35".
²⁾ Not available for non-automatic air circuit breakers.

³⁾ Only possible with option "K07".

⁴⁾ Only for breakers with motorized operating mechanism, not possible with order codes "C11", "C12".

⁵⁾ Padlock not included in the scope of supply.



To specify the options, add “-Z” to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Further accessories

Instrument transformers (without energy transformers), for powering the ETU

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
 - External 24 V DC supply required
 - Instantaneous undervoltage release UVR required
 - Not possible with instantaneous undervoltage release UVR 380 ... 415 V AC
 - Not possible with delayed undervoltage release UVR-t
- Comprises:
 - 3 (3-pole) or 4 (4-pole) transformers
 - 24 V DC relay
 - Warning signs
 - Manual

Transformer	3-pole/4-pole	Sizes 2, 3	K60
-------------	---------------	------------	-----

Operating instructions in printed form

- As of June 1, 2023, 3WL circuit breakers and non-automatic circuit breakers are no longer supplied with operating instructions as standard. However, they can be supplied together with the circuit breaker for an additional charge.

Article numbers for separate ordering of operating instructions can be found in chapter “Accessories and spare parts”

3WL operating instructions German/English	A80
3WL operating instructions Italian/French	A81
3WL operating instructions Spanish/Portuguese	A82

Accessory options



For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add “-Z” to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Interlocking

Mechanical interlocking mechanism

- Interlocking module with Bowden cable 2 m

Mechanical interlocks

For fixed-mounted breakers	S55
For withdrawable circuit breakers with guide frame ¹⁾	R55
For guide frames (ordered separately)	R56
For withdrawable circuit breakers (ordered separately)	R57

Locking provisions (for fixed-mounted and withdrawable versions)

- The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1

Locking provisions	Against unauthorized closing from the operator panel	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL ²⁾	S05
		Assembly kit for padlocks ³⁾	S07
		Made by RONIS	S08
		Made by PROFALUX	S09

Locking provisions (for fixed-mounted and withdrawable versions)

Locking provisions	For charging handle with padlock ³⁾	S33
--------------------	--	-----

¹⁾ Not available in combination with R40.

²⁾ Locks must be ordered from the manufacturer.

³⁾ Padlock not included in the scope of supply.



To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Interlocking

Locking provisions (for withdrawable version)

- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced.
- Not possible in combination with order code "R81", "R85" or "R86".

Locking provisions	Against unauthorized closing from the operator panel	Made by CES	R61
		Made by RONIS	R68
		Made by PROFALUX	R60

Locking provisions (for withdrawable version)

- Safety lock for mounting onto the circuit breaker

Locking provisions	To prevent movement of the withdrawable circuit breaker	Made by CES	S71
		Made by PROFALUX	S75
		Made by RONIS	S76

Locking mechanisms

- Not possible in combination with order code "R81", "R85" or "R86".

For fixed-mounted circuit breakers	To prevent opening of the cabinet door in ON position	S30
For withdrawable circuit breakers	To prevent opening of the cabinet door in connected position	R30
	To prevent activation when the cabinet door is open ¹⁾	R40
	To prevent movement when the cabinet door is open ²⁾	R50

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position

- Consisting of Bowden cable and lock in the control cabinet door
- Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60"

Made by CES	R81
Made by PROFALUX	R85
Made by RONIS	R86

Seals

Door sealing frame for degree of protection IP41	T40
--	-----

Accessories from current catalog

Use of the withdrawable circuit breaker in combination with an older guide frame

Reduction of the technical specifications for withdrawable circuit breakers 3WL1 for use in combination with older guide frames supplied

- Possible article numbers of the existing "older" guide frames
 - 3WL92...-A...-....
 - 3WL92...-B...-....
 - 3WL92...-D...-....
 - 3WL92...-E...-....
 - Article numbers of circuit breakers with reduced technical specifications
 - 3WL1...-3...-.... - Z
 - 3WL1...-4...-.... - Z
- For sizes 1, 2, 3.

Use of the circuit breaker in older guide frames, including the appropriate guide frame coding	A41
--	-----

¹⁾ Not available in combination with R50 and R55

²⁾ Not available in combination with R40

Accessory options



Further technical specifications

Manual operating mechanism

3WL11 – 3WL13

Switching on/charging energy store

Maximum force required to operate the hand lever

≤ 230 N

Required number of strokes on the hand lever

9

Closing coils

Note:

The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/52](#)

Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

Motor

Note:

The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/52](#)

Signals of the electronic trip unit

3WL11 – 3WL13

Signals of the electronic trip unit

Measuring accuracy of the electronic trip unit

Protective functions acc. to EN 60947; current indication ≤ 10%;
metering function for base quantities ≤ 1%; metering function
for derived quantities ≤ 4%

Undervoltage releases UVR (F3) and UVR-t (F4)

Note:

The undervoltage releases (UVR/UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/53](#)

Shunt trip (ST) (F1, F2)

Note:

The shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/54](#)

Please note: The communication-capable shunt trips (ST-COM) can be used only in conjunction with 3WA.

Remote trip alarm reset coil for mechanical tripped indicator (F7)

Note:

The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/54](#)

Contact position-driven auxiliary switches (S1, S2, S3, S4, S7, S8)

Note:

The switch position dependent auxiliary switches are identical for the 3WL and 3WA and can be used in both circuit breaker lines.

You will find the technical specifications in section 3WA [see page 1/54](#)



Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

3WL11 – 3WL13

Breaking capacity			
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V	
	Rated operational current I_e	8 A	
Direct current	Rated operational voltage U_e	125 V	250 V
	Rated operational current I_e	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC	

Tripped signaling switches (S24) and signaling switches for auxiliary releases (S22, S23) (acc. to DIN VDE 0630)

3WL11 – 3WL13

Breaking capacity				
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V		
	Rated operational current I_e /AC-12	8 A		
Direct current	Rated operational voltage U_e	24 V	125 V	250 V
	Rated operational current I_e /DC-12	6 A	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC		
Tripped signaling switches				
Signal duration after tripping		Until manual or electrical remote reset (option)		

Position signaling switch on guide frame

3WL11 – 3WL13

Type of contacts				
Message	“Circuit breaker in connected position”	3 W	or	1 W
	“Circuit breaker in test position”	2 W	or	1 W
	“Circuit breaker in disconnected position”	1 W	or	1 W
Contact reliability		From 1 mA at 5 V DC		
Rated operational voltage				
Rated insulation voltage U_i	50/60 Hz AC	440 V		
	DC	250 V		
Rated operational voltage U_e		250 V		
Rated impulse withstand voltage U_{imp}		4 kV		
Breaking capacity				
Rated operational current I_e	$I_e/AC-12$	24 V 10 A, 110/127 V 10 A, 220/240 V 10 A, 320/440 V 10 A		
	$I_e/AC-15$	220/240 V 4 A, 320/440 V 3 A,		
	$I_e/DC-12$	24 V 10 A, 48 V 2.5 A, 220/240 V 0.2 A,		
	$I_e/DC-13$	24 V 3.0 A, 220/240 V 0.1 A		
	A300 AC	120 V 6 A, 240 V 3 A		
	R300 DC	125 V 0.22 A, 250 V 0.11 A		

Guide frames for AC



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

		5	6	7	8	9	10	11	12	13	14	15	16
3WL9		2	1		–					–			1
Size (SZ)	1			1									
	2			2									
	3			3									
		SZ 1	SZ 2	SZ 3									
Max. rated current $I_{n \max}$ (guide frames)	1000 A ^{5) 6)}	■	–	–	1								
	1600 A ^{5) 6)}	■	–	–	2								
	2000 A ⁶⁾	■	■	–	3								
	2500 A ⁶⁾	–	■	–	4								
	3200 A ⁷⁾	–	■	–	5								
	4000 A ⁶⁾	–	■	■	6								
	5000 A	–	–	■	7								
	6300 A	–	–	■	8								
Number of poles	3-pole					F							
	4-pole					G							
Main connection	Front, single hole	■ ¹⁾	■ ^{2) 6)}	■ ³⁾		A							
	Front, double hole	■	■ ^{2) 6)}	■ ³⁾		B							
	Horizontal	■	■ ²⁾	■ ⁴⁾		C							
	Vertical	■	■	■		D							
	Connecting flange	■	■ ^{2) 6)}	■ ³⁾		E							
Short-circuit breaking capacity I_{cu} at 500 V	N	55 kA	■	–	–								N
	S	66 kA	■	–	–								S
	H	85 kA	■ ⁵⁾	–	–								H
	N, S and H	≤ 100 kA	–	■	■								H
	C	130 kA	–	■	–								C
	C	150 kA	–	–	■								C

¹⁾ Not available for rated circuit breaker current 2000 A and breaking capacity H

²⁾ Not available for rated circuit breaker current 4000 A

³⁾ Not available for rated circuit breaker current 5000 A + 6300 A + breaking capacity C

⁴⁾ Not available for rated circuit breaker current 6300 A

⁵⁾ For size 1 with breaking capacity H, please select the max. rated current I_n 2000 A of the guide frame

⁶⁾ Not available for breaking capacity C

⁷⁾ For all rated circuit breaker currents up to 3200 A with breaking capacity C

Options

		5	6	7	8	9	10	11	12	13	14	15	16
3WL9		2	1		–					–			1
Number of auxiliary supply connectors	Without							0					
	1 connector							1					
	2 connectors							2					
	3 connectors							3					
	4 connectors							4					
Type of auxiliary circuit connections	Without ⁸⁾							0					
	With screw terminals (SIGUT, standard)							1					
	With screwless terminals (tension spring)							2					
Position signaling switch	Without									0			
	1 CO 1 CO 1 CO (connected test disconnected position)									1			
	3 CO 2 CO 1 CO (connected test disconnected position)									2			
Shutters	Without										A		
	With shutter, 2-part, lockable										B		

⁸⁾ Can only be selected if the number of auxiliary supply connectors is zero.



Guide frames for DC

1

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frame, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

3WL9		5	6	7	8	9	10	11	12	13	14	15	16
		2	1	2	–					–		0	1
Max. rated current $I_{n \max}$	2000 A				3								
	4000 A				6								
Number of poles	3-pole					H							
	4-pole					J							
Main connection	Front, single hole ¹⁾						A						
	Front, double hole ¹⁾						B						
	Horizontal						C						
	Vertical						D						
	Connecting flange						E						

¹⁾ Not available for rated circuit breaker current 4000 A

Options

3WL9		5	6	7	8	9	10	11	12	13	14	15	16
		2	1	2	–					–		0	1
Number of auxiliary supply connectors	Without							0					
	1 connector							1					
	2 connectors							2					
	3 connectors							3					
	4 connectors							4					
Type of auxiliary circuit connections	Without ²⁾								0				
	With screw terminals (SIGUT, standard)								1				
	With screwless terminals (tension spring)								2				
Position signaling switch	Without									0			
	1 CO 1 CO 1 CO (connected test disconnected position)									1			
	3 CO 2 CO 1 CO (connected test disconnected position)									2			
Shutters	Without										A		
	With shutter, 2-part, lockable										B		

²⁾ Can only be selected if the number of auxiliary supply connectors is zero.

Accessories and spare parts



Accessories for ETU electronic trip units


Electronic trip units and optional metering function



- For replacement in existing circuit breakers, please specify the circuit breaker ID No. when ordering.
- The electronic trip unit is supplied without a rating plug
- The rating plug must be ordered separately

Type	With protective function	Metering function	Article No.
ETU15B	LI	Without	3WL9311-5AA00-0AA2
ETU25B	LSI	Without	3WL9312-5AA00-0AA2
ETU27B	LSING	Without	3WL9312-7AA00-0AA2
ETU45B (without display)	LSIN(G)	Without	3WL9314-5AA00-0AA2
		With metering function Plus	3WL9314-5AA30-0AA2
ETU76B	LSIN(G)	Without	3WL9317-6AA00-0AA2
		With metering function Plus	3WL9317-6AA30-0AA2

Rating plugs



- With the rating plug selected, the maximum rated current $I_{n \max}$ of the circuit breaker must not be exceeded. The following applies: $I_n \leq I_{n \max}$

Size	Rated current I_n	Article No.
1, 2	250 A	3WL9111-0AA51-0AA0
	315 A	3WL9111-0AA52-0AA0
	400 A	3WL9111-0AA53-0AA0
	500 A	3WL9111-0AA54-0AA0
	630 A	3WL9111-0AA55-0AA0
	800 A	3WL9111-0AA56-0AA0
	1000 A	3WL9111-0AA57-0AA0
1, 2, 3	1250 A	3WL9111-0AA58-0AA0
	1600 A	3WL9111-0AA61-0AA0
	2000 A	3WL9111-0AA62-0AA0
2, 3	2500 A	3WL9111-0AA63-0AA0
	3200 A	3WL9111-0AA64-0AA0
	4000 A	3WL9111-0AA65-0AA0
3	5000 A	3WL9111-0AA66-0AA0
	6300 A	3WL9111-0AA67-0AA0

Ground-fault modules



- Alarm and tripping
- For direct metering of the ground-fault current, e.g. in the neutral point of the transformer, a 1200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker is 0.11 Ω . If the ground-fault current is to be determined using the vectorial sum of the phases, a transformer must be installed in the neutral conductor.

Type	Accessory for	Article No.
GFM AT 45B	ETU45B	3WL9111-0AT53-0AA0
GFM AT 55B – 76B	ETU76B	3WL9111-0AT56-0AA0

Display



Accessory for	Version	Article No.
ETU45B	4-line	3WL9111-0AT81-0AA0

Internal current transformers, for N conductor including wiring kit

ETU Release 2	Size	Article No.
–	1	3WL9111-0AA11-0AA0
	2	3WL9111-0AA12-0AA0
	3	3WL9111-0AA13-0AA0
✓	1	3WL9111-0AA14-0AA0
	2	3WL9111-0AA15-0AA0
	3	3WL9111-0AA16-0AA0


External current transformers for N conductor

Copper connection pieces	Size	Article No.
–	1	3WL9111-0AA21-0AA0
	2	3WL9111-0AA22-0AA0
	3	3WL9111-0AA23-0AA0
✓	1	3WL9111-0AA31-0AA0
	2	3WL9111-0AA32-0AA0
	3	3WL9111-0AA33-0AA0







Accessories for ETU electronic trip units


EMC filter				
- Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters) - Insertion loss (asymmetric) in the range 40 kHz to 10 MHz > 40 dB.				
Types			Article No.	
Only for ETU Release 2			3WL9111-0AK34-0AA0	
Sealable and lockable covers				
	Accessory for		Article No.	
	ETU15B to ETU45B		3WL9111-0AT45-0AA0	
	ETU76		3WL9111-0AT46-0AA0	
Automatic reset of the reclosing lockout				
Version			Article No.	
Spare part for option K01			3WL9111-0AK21-0AA0	
Remote trip alarm reset coils				
Note:				
The remote trip alarm reset coils are identical for the 3WL and 3WA and can be used in both circuit breaker lines.				
You will find the article numbers of the remote trip alarm reset coils in section 3WA – Accessories and spare parts see page 1/63				
				
Retrofittable internal wiring				
Use	Male connector	Accessory for	Article No.	
Internal wiring of CubicleBUS for connection to terminal X8	Without male connector	ETU45B and ETU76B	3WL9111-0AK30-0AA0	
For connection of the external N and G transformers to terminal X8	Without male connector	Not for ETU Release 2	3WL9111-0AK31-0AA0	
		ETU Release 2	3WL9111-0AK33-0AA0	

Locking provisions and interlocks























































































































































































































































































































































































































Accessories and spare parts



Locking provisions and interlocks


Locking provision against unauthorized closing, for withdrawable circuit breakers



- The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68


Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA51-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA53-0AA0
Made by KIRK-Key ¹⁾	Without locks, cylinders or keys	3WL9111-0BA57-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA58-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA50-0AA0

Locking provisions for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for option S33	Without padlock	3WL9111-0BA71-0AA0

Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76


Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA73-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA75-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA76-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA77-0AA0
Made by KIRK-Key ¹⁾	Without locks, cylinders or keys	3WL9111-0BA80-0AA0

Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WL9111-0BA43-0AA0

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



- Consisting of Bowden cable and lock in the cabinet door on the circuit breaker
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WL9111-0BA81-0AA0
Made by IKON	3WL9111-0BA83-0AA0
Made by PROFALUX	3WL9111-0BA85-0AA0
Made by RONIS	3WL9111-0BA86-0AA0

Locking mechanisms to prevent opening of the cabinet door in ON position




- Fixed-mounted
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option S30	3WL9111-0BB12-0AA0

¹⁾ Locks, cylinders and keys must be ordered from the manufacturer.



Locking provisions and interlocks

Locking mechanisms to prevent opening of the cabinet door				
- Guide frames - Defeatable Note: Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").				
Version			Article No.	
Spare part for option R30			3WL9111-0BB13-0AA0	
Locking mechanisms to prevent movement with the cabinet door open				
- Guide frames Note: Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").				
Version			Article No.	
Spare part for option R50			3WL9111-0BB15-0AA0	
Mechanical interlocks				
With Bowden cable 2000 mm (one required for each circuit breaker)				
	Type	When ordered separately	Spare part for	Article No.
	Fixed-mounted circuit breaker	–	Option S55	3WL9111-0BB21-0AA0
	Module for withdrawable circuit breakers with guide frame	–	Option R55 ¹⁾	3WL9111-0BB24-0AA0
	Module for guide frame	✓	Option R56	3WL9111-0BB22-0AA0
	Module for withdrawable circuit breaker	✓	Option R57	3WL9111-0BB23-0AA0
	Adapter for size 3 withdrawable circuit breaker	✓	–	3WL9111-0BB30-0AA0
Couplings on the circuit breaker (with ring) for mutual interlocking				
Can be used in all circuit breakers				
				Article No.
				3WL9112-8AH47-0AA0
Bowden cable				
	Length			Article No.
	2000 mm			3WL9111-0BB45-0AA0
	3000 mm			3WL9111-0BB46-0AA0
	4500 mm			3WL9111-0BB47-0AA0

¹⁾ Not available in combination with R40

Test devices

Manual tester	
	For testing the overcurrent release functions for electronic trip units ETU15B to ETU76B (Release 1 and Release 2)
Article No.	
3WL9111-0AT32-0AA0	
Function test unit	
For testing the tripping characteristics for ETU15B to ETU76B electronic trip units (Release 1 and Release 2)	
Article No.	
3WL9111-0AT44-0AA0	
TD400 test device ¹⁾	
	- Commissioning/service tool for 3VA and 3WL with ETU Release 2 - Not suitable for 3WL10 and 3VA27 - Power supply via batteries or the USB-C interface - USB-C interface for connecting a PC with SENTRON Powerconfig - Bluetooth interface for connection to a PC, smartphone or tablet - Including adapter, connecting cable and case
Connection	
On the front interface of the ETU	
Article No.	
3VW9011-0AT40	
TD400 adapter (spare part)	
Version	
Article No.	
For 3VA	
3VW9011-0AT43	
For 3WL ETU Release 1	
3VW9011-0AT44	
For 3WL ETU Release 2	
3VW9011-0AT45	
For 3WA ETU300	
3VW9011-0AT46	


¹⁾ A country-specific radio license is required to operate the Bluetooth interface.
Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

Accessories and spare parts




Indicators and control elements

Ready-to-close signaling switches (S20)



Version	Contacts	Article No.
Spare part for option C22	1 NO	3WL9111-0AH01-0AA0

Signaling switch (S22 or S23)



- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for options C26 and C27	1st or 2nd auxiliary release	3WL9111-0AH02-0AA0

1st tripped signaling switch (S24)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally


Version	Contacts	Article No.
Spare part for option K07	1 CO	3WL9111-0AH14-0AA0

2nd tripped signaling switch (S25)

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally
- Can only be used in combination with 1st tripped signaling switch

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WL9111-0AH17-0AA0

Operating cycles counters



- Only in conjunction with motorized operating mechanism


Version	Version	Article No.
Spare part for option C01	Mechanical	3WL9111-0AH07-0AA0

Spring charge signaling switch

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally


Version	Contacts	Article No.
Spare part for option C20	1 NO	3WL9111-0AH08-0AA0

Position signaling switches for guide frames



Version	Contacts	Article No.
Spare part for options R15	3 changeover contacts (1 × connected/1 × test/1 × disconnected position)	3WL9111-0AH11-0AA0
Spare part for options R16	6 changeover contacts (3 × connected/2 × test/1 × disconnected position)	3WL9111-0AH12-0AA0

Local electric close (S10) for operator panel




- Not possible with communication port, order code "F02", "F12" or "F35".
- Not possible with motor disconnect switch
- Button + wiring (Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally)
- **Note:** Possible only for circuit breakers with closing coil.






Version	Type	Article No.
Spare part for options C11 and C12	With sealing cap C11	3WL9111-0AJ02-0AA0
	With CES assembly kit C12	3WL9111-0AJ03-0AA0
	With IKON assembly kit	3WL9111-0AJ05-0AA0



Indicators and control elements

Motor disconnect switch (S12)	
- Mounting onto operator panel - Not possible with local electric close	
Version	Article No.
Spare part for option S25	3WL9111-0AJ06-0AA0
EMERGENCY-OFF pushbuttons	
 Mushroom pushbutton instead of the mechanical OFF pushbutton	
Type	Article No.
Spare part for option S24	3WL9111-0BA72-0AA0

Auxiliary conductor connections

Male connectors for circuit breakers ①	
	Article No. 3WA9111-0AB01
Extension for male connector	
Male connector must be ordered separately	
Version	Article No.
1000 V	3WA9111-0AB02
Auxiliary supply connector for circuit breakers or guide frames ②	
	Article No. 3WA9111-0AB03
	Article No. 3WL9111-0AB04-0AA0
Coding kits ③	
	Article No. 3WA9111-0AB07
Sliding contact modules for guide frames ④	
	Article No. 3WA9111-0AB08
One-part sliding contact modules for guide frames ⑤	
	Article No. 3WL9111-0AB18-0AA0
Blanking blocks for circuit breakers	
	Article No. 3WA9111-0AB12

For a complete auxiliary circuit connection you must order:

Fixed-mounted version: ① + ② + ③


Withdrawable version: ① + ④ + ② or ① + ⑤

Accessories and spare parts



Auxiliary release

Closing coils/shunt trips


Note:

The closing coils (CC) and shunt trips (ST) are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA [see page 1/67](#)

Please note: The communication-capable closing coils (CC-COM) can be used only in conjunction with 3WA.

Closing coils (CC), 5% OP (momentary duty) with cut-off switch S15


Note:


The closing coils (CC) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA [see page 1/68](#)

Shunt trip (ST), 5% OP (momentary duty) with cut-off switch S14


Note:

The shunt trips (ST) with 5% OP are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA [see page 1/68](#)


Undervoltage release


Note:

The undervoltage releases (UVR and UVR-t) are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA [see page 1/68](#)

Operating mechanism


Motorized operating mechanisms


Note:

The motor operators are identical for the 3WL and 3WA and can be used in both circuit breaker lines. You will find article numbers in section 3WA [see page 1/68](#)

Auxiliary contacts

Auxiliary switch blocks


Contacts

2 NO + 2 NC

2 NO

1 NO + 1 NC

Article No.

3WL9111-0AG01-0AA0

3WL9111-0AG02-0AA0

3WL9111-0AG03-0AA0



Door sealing frames, hoods, shutters

Door sealing frames



Version	Article No.
Spare part for option T40	3WL9111-0AP01-0AA0

Protective covers IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides


Article No.
3WL9111-0AP02-0AA0

Shutters

Version	Number of poles	Size	Breaking capacity	Article No.
Spare part for option R21	3-pole	1	N, S, H	3WL9111-0AP04-0AA0
		2	N, S, H	3WL9111-0AP06-0AA0
			C	3WL9111-0AP43-0AA0
		3	H, C	3WL9111-0AP07-0AA0
	4-pole	1	N, S, H	3WL9111-0AP08-0AA0
		2	N, S, H	3WL9111-0AP11-0AA0
			C	3WL9111-0AP44-0AA0
		3	H, C	3WL9111-0AP12-0AA0

Arc chute


Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V	1	N, S, H	3WL9111-0AS01-0AA0
	2	N, S, H	3WL9111-0AS02-0AA0
		C	3WL9111-0AS10-0AA0
	3	H, C	3WL9111-0AS03-0AA0
1000 V/1150 V	2	H, C	3WL9111-0AS05-0AA0
	3	H, C	3WL9111-0AS06-0AA0

Arc chute covers


- Parts kit for guide frame
- Spare part for option R10
- Not available for:
 - 1000 V version (order code "A05"),
 - 1150 V version (order code "A15")
 - DC version
 - 4000 A size 2
 - Circuit breakers with very high breaking capacity C.



Number of poles	Size	Article No.
3-pole	1	3WL9111-0AS32-0AA0
	2	3WL9111-0AS36-0AA0
	3	3WL9111-0AS38-0AA0
4-pole	1	3WL9111-0AS42-0AA0
	2	3WL9111-0AS44-0AA0
	3	3WL9111-0AS46-0AA0

Coding for withdrawable version

Coding for withdrawable version



- By customer, for 36 coding variants

Size	Article No.
1, 2	3WL9111-0AR12-0AA0
3	3WL9111-0AR13-0AA0

Accessories and spare parts



Grounding connections

Grounding connection between the guide frame and the withdrawable circuit breaker



- Up to 30 kA or 60 kA ground-fault current
- 2 modules must be used for up to 60 kA ground-fault current

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 ¹⁾		3WL9111-0BA01-0AA0
	3		3WL9111-0BA02-0AA0
For withdrawable circuit breakers	1	3-pole	3WL9111-0BA05-0AA0
		4-pole	3WL9111-0BA08-0AA0
	2	3-pole ¹⁾	3WL9111-0BA06-0AA0
		4-pole ¹⁾	3WL9111-0BA04-0AA0
	3	3-pole	3WL9111-0BA07-0AA0
		4-pole	3WL9111-0BA10-0AA0

¹⁾ Cannot be used for size 2 with very high breaking capacity C and size 2, 4000 A.

Support bracket

Support bracket



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WL9111-0BB50-0AA0

CubicleBUS modules

- Each **CubicleBUS** module is supplied with a 0.2 m pre-assembled cable to connect the modules with each other. A longer pre-assembled cable is required for connection to the circuit breaker.
- All communication components, **CubicleBUS** modules and metering functions are available for the ETU45B and ETU76B electronic trip units.

Modules of the CubicleBUS modules



Type	Article No.
Digital output module with rotary coding switch, relay outputs	3WL9111-0AT26-0AA0
Digital output module, configurable, relay outputs	3WL9111-0AT20-0AA0
Digital input module	3WL9111-0AT27-0AA0
Analog output module	3WL9111-0AT23-0AA0
ZSI module	3WL9111-0AT21-0AA0

Preassembled cables for the CubicleBUS

For connection to 3WL	Length	Article No.
With COM15/COM16/COM35	0.2 m	3WL9111-0BC04-0AA0
	1 m	3WL9111-0BC02-0AA0
	2 m	3WL9111-0BC03-0AA0
Without COM15/COM16/COM35	2 m	3WL9111-0BC05-0AA0

Voltage transformers

- Required for 3WL circuit breakers with metering function Plus, if no direct voltage tap is available.
- 380 ... 690 V/100 V, class 0.5

Number of poles	Metering function	Article No.
3-pole	With metering function Plus	3WL9111-0BB68-0AA0



Retrofitting and spare parts

- For retrofitting the COM15, COM16 or COM35 communications modules in withdrawable 3WL circuit breakers with Z options A05 (1000 V AC), A15 (1150 V AC) or A16 (690 V + 20%), the following additional assembly kits are required: 3WL9111-0AT62-0AA0 for circuit breakers size 1 or 3WL9111-0AT63-0AA0 for circuit breakers size 2/3

COM35 PROFINET IO/Modbus TCP modules		
	Version	Article No.
	For ETU45B and ETU76B electronic trip units	3WL9111-0AT65-0AA0
PROFINET IO/Modbus TCP retrofit kits		
Retrofit kit for the PROFINET IO/Modbus TCP communication including COM35, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units		
		Article No.
		3WL9111-0AT66-0AA0
PROFIBUS retrofit kits		
Retrofit kit for the PROFIBUS communication including COM15, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units		
		Article No.
		3WL9111-0AT12-0AA0
COM15 PROFIBUS modules		
	Version	Article No.
	For ETU45B and ETU76B electronic trip units	3WL9111-0AT15-0AA0
COM16 Modbus RTU modules		
		Article No.
For ETU45B and ETU76B electronic trip units		3WL9111-0AT17-0AA0
Modbus RTU retrofit kits IEC		
Retrofit kit for the Modbus communication including COM16, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units		
		Article No.
		3WL9111-0AT18-0AA0
Additional parts for retrofitting the COM15/COM16/COM35 communications modules		
- In withdrawable 3WL circuit breakers with Z options: - A05 (1000 V AC) or - A15 (1150 V AC) or - A16 (690 V + 20%)		
Size		Article No.
1		3WL9111-0AT62-0AA0
2, 3		3WL9111-0AT63-0AA0
Breaker status sensors (BSS)		
	Version	Article No.
	- For acquisition via communication of the circuit breaker states ON/OFF/tripped - For ETU45B and ETU76B electronic trip units	3WL9111-0AT16-0AA0
Operating instructions in printed form		
Description		Article No.
3WL operating instructions – Upgrade DE/EN		3ZW1012-0WL11-0AB1
3WL operating instructions – DE/EN		3ZX1812-0WL00-0AN4
3WL operating instructions – Upgrade IT/FR		3ZW1012-0WL11-0AD1
3WL operating instructions – IT/FR		3ZX1812-0WL00-0AJ3
3WL operating instructions – Upgrade ES/PT		3ZW1012-0WL11-0AE1
3WL operating instructions – ES/PT		3ZX1812-0WL00-0AL3
Article number assignment for 3WL or 3WL upgrade		Article No.
3WL breakers		3WL1 - - - 3 - - -
		3WL1 - - - 4 - - -
3WL breakers upgrade		3WL1 - - - 6 - - -
		3WL1 - - - 7 - - -
3WL guide frames		3WL921 - A - - -
		3WL921 - B - - -
		3WL921 - D - - -
		3WL921 - E - - -
3WL guide frames upgrade		3WL921 - F - - -
		3WL921 - G - - -
		3WL921 - H - - -
		3WL921 - I - - -

Accessories and spare parts



Interfaces

Interface to the IEC 61850

- The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.

Type	Operational voltage	Article No.
SICAM CP-8021 ¹⁾	–	6MF2802-1AA00
SICAM CP-8050 ²⁾	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00

¹⁾ Dimensioned for device quantities of max. 1 × 3WL and 1 × 3VA


²⁾ Dimensioned for device quantities of 3 × 3WL and 8 × 3VA

You will find further information at:

www.siemens.com/sicam-a8000

For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.

The modules can be obtained free of charge via SiePortal www.siemens.com/lowvoltage/product-support (109816057)

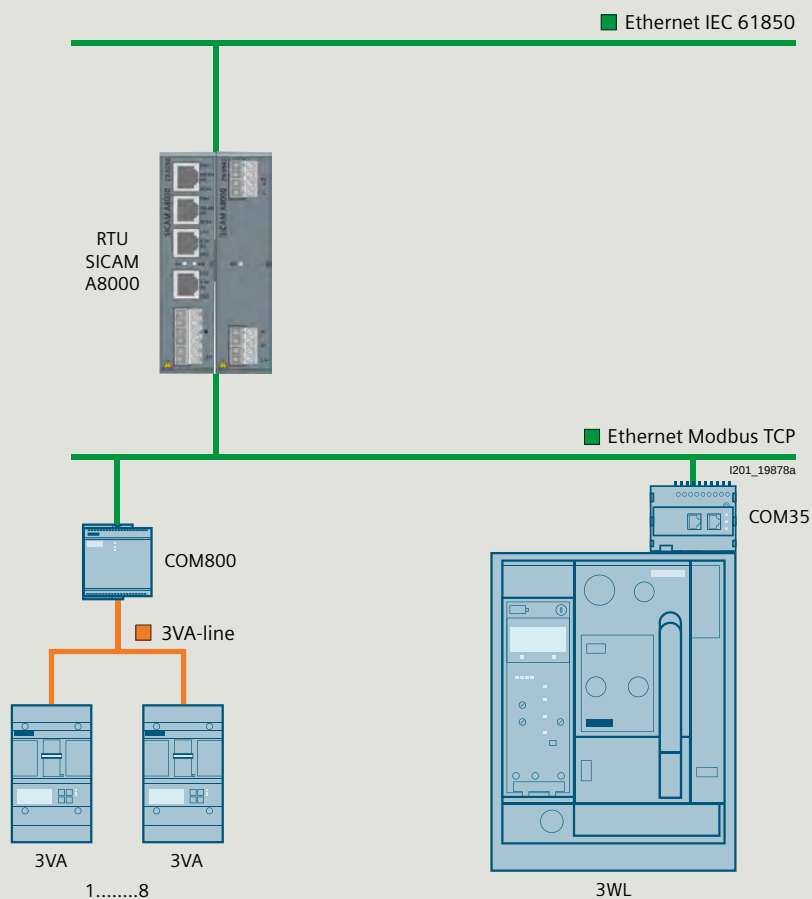



Storage devices

Capacitor trip device		
- For shunt trips - Storage time 5 min - Also suitable for 3VL, 3VA and 3WN circuit breakers Note: Rated control supply voltage must match the rated control supply voltage of the shunt trips.		
Rated control supply voltage/rated operational voltage		Article No.
50/60 Hz AC	DC	
220 ... 240 V	220 ... 250 V	3WL9111-0BA14-0AA0

Spare parts


Metering function Plus for retrofitting		
- As spare part or for retrofitting the metering function Plus with an external voltage transformer - For ETU45B or ETU76B Release 2 - A measuring accuracy of 3% is achieved if retrofitted. Note: External voltage transformer required		
		Article No.
		3WL9111-0AT05-0AA0
Voltage converter		
Version		Article No.
As a spare part for the metering function Plus		3WL9111-0AT06-0AA0
Components for conversion of an existing internal voltage tap		
- Conversion requires 3 components for 3-pole 3WL - Conversion requires 4 components for 4-pole 3WL - Conversion of a metering function (Z option A05) is not possible.		
Conversion of internal voltage tap to main contact	Size	Article No.
From bottom to top	1	3WL9111-0AT71-0AA0
	2	3WL9111-0AT72-0AA0
	3	3WL9111-0AT73-0AA0
From top to bottom	1	3WL9111-0AT74-0AA0
	2	3WL9111-0AT75-0AA0
	3	3WL9111-0AT76-0AA0
Transformers (without iron core), Rogowski coil only (instrument transformer for the protective function)		
- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B - External 24 V DC supply required - Undervoltage release 3WA9111-0AE02 (UVR 24 ... 30 V DC) required - As retrofit kit or as spare part. With new circuit breakers, please use the Z option K60 Scope of supply: - Transformer - Warning signs - Manual		
Number of poles	Size	Article No.
3-pole	1	3WL9111-0AA42-0AA0
	2	3WL9111-0AA43-0AA0
	3	3WL9111-0AA44-0AA0
4-pole	1	3WL9111-0AA45-0AA0
	2	3WL9111-0AA46-0AA0
	3	3WL9111-0AA47-0AA0

Accessories and spare parts



Main conductor connections, fixed-mounted versions (essential accessory)


Front-accessible main connections, single hole at top



- Not for 3WL1 size 1 with high breaking capacity H

Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AL01-0AA0
	1250 ... 1600 A	3WL9111-0AL02-0AA0
2 ⁴⁾	≤ 2000 A	3WL9111-0AL03-0AA0
	≤ 2500 A	3WL9111-0AL04-0AA0
	≤ 3200 A	3WL9111-0AL05-0AA0
3	≤ 4000 A	3WL9111-0AL06-0AA0


Front-accessible main connections, single hole at bottom



- Not for 3WL1 size 1 with high breaking capacity H


Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AL51-0AA0
	1250 ... 1600 A	3WL9111-0AL52-0AA0
2 ⁴⁾	≤ 2000 A	3WL9111-0AL53-0AA0
	≤ 2500 A	3WL9111-0AL54-0AA0
	≤ 3200 A	3WL9111-0AL55-0AA0
3	≤ 4000 A	3WL9111-0AL56-0AA0

Front-accessible main connections according to DIN 43673, double hole at top




Size	Rated current I_n	Article No.
1	≤ 1000 A ¹⁾	3WL9111-0AL07-0AA0
	1250 ... 2000 A ⁵⁾	3WL9111-0AL08-0AA0
2 ⁴⁾	≤ 2000 A	3WL9111-0AL11-0AA0
	≤ 2500 A	3WL9111-0AL12-0AA0
	≤ 3200 A	3WL9111-0AL13-0AA0
3	≤ 4000 A	3WL9111-0AL14-0AA0

Front-accessible main connections according to DIN 43673, double hole at bottom



Size	Rated current I_n	Article No.
1	≤ 1000 A ¹⁾	3WL9111-0AL57-0AA0
	1250 ... 2000 A ⁵⁾	3WL9111-0AL58-0AA0
2 ⁴⁾	≤ 2000 A	3WL9111-0AL61-0AA0
	≤ 2500 A	3WL9111-0AL62-0AA0
	≤ 3200 A	3WL9111-0AL63-0AA0
3	≤ 4000 A	3WL9111-0AL64-0AA0

Rear vertical main connections



Size	Rated current I_n	Article No.
1 ²⁾	≤ 2000 A	3WL9111-0AM01-0AA0
2 ³⁾	≤ 3200 A	3WL9111-0AM02-0AA0
3	≤ 6300 A	3WL9111-0AM03-0AA0

¹⁾ Not for 3WL1 size 1 with high breaking capacity H

²⁾ In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WL9111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9111-0AM01-0AA0 vertical connections are required.

³⁾ In the case of vertical connection size 2, up to 2500 A one 3WL9111-0AM02-0AA0 vertical connection is required, up to 3200 A two 3WL9111-0AM02-0AA0 vertical connections are required.


⁴⁾ Not for circuit breakers with very high breaking capacity C.

⁵⁾ Can be used for size 1 with H breaking capacity of 630 ... 2000 A.




Main conductor connections, withdrawable versions (essential accessory)

Front-accessible main connections, single hole at top or at bottom ^{1) 2)}




Size	Rated current I_n	Article No.
1	≤ 1000 A	3WL9111-0AN01-0AA0
	1250 ... 1600 A	3WL9111-0AN02-0AA0
2 ³⁾	≤ 2000 A	3WL9111-0AN03-0AA0
	≤ 2500 A	3WL9111-0AN04-0AA0
	≤ 3200 A	3WL9111-0AN05-0AA0
	≤ 4000 A	3WL9111-0AN06-0AA0

Front-accessible main connections according to DIN 43673, double hole at top or at bottom ¹⁾



Size	Rated current I_n	Article No.
1	≤ 1000 A ²⁾	3WL9111-0AN07-0AA0
	1250 ... 2000 A ³⁾	3WL9111-0AN08-0AA0
2 ³⁾	≤ 2000 A	3WL9111-0AN11-0AA0
	≤ 2500 A	3WL9111-0AN12-0AA0
	≤ 3200 A	3WL9111-0AN13-0AA0
	≤ 4000 A	3WL9111-0AN14-0AA0

Supports for front and DIN connection bars



Number of poles	Size	Article No.
3-pole for 3 bars	1	3WL9111-0AN41-0AA0
	2	3WL9111-0AN42-0AA0
	3	3WL9111-0AN43-0AA0
4-pole for 4 bars	1	3WL9111-0AN44-0AA0
	2	3WL9111-0AN45-0AA0
	3	3WL9111-0AN46-0AA0

Rear vertical main connections




Size	Rated current I_n	Connection pieces	Article No.
1	≤ 1000 A ²⁾		3WL9111-0AN15-0AA0
	1250 ... 2000 A ²⁾		3WL9111-0AN16-0AA0
2	≤ 2000 A ⁴⁾		3WL9111-0AN17-0AA0
	≤ 2500 A ⁴⁾		3WL9111-0AN18-0AA0
	≤ 3200 A ⁴⁾		3WL9111-0AN21-0AA0
	≤ 5000 A		3WL9111-0AN22-0AA0
3	≤ 6300 A	3 pieces for 3-pole switches	3WL9111-0AN23-0AA0
	≤ 6300 A, top	4 pieces for 4-pole switches	3WL9111-0AN20-0AA0
	≤ 6300 A, bottom	4 pieces for 4-pole switches	3WL9111-0AN10-0AA0

Rear horizontal main connections

Size	Rated current I_n	Article No.
1	≤ 1000 A ²⁾	3WL9111-0AN32-0AA0
	1250 ... 2000 A ²⁾	3WL9111-0AN33-0AA0
2	≤ 2000 A ⁴⁾	3WL9111-0AN34-0AA0
	≤ 2500 A ⁴⁾	3WL9111-0AN35-0AA0
	≤ 3200 A ⁴⁾ and 4000 A DC	3WL9111-0AN36-0AA0
	≤ 5000 A	3WL9111-0AN37-0AA0

Connecting flange



Size	Rated current I_n	Article No.
1	≤ 1000 A ²⁾	3WL9111-0AN24-0AA0
	1250 ... 2000 A ²⁾	3WL9111-0AN25-0AA0
2 ³⁾	≤ 2000 A	3WL9111-0AN26-0AA0
	≤ 2500 A	3WL9111-0AN27-0AA0
	≤ 3200 A	3WL9111-0AN28-0AA0
	≤ 4000 A	3WL9111-0AN31-0AA0

¹⁾ When using front-accessible main connections (withdrawable circuit breakers) supports are required.

²⁾ Not for 3WL1 size 1 with high breaking capacity H

³⁾ Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.

⁴⁾ Not for circuit breakers with very high breaking capacity C.

Accessories and spare parts



Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WL1 circuit breakers with very high breaking capacity C and for circuit breakers with Z options A05, A15 or A16


Number of poles	Size	Article No.
3-pole	1	3WL9111-OBC11-0AA0
	2	3WL9111-OBC12-0AA0
	3	3WL9111-OBC13-0AA0
4-pole	1	3WL9111-OBC14-0AA0
	2	3WL9111-OBC15-0AA0
	3	3WL9111-OBC16-0AA0

Note:

When the conversion kit is ordered, the switch ID (on the operator panel of the 3WL) must also be stated

Main contacts

Main contacts ^{1) 2)}



- **Notes:**
 - The circuit breaker ID number must be specified when ordering ³⁾
 - Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units)
 - Article number is automatically adapted to the circuit breaker ID No.

Size	Rated current I_n	Article No.
1	$\leq 1600 \text{ A}$ ⁴⁾	3WL9111-0AM90 L1Y
2	$\leq 2500 \text{ A}$	3WL9111-0AM91 L1Y
	$\leq 4000 \text{ A}$	3WL9111-0AM92 L1Y
3	$\leq 6300 \text{ A}$	3WL9111-0AM93 L1Y

¹⁾ Not for circuit breakers with very high breaking capacity C.

²⁾ Replacement of the main contacts for 3WL1 circuit breakers with very high breaking capacity C is only possible at the factory.

³⁾ Please specify the circuit breaker ID No. in plain text when ordering.

⁴⁾ Not for size 1 circuit breakers with breaking capacity H and circuit breakers with $I_n = 2000 \text{ A}$. The main contacts can only be replaced in the factory.

Online configurator highlights

www.siemens.com/lowvoltage/configurators

Direct entry of an already known article number


Including download option of all available documents

1




Product list stores multiple configurations and can transfer them collectively to the shopping cart

Recall of completed configurations for modification or additional configuration

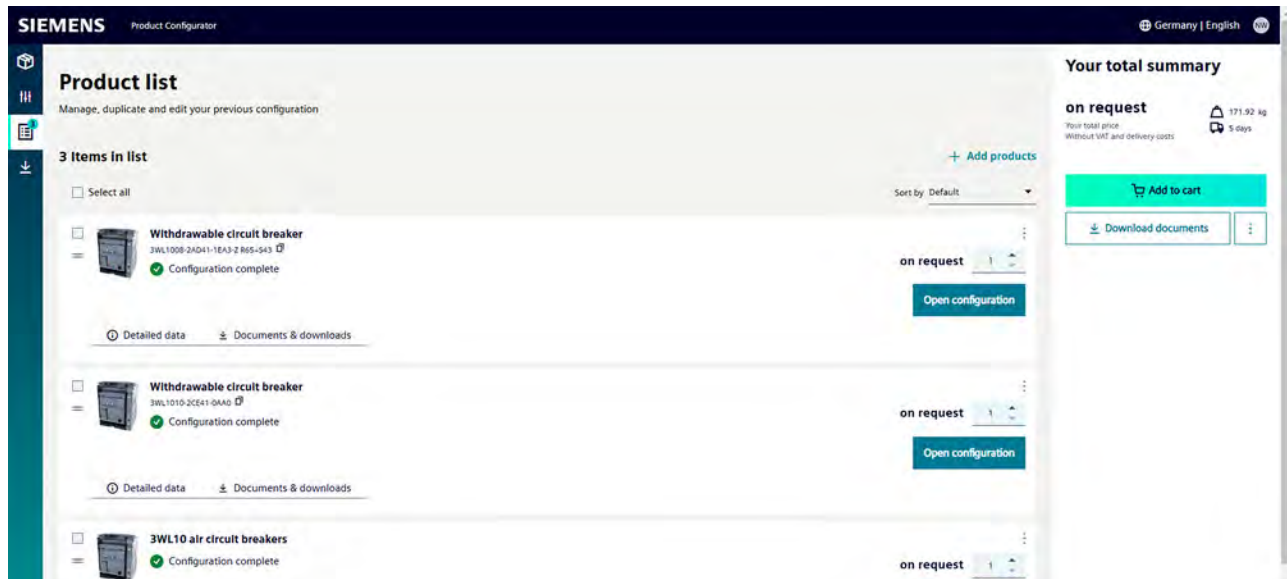

Responsive Design



www.siemens.com/lowvoltage/3wl10-configurator

Download an ePlan selector for 3WL10

The screenshot displays the Siemens Product Configurator interface for the 3WL10 air circuit breaker. The left sidebar shows the configuration tree with 'Basic configuration' expanded. The main area is divided into 'Summary' and 'CAD preview'. The 'Summary' section includes 'Downloads and links' (Technical documentation: Datasheet, EPLAN Macro (EDZ); Links: Request Service & Support), 'Commercial product data' (Price on request, Standard delivery time 5 days, Weight 48.36 kg, Product status PM300: Active product), and a 'CAD preview' showing a 3D model of the breaker. The right sidebar shows the '3WL10 air circuit breakers' configuration details, including 'Configuration complete', 'on request' status, 'Your total price' (48.36 kg), and 'Configuration details' (Rated current in 800 A, Breaking capacity class N (55kA Icu@440VAC, 50kA@500V and 42kA Icu@690VAC), Number of poles 4 poles - Neutral left, Assembly option draw out, Main connection (required isolation measures are always included within the delivery of the respective breaker) comes with terminal cover low, Motor operator 24V - 30V).

Ungroup into individual components

Divides the finished complete article number into single article numbers

The screenshot displays the Siemens Product Configurator interface for the 3WL10 air circuit breaker, showing the 'Basic configuration' section. The 'Standard' configuration is selected. The 'Electrical parameters' section shows 'Rated current in' (800 A) and 'Breaking capacity class' (N (55kA Icu@440VAC, 50kA@500V and 42kA Icu@690VAC)). The 'Number of poles' section shows 'Number of poles' (4 poles - Neutral left). The 'Assembly option' section shows 'Assembly option' (draw out). The right sidebar shows the '3WL10 air circuit breakers' configuration details, including 'Configuration complete', 'on request' status, 'Your total price' (75.97 kg), and 'Configuration details' (Rated current in 800 A, Breaking capacity class N (55kA Icu@440VAC, 50kA@500V and 42kA Icu@690VAC), Number of poles 4 poles - Neutral left, Assembly option draw out, Main connection (required isolation measures are always included within the delivery of the respective breaker) comes with terminal cover low, Motor operator 24V - 30V). The 'Components' section lists individual components: 3WL1008-2AD41-0A00 (Withdrawable circuit breaker), 3W8112-0BA01 (Guide frame for 3WL10-4p_rear_vertical), 3W9011-0A03 (Rear terminal adjust_4pcs_withdraw), 3W9011-0A01 (Motor operator_MO_24-30_V_acdc), 3W9011-0A04 (Auxiliary_solenoid_STCC_60_V_acdc), and 3W9011-0A003 (Auxiliary_solenoid_STCC_60_V_acdc).

Structure of the article numbers

Basic configuration

The structure shown below is intended as an overview of each position and its meaning.

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

3WL10				6	7	—	8	9	10	11	12	—	13	14	15	16		
Circuit breakers, non-automatic circuit breakers and ETU																		
Max. rated current $I_{n\ max}$	630 A			0	6													
	800 A			0	8													
	1000 A			1	0													
	1250 A			1	2													
Short-circuit breaking capacity I_{cu} at 415 V	B	Basic (42 kA)					1											
	N	ECO (55 kA)					2											
	S	Standard (66 kA)					3											
Non-automatic circuit breaker ¹⁾	Without metering function, without communications interface		Without trip unit					A	A									
Circuit breakers, ETU 3-series	Without metering function, without communications interface	With trip unit		ETU320 LI	(N) ²⁾		A	B										
				ETU350 LSI	(N) ²⁾		A	C										
				ETU360 LSIG	(N) ²⁾		A	D										
Circuit breakers, ETU 6-series			With trip unit	ETU650 LSI	(N) ²⁾			E										
				ETU660 LSIG	(N) ²⁾			F										
	Without communications interface	Without metering function				A												
	With communications interface	Without metering function				B												
		Metering function Basic	Voltage tap on bottom				C											
			Voltage tap on top				D											
		Metering function Advanced	Voltage tap on bottom				E											
			Voltage tap on top				F											
Number of poles	Fixed-mounted versions	3-pole								0								
		4-pole	Neutral left							1								
			Neutral right							2								
	Withdrawable	3-pole								3								
		4-pole	Neutral left							4								
Neutral right								5										

¹⁾ Only possible with N = ECO (55 kA) and S = Standard (66 kA)

²⁾ Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or for 4-pole breakers

¹⁾ Only possible with N = ECO (55 kA) and S = Standard (66 kA)

²⁾ Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or for 4-pole breakers

Connection ³⁾

Type of mounting	Withdrawable	Without frame	0
		Rear vertical connection	1
		Rear horizontal connection	2
		Adapter for cable lug connection (rear)	4
		Front-accessible, extended main connection	5
	Fixed-mounted versions	Rear vertical connection	1
		Rear horizontal connection	2
		Front main connection	3
		Circular conductor terminals (front)	4
		Front-accessible, extended main connection	5

³⁾ Broadened connections available as accessories.

3WL10

6	7	8	9	10	11	12	13	14	15	16
		—					—			

Motor

Operating mechanisms	Manual operating mechanism	0
	Spring charging motor	1
	24 ... 30 V AC/DC	2
	48 ... 60 V AC/DC	3
	110 V AC/DC	4

Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without closing coil, without remote reset magnet	A
	Closing coils (CC)	B
	24 V AC/DC	C
	30 V AC/DC	D
	48 V AC/DC	E
	60 V AC/DC	F
	110 ... 120 V AC/DC	G
	120 ... 127 V AC/DC	H
	220 ... 240 V AC/DC	J
	240 ... 250 V AC/DC	K
	Closing coil (CC) and additional remote reset magnet (RR)	L
	24 V AC/DC	M
	110 V AC/DC	
	220 V AC/DC	

2nd auxiliary release	Without 2nd auxiliary release	A
	With undervoltage release (UVR)	B
	24 V AC/DC	C
	30 V AC/DC	D
	48 V AC/DC	E
	60 V AC/DC	F
	110 ... 120 V AC/DC	G
	120 ... 127 V AC/DC	H
	220 ... 240 V AC/DC	J
	240 ... 250 V AC/DC	K
	380 ... 400 V AC/DC	L
	415 ... 440 V AC/DC	M
	With undervoltage release (UVR), delayable with external time-delay device	N
	Scope of supply: UVR + time-delay device	P
	220 ... 250 V AC/DC	Q
	With 2nd shunt trip (ST2)	R
	24 V AC/DC	S
	30 V AC/DC	T
	48 V AC/DC	U
	60 V AC/DC	V
	110 ... 120 V AC/DC	W
	120 ... 127 V AC/DC	X
	220 ... 240 V AC/DC	
	240 ... 250 V AC/DC	

1st auxiliary release	Without 1st Auxiliary release	0
	Shunt trips (ST)	1
	24 V AC/DC	2
	30 V AC/DC	3
	48 V AC/DC	4
	60 V AC/DC	5
	110 ... 120 V AC/DC	6
	120 ... 127 V AC/DC	7
	220 ... 240 V AC/DC	8

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for basic configuration

Mounting options for fixed-mounted versions

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel. Floor mounting is possible as an option. The device must additionally be modified if it is to be extended to include functionalities such as external auxiliary switches or mechanical interlocking mechanism.¹⁾

Mounting options for fixed-mounted versions ¹⁾	Floor mounting	Mounting support standard	A07
		Mounting support extended ²⁾	S56
	Rear panel mounting onto mounting plate	Side wall extended ²⁾	S57

Accessories for ETU electronic trip units

Rating plugs

- As standard, the electronic trip units are equipped with a rating plug for setting the rated current I_n , which is equal to the maximum rated circuit breaker current ($< I_{n \max}$). The rated current of the selected rating plug must be less than or equal to $I_{n \max}$.
- To downrate the circuit breaker, a rated current smaller than $I_{n \max}$ is selected for the rating plug via a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

Rating plug	For setting the rated current I_n	For all ETUs	400 A	B04
			630 A	B06
			800 A	B08
			1000 A	B10
	For setting the rated current I_n , with overload protection L = OFF	For 6-series ETUs	400 A	L04
			630 A	L06
			800 A	L08
			1000 A	L10
			1250 A	L12
	For setting the rated current I_n , for enabling of the residual current protective function. The residual current function is only possible with the MF Advanced metering function.	For ETU660 only	400 A	G04
			630 A	G06
			800 A	G08
			1250 A	G12

Communications modules

- No more than two different communications modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only 1 communications module can be used.

Communications modules	COM040	PROFIBUS	F02
	COM041	PROFINET	F03
	COM043	Modbus TCP	F11
	COM042	Modbus RTU	F12

Breaker Connect modules

- When a circuit breaker with a communications interface is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110 ... 240 V AC/DC.

Breaker Connect modules	110 ... 240 V AC/DC	F26
-------------------------	---------------------	-----

I/O modules internal

I/O modules internal	Digital I/O module IOM040	2 inputs, 2 outputs	K56
----------------------	---------------------------	---------------------	-----

¹⁾ These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.

²⁾ Not possible in connection with or as an alternative to the mounting support, standard (A07).

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for the motor

Mechanical operating cycles counter, 5-digit

C01

Auxiliary switches and signaling switches

- Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard.
- For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be replaced.
- The auxiliary/signaling switches for 24 V DC digital signals are designed for
 - a minimum load above 1 mA at 5 V DC, and
 - a maximum breaking capacity of 100 mA at 24 V DC.

Position signaling switches for guide frames ¹⁾		2 CO 2 CO 2 CO (connected test disconnected position)	K55
Signaling switches	Ready-to-close signaling switches	1 CO digital, 24 V DC	K50
	Tripped signaling switches (S24)	1 CO digital, 24 V DC	K53
	Spring charge signaling switch (S21)	1 CO digital, 24 V DC	K54
Auxiliary switches	ON/OFF AUX	4 CO digital, 24 V DC	K51
		2 CO 400 V AC + 2 CO digital 24 V DC	K52

Locking, blocking and interlocking

Locking provisions ¹⁾	To prevent movement of the withdrawable circuit breaker	Cylinder lock	Made by RONIS	R78
		For no more than 3 padlocks, 8 mm		R65
Locking mechanisms	To prevent movement to disconnected position			R79
Locking provisions	Against unauthorized closing in the operator panel (safe OFF)	Cylinder lock, made by RONIS		S08
		For no more than 3 padlocks, plastic 4 mm		S22
		For no more than 1 padlock, metal 7 mm		S23
		For no more than 2 padlocks, metal 8 mm		S07
Interlocking sets	For mechanical Open and/or Close on the operator panel	For no more than 3 padlocks, plastic 4 mm		S42
		For no more than 1 padlock, metal 7 mm		S43
		For no more than 2 padlocks, metal 8 mm		S44
Protective covers	For mechanical Open/Close, not lockable			S41
Door sealing frames IP30	IP3x			T30

¹⁾ Can be used both for individual orders of the guide frame and complete orders (circuit breaker + guide frame).

Guide frames

1

Guide frames for ordering separately without circuit breakers



- Guide frames without breakers up to 1250 A
- **Note:** All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the circuit breaker. PSS Standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	Article No.
3-pole	Rear vertical	3VW8112-0AA01
	Rear horizontal	3VW8112-0AB01
	4 × 240 mm ² Cu/Al cable connection, for cable lug connections	3VW8112-0AD01
	Front connection bars, extended	3VW8112-0AE01
4-pole	Rear vertical	3VW8112-0BA01
	Rear horizontal	3VW8112-0BB01
	4 × 240 mm ² Cu/Al cable connection, for cable lug connections	3VW8112-0BD01
	Front connection bars, extended	3VW8112-0BE01

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VW8....-.....-.... -Z

Order code

Locking, blocking and interlocking

Locking provisions	To prevent movement of the withdrawable circuit breaker	Cylinder lock, made by RONIS	R78
		For no more than 3 padlocks, 8 mm	R65
Locking mechanisms	To prevent movement to disconnected position (only in combination with R78 or R65)		R79

Auxiliary/signaling switches

Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO 2 CO 2 CO (connected test disconnected position)	K55
---	---	---	-----

Auxiliary and signaling switches for currents > 100 mA and up to 400 V AC are installed as standard. For currents < 100 mA for PLC connections, these auxiliary and signaling switches can be modified. The auxiliary/signaling switches for 24 V DC digital signals are designed for

- a minimum load above 1 mA at 5 V DC, and
- a maximum breaking capacity of 100 mA at 24 V DC.

ETU electronic trip units and accessories

Electronic trip units (ETU)



Version	With communications/metering function/enhanced protective functions	Type	Protective function	Article No.
With rotary coding switches	No	ETU320	LIN	3VW9011-5AA00
		ETU350	LSIN	3VW9012-5AA00
		ETU360	LSING	3VW9012-7AA00
With display	Yes	ETU650	LSIN	3VW9017-5AA00
		ETU660	LSING	3VW9017-7AA00

Metering functions for ETU650 or ETU660




Description	Protective function/version	Arrangement	Article No.
Metering function	MF Basic	–	3VW9011-0AT01
	MF Advanced	–	3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with neutral right	Top or bottom	3VW9011-0AT08
	For 4-pole circuit breakers with neutral left	Top	3VW9011-0AT75
		Bottom	3VW9011-0AT76
	For 3-pole circuit breakers	Top	3VW9011-0AT72
		Bottom	3VW9011-0AT73

External current transformers for N conductor



Accessory for	Use	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	For 3-pole circuit breakers only	3VW9011-0AA30

External current transformers for transformer neutral point



Accessory for	G_{ret} (Ground return)	Article No.
ETU660	100 A	3VW9011-0GF30
	250 A	3VW9011-0GF31

Summation current transformers external Rc-CT for residual current metering



- Only with MF Advanced metering function and Rc rating plug

Accessory for	Use	Article No.
ETU660	For external residual current metering	3VW9011-0RC30

Remote reset magnets RR for the circuit breakers including tripped signaling



- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC	3VW9011-0AK03
	110 V AC/DC	3VW9011-0AK05
	250 V AC/DC	3VW9011-0AK06

Spare part batteries for ETU electronic trip unit



Accessory for	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	3VW9011-0AT38

ETU electronic trip units and accessories

Rating plugs



- Only one module is possible per circuit breaker.

Accessory for	Version	Rated current I_n	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting ($< I_{n\max}$) the rated current I_n	400 A	3VW9011-0AA53
		630 A	3VW9011-0AA55
		800 A	3VW9011-0AA56
		1000 A	3VW9011-0AA57
		1250 A	3VW9011-0AA58
ETU 6-series	Rating plug without overload protection (L = OFF) and for setting ($< I_{n\max}$) the rated current I_n	400 A	3VW9011-0LF53
		630 A	3VW9011-0LF55
		800 A	3VW9011-0LF56
		1000 A	3VW9011-0LF57
		1250 A	3VW9011-0LF58
ETU660	Rating plug Rc for ETU660, for enabling the residual current protective function and setting ($< I_{n\max}$) the rated current I_n . The residual current function is only possible with the MF Advanced metering function.	400 A	3VW9011-0RC53
		630 A	3VW9011-0RC55
		800 A	3VW9011-0RC56
		1250 A	3VW9011-0RC58

CB bus modules – communications modules



- Contains the communications module
- No more than two different communications modules can be used at the same time
- When using a digital I/O module IOM040 (Z option K56), only 1 communications module can be used
- Can only be used with ETU of the 6-series and require a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communications interface to the ETU 6-series is selected.

Communications module	Protocol	Article No.
COM040	PROFIBUS	3VW9011-0AT15
COM041	PROFINET	3VW9011-0AT14
COM043	Modbus TCP	3VW9011-0AT16
COM042	Modbus RTU	3VW9011-0AT17

CB bus modules – I/O modules external IOM300



- For snapping onto DIN rail

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	2 A at ≤ 30 V DC 0.8 A at 50 V DC 0.2 A at 150 V DC 4 A at 250 V AC	11	10	3VW9011-0AT20

CB bus modules – I/O modules internal IOM040



- When using a digital I/O module IOM040, only 1 communications module can be used

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	2 A at ≤ 30 V DC 0.8 A at 50 V DC 0.2 A at 150 V DC 4 A at 250 V AC	2	2	3VW9011-0AT30

Actuator module COM ACT



- For switching the circuit breaker on/off remotely via communication
- Actuation of the closing coil (CC) and the 1st shunt trip (ST)
- Can only be used in combination with a communications module, spring charging motor, closing coil and 1st shunt trip
- Automatically included if the communications interface of the ETU 6-series is selected in the basic circuit breaker configuration

Accessory for	Article No.
ETU 6-series	3VW9011-0AT10

Breaker Connect modules



- For external power supply for the electronics components

Voltage	Article No.
110 ... 240 V AC/DC	3VW9011-0AT06
24 ... 48 V DC	3VW9011-0AT07

Auxiliary contact signaling switch for communications interface



- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.
- Can only be used in combination with communications module.
- Can be combined with standard position signaling switches or ready-to-close signaling contacts.
- **Note:** Both signaling switches are automatically included in the basic circuit breaker (COM PSS only with withdrawable versions) if the communications interface of the ETU 6-series is selected.

Function	Article No.
Ready-to-close signaling switch for communication COM RTC	3VW9011-0AT11
Position signaling switch COM PSS (for withdrawable breaker only)	3VW9011-0AT12

Test devices and Breaker Data Adapters



- Can be used for all ETU 3-series and 6-series

Function	Type	Article No.
Test device • For the trip test via ETU and tripping solenoid including release • Activation of the ETU and the tripping solenoid by means of a battery built into the test device • On activation in the ETU 6-series, the parameters can be configured on the display	TD310	3VW9011-0AT32
Breaker Data Adapter • As gateway for parameterization of the ETU with SENTRON Powerconfig • For generation of a report of the set parameters with powerservice	TD410	3VW9011-0AT34
Test devices and Breaker Data Adapters • As gateway for parameterization of the ETU with SENTRON Powerconfig – Testing a tripping operation using SENTRON Powerconfig • For use with the powerservice software – Testing of the basic protective functions LSING – Testing of the enhanced protective functions – Test data storage – Readout of ETU buffer – Generation of a report of the set parameters	TD420	3VW9011-0AT33

Accessories and spare parts

Accessories for connection

Front main connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
	Fixed-mounted	Front main connections	3-pole/3 units	3VW9011-0AL01
			4-pole/4 units	3VW9011-0AL02
		Front main connections	3-pole/3 units	3VW9011-0AL77
			4-pole/4 units	3VW9011-0AL78
	Broadened main connections, including insulation plate and extended phase barriers	Front main connections, top	3-pole/3 units	3VW9011-0AL73
		Front main connections, bottom	3-pole/3 units	3VW9011-0AL75
		Front main connections, top, bottom	4-pole/4 units	3VW9011-0AL74
	Withdrawable	Front-accessible main connections	3-pole/3 units	3VW9011-0AN01
			4-pole/4 units	3VW9011-0AN02
	Broadened main connections	Front-accessible main connections	3-pole/3 units	3VW9011-0AN73
			4-pole/4 units	3VW9011-0AN74

Rear main connections acc. to IEC 60947-2

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
	Fixed-mounted	Rear main connections, rotatable for horizontal/vertical connection, including terminal cover	3-pole/3 units	3VW9011-0AL32
			4-pole/4 units	3VW9011-0AL33
	Withdrawable	Rear main connections, rotatable for horizontal/vertical connection, including terminal cover	3-pole/3 units	3VW9011-0AN32
			4-pole/4 units	3VW9011-0AN33
	Broadened main connections	Rear horizontal main connections	3-pole/3 units	3VW9011-0AN75
			4-pole/4 units	3VW9011-0AN76

Cu/Al cable connections

- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/ quantity	Article No.
	Fixed-mounted	Front main connections	3-pole/3 units	3VW9011-0AL71
			4-pole/4 units	3VW9011-0AL72
	Withdrawable	Rear vertical main connections	3-pole/3 units	3VW9011-0AN71
			4-pole/4 units	3VW9011-0AN72

Auxiliary supply connectors in push-in version


- Control wire tap in push-in version for upgrading fixed-mounted circuit breakers and guide frames.
- The device is always fitted at the factory with the exact number of control wire taps required.

Version	Article No.
Push-in	3VW9011-0AB11

¹⁾ For connecting Al cables up to 1000 A

Accessories for connection

Terminal covers for fixed-mounted circuit breakers



- Finger-proof for front main connection for fixed-mounted versions
- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.

Version	Number of poles/quantity	Article No.
Standard	3-pole/2 units	3VW9723-OWD30
	4-pole/2 units	3VW9724-OWD40
Extended	3-pole/2 units	3VW9723-OWF30
	4-pole/2 units	3VW9724-OWF40

Phase barriers for fixed-mounted circuit breakers



- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.
- For operational voltages > 440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.

Height	Number of poles/quantity	Article No.
100 mm (standard)	3-pole/4 units	3VW9723-OWA00
	4-pole/6 units	3VW9724-OWA10
200 mm (extended)	3-pole/4 units	3VW9723-OWA01
	4-pole/6 units	3VW9724-OWA11

Support for floor mounting of fixed-mounted circuit breakers



- For fixed-mounted versions

Version	Use	Article No.
Mounting support standard (circuit breaker feet) (= Z option A07)		3VW9011-0BB51
Mounting support extended (circuit breaker feet), including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB52

Extension kits for modification of the side wall of the fixed-mounted circuit breaker



- For fixed-mounted versions
- Rear wall fixing on mounting plate
- For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)

Version	Use	Article No.
Extension kit for side wall	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB53

Accessories and spare parts

Motor

Spring charging motor (MO)



Description	Voltage	Article No.
For automatic charging of the stored energy mechanism	24 ... 30 V AC/DC	3VW9011-0AF01
	48 ... 60 V AC/DC	3VW9011-0AF02
	100 ... 130 V AC/DC	3VW9011-0AF03
	220 ... 250 V AC/DC	3VW9011-0AF04

Mechanical operating cycles counters MOC



Description	Version	Article No.
In combination with a spring charging motor	5 digits	3VW9011-0AH07

Auxiliary releases, closing coils

Closing coils CC/shunt trips ST



Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

TD320 function test units for closing coils/shunt trips



- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested.
- The operational availability test is performed cyclically at intervals of 30 seconds.
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
 - LED POWER ON LIT: Correct function of the YO/YC test device
 - LED DEACTIVATION LIT: Power supply failure, wire break
 - LED SHORT-CIRCUIT LIT: Winding short-circuit
 - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
 - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trips OK

Version	Article No.
For all closing coils/shunt trips	3VW9011-0AT31

Auxiliary releases, closing coils

Auxiliary/signaling switches



- The auxiliary/signaling switches for 24 V DC digital signals are designed for
 - a minimum load above 1 mA at 5 V DC, and
 - a maximum breaking capacity of 100 mA at 24 V DC.
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted circuit breakers a 3VW9011-0BB5x side wall modification

Type	Contacts	Article No.
Ready-to-close signal RTC	1 CO standard	3VW9011-0AH01
	1 CO digital	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	3VW9011-0AG01
	4 CO digital	3VW9011-0AG02
	2 CO standard + 2 CO digital	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	3VW9011-0AG05
	15 CO digital	3VW9011-0AG06
Tripped signaling switch S24	1 CO standard	3VW9011-0AH14
	1 CO digital	3VW9011-0AH15
Spring charge signaling switch S21	1 CO standard	3VW9011-0AH10
	1 CO digital	3VW9011-0AH08
Position signaling switch PSS (for withdrawable devices)	2 CO 2 CO 2 CO (connected test disconnected position) standard	3VW9011-0AH11
	2 CO 2 CO 2 CO (connected test disconnected position) digital	3VW9011-0AH12

Fixing for external auxiliary switches AUX 15 CO



- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version	Article No.
For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	3VW9011-0AG15
For guide frames	3VW9011-0AG17

Undervoltage releases UVR



Voltage	Article No.
24 V AC/DC	3VW9011-0AE01
30 V AC/DC	3VW9011-0AE02
48 V AC/DC	3VW9011-0AE03
60 V AC/DC	3VW9011-0AE04
110 ... 120 V AC/DC	3VW9011-0AE05
120 ... 127 V AC/DC	3VW9011-0AE06
220 ... 240 V AC/DC	3VW9011-0AE07
240 ... 250 V AC/DC	3VW9011-0AE08
380 ... 400 V AC	3VW9011-0AE17
415 ... 440 V AC	3VW9011-0AE18

External time-delay devices for undervoltage release



- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage	Article No.
24 ... 30 V AC/DC	3VW9011-0AE10
48 V AC/DC	3VW9011-0AE11
60 V AC/DC	3VW9011-0AE15
110 ... 127 V AC/DC	3VW9011-0AE12
220 ... 250 V AC/DC	3VW9011-0AE13

Accessories and spare parts

Interlocking

Locking provision to prevent movement of the withdrawable circuit breaker



Version	Article No.
RONIS cylinder lock (spare part for R78)	3VW9011-0BA80
Padlock 8 mm (spare part for R65), for no more than 3 padlocks	3VW9011-0BA87

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87)	
Description	Article No.
Locking mechanism (spare part for R79)	3VW9011-0BA84

Locking provisions in OFF position



- For fixed-mounted and withdrawable versions - Against unauthorized closing in the operator panel (safe OFF) - The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1	
Description	Article No.
Cylinder lock, made by RONIS (spare part for S08)	3VW9011-0BA33

Locking provisions in OFF position



• For fixed-mounted and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1		
Description	Version	Article No.
Padlock 4 mm (spare part for S22)	Plastic for no more than 3 locks	3VW9011-0BA41
Padlock 7 mm (spare part for S23)	Metal for no more than 1 lock	3VW9011-0BA42
Padlock 8 mm (spare part for S07)	Metal for no more than 2 locks	3VW9011-0BA44

Interlocking sets for mechanical Open and/or Close on the operator panel



Description	Version	Article No.
Padlock 4 mm (spare part for S42)	Plastic for no more than 3 locks	3VW9011-0BA22
Padlock 7 mm (spare part for S43)	Metal for no more than 1 lock	3VW9011-0BA23
Padlock 8 mm (spare part for S44)	Metal for no more than 2 locks	3VW9011-0BA24

Protective covers for mechanical Open/Close



- Mechanical Open/Close to protect against unintentional actuation on the operator panel. - Not lockable	
Description	Article No.
Not lockable (spare part for S41)	3VW9011-0BA21

Mechanical interlocks



• Mechanical interlock for 3WL10/3VA27 with Bowden cable 2 m • For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered		
Mounting	Mounting	Article No.
Fixed-mounted	Rear panel or floor mounting	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	3VW9011-0BB22

Bowden cable, separate

One required for each circuit breaker	
Type	Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

Interlocking

Locking mechanisms for control cabinet door



- To prevent opening of the control cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open.

Mounting	Version	Article No.
Fixed-mounted onto side panel or floor	Direct fixed interlocking	3VW9011-0BB10
	Locking with Bowden cable	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	3VW9011-0BB14
	Locking with Bowden cable	3VW9011-0BB18

Door sealing frame IP30



- For IP4x and higher, you must order the protective cover IP54 3VW9011-0AP03 or 3VW9011-0AP13.

Description	Mounting	Version	Article No.
Spare part for Z option T30.	Fixed-mounted	IP3x	3VW9011-0AP01
	Withdrawable	IP3x	3VW9011-0AP02

Protective covers IP54



- Protective cover/hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator

Description	Version	Article No.
Lock with unique key	IP54	3VW9011-0AP03
Lock with standard key	IP54	3VW9011-0AP13

1