

SENTRON Switching and Protection Devices – Air Circuit Breakers

15



15/2

Introduction

3WL Air Circuit Breakers

3WL Air Circuit Breakers/
Non-Automatic Air Circuit Breakers
up to 6300 A (AC)

15/6

General data

15/7

3-pole, fixed-mounted versions

15/11

3-pole, withdrawable versions

15/15

4-pole, fixed-mounted versions

15/19

4-pole, withdrawable versions

15/23

Options

15/29

Accessories and spare parts

3WL Non-Automatic Air Circuit Breakers
up to 4000 A (DC)

15/50

3- and 4-pole, fixed-mounted versions

15/51

3-pole, withdrawable versions

15/52

4-pole, withdrawable versions

15/53

Accessories and spare parts

Introduction

Overview



Size I



Size II



Size III

Air circuit breakers

3WL air circuit breakers/non-automatic air circuit breakers up to 6300 A (AC)		3WL non-automatic air circuit breakers up to 4000 A (DC)				
Size		I, II, III			II	
Rated current I_n	A	630, 800, 1000, 1250, 1600, 2000, 2500, 3200, 4000, 5000, 6300			1000, 2000, 4000	
Number of poles		3-pole, 4-pole			3-pole, 4-pole	
Rated operational voltage U_e	V AC V DC	... 690/1000/1150 --			-- ... 1000	
Rated ultimate short-circuit breaking capacity at 500 V AC	kA	Size I 55/66	Size II 66/80/100	Size III 100/150 (3-pole), 130 (4-pole)	30/25/20 (at 300/600/1000 V DC)	
Endurance	Operating cycles	20000	15000	10000	15000	
Mounting position		 NSE0_00061a NSE0_00062a NSE0_00061a NSE0_00062a			 NSE0_00061a NSE0_00062a	
Degree of protection	With cover Without cover (with door sealing frame)	IP55 IP41			IP55 IP41	
Dimensions 3-/4-pole						
 NSS0_00535	Fixed mounting	W mm	320/410	460/590	704/914	460/590
	Withdrawable	H mm	434	434	434	434
		D mm	291	291	291	291
		H mm	465.5	465.5	465.5	465.5
D mm	471	471	471	471	471	

ETU15B¹⁾

ETU25B



ETU27B



ETU45B



ETU76B

Type

Electronic releases for SENTRON 3WL circuit breakers

Overload protection	✓	✓	✓	✓	✓
Short-time delayed short-circuit protection	--	✓	✓	✓	✓
Instantaneous short-circuit protection	✓	✓	✓	✓	✓
Neutral conductor protection	--	--	✓	✓	✓
Ground-fault protection	--	--	✓	□	□
Zone Selective Interlocking	--	--	--	□	□
LCD, 4-line	--	--	--	□	--
LCD, graphic	--	--	--	--	✓
Communication through PROFIBUS DP	--	--	--	□	□
Measurement function <i>Plus</i>	--	--	--	□	□
Selectable parameter sets	--	--	--	--	✓
Parameters freely programmable	--	--	--	--	✓
CubicleBUS	--	--	--	✓	✓

- ✓ Standard
- Not available
- Optional

¹⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

3WL air circuit breakers/non-automatic air circuit breakers according to UL 489 up to 5000 A, see Catalog LV 16.

Switching capacity

Size		I				II				III							
Type		3WL11				3WL12				3WL13							
Switching capacity class		N	\textcircled{N}	S	\textcircled{S}	N	\textcircled{N}	S	\textcircled{S}	H	\textcircled{H}	H	\textcircled{H}	C 3-pole	\textcircled{C}	C 4-pole	\textcircled{C}
Short-circuit breaking capacity																	
Rated operational voltage U_e up to 415 V AC																	
I_{cu}	kA	55		66		66		80		100		100		150		130	
I_{cs}	kA	55		66		66		80		100		100		150		130	
I_{cm}	kA	121		145		145		176		220		220		330		286	
Rated operational voltage U_e up to 500 V AC																	
I_{cu}	kA	55		66		66		80		100		100		150		130	
I_{cs}	kA	55		66		66		80		100		100		150		130	
I_{cm}	kA	121		145		145		176		220		220		330		286	
Rated operational voltage U_e up to 690 V AC																	
I_{cu}	kA	42		50		50		75		85		85		150		130	
I_{cs}	kA	42		50		50		75		85		85		150		130	
I_{cm}	kA	88		105		105		165		187		187		330		286	
Rated operational voltage U_e up to 1000 V/1150 V AC																	
I_{cu}	kA	--		--		--		--		50		50		70 ⁴⁾		70 ⁴⁾	
I_{cs}	kA	--		--		--		--		50		50		70 ⁴⁾		70 ⁴⁾	
I_{cm}	kA	--		--		--		--		150		105		154 ⁴⁾		154 ⁴⁾	
Rated short-time withstand current I_{cw} of the circuit breakers³⁾																	
0.5 s	kA	55		66		66		80		100		100		100		100	
1 s	kA	42		50		55		66		80		100		100		100	
2 s	kA	29.5		35		39		46		65 ^{1)/70²⁾}		80		80		80	
3 s	kA	24		29		32		37		50 ^{1)/65²⁾}		65		65		65	
Short-circuit breaking capacity I_{cc} of the non-automatic air circuit breakers																	
Up to 500 V AC	kA	55		66		66		80		100		100		100		100	
Up to 690 V AC	kA	42		50		50		75		85		85		100		100	

\textcircled{N} Circuit breakers with ECO switching capacity N
($I_{cu} = I_{cs}$ up to 55 kA size I/up to 66 kA size II at 500 V)

\textcircled{S} Circuit breakers with standard switching capacity S
($I_{cu} = I_{cs}$ up to 66 kA size I/up to 80 kA size II at 500 V)

\textcircled{H} Circuit breakers with high switching capacity H
($I_{cu} = I_{cs}$ up to 100 kA at 500 V)

\textcircled{C} Circuit breakers with very high switching capacity C
($I_{cu} = I_{cs}$ up to 150 kA (3-pole)/130 kA (4-pole)
at 500 V)

\textcircled{DC} Non-automatic air circuit breakers with DC switching
capacity

These circuit breakers are indicated in the selection and
ordering data by orange backgrounds.

1) Size II with $I_{n \max} \leq 2500$ A.

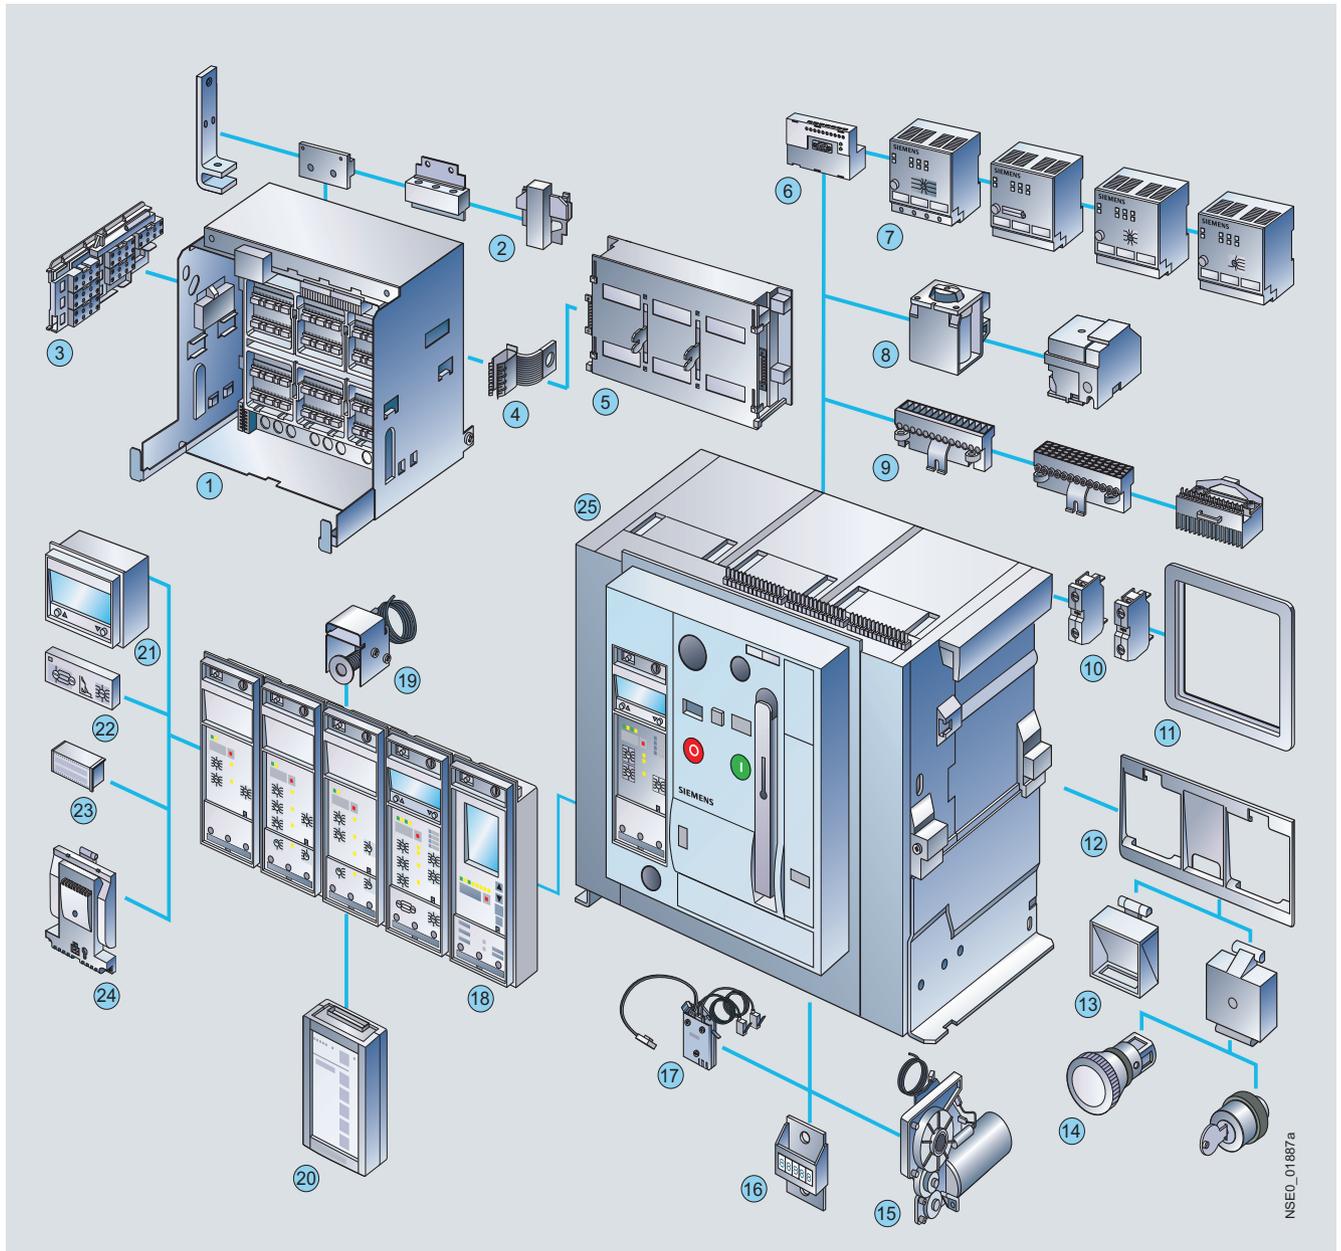
2) Size II with $I_{n \max} = 3200$ A and $I_{n \max} = 4000$ A.

3) At a rated voltage of 690 V the I_{cw} value of the circuit breaker cannot be
greater than the I_{cu} or I_{cs} value at 690 V.

4) Rated operational voltage $U_e = 1150$ V.

Introduction

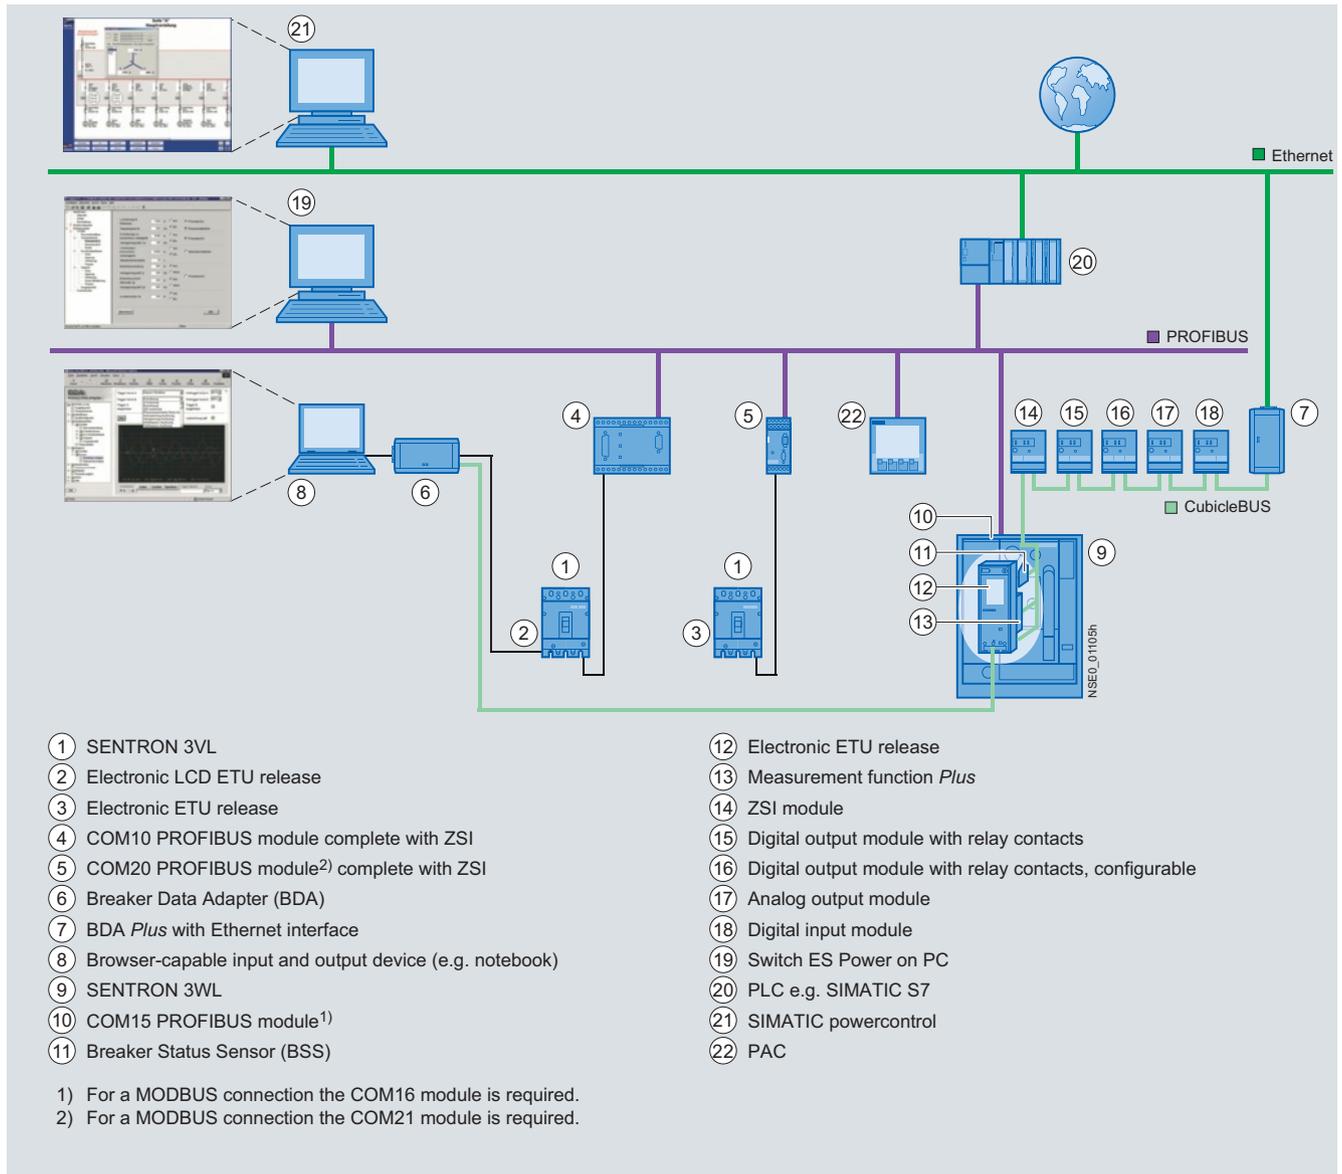
SENTRON 3WL:
Superior individual products integrated into uniform power distribution systems - up to and including industry-specific industrial and infrastructure solutions



- | | |
|---|---|
| ① Guide frame (pages 15/30 to 15/33) | ⑬ Transparent panel, function insert (page 15/35) |
| ② Main circuit connection front, flange, horizontal, vertical (pages 15/45 and 15/46) | ⑭ EMERGENCY-STOP pushbutton, key operated (page 15/38) |
| ③ Position indicator switch (pages 15/26 and 15/38) | ⑮ Motorized operating mechanism (page 15/40) |
| ④ Grounding contact, leading (page 15/42) | |
| ⑤ Shutter (page 15/41) | |
| ⑥ COM15 PROFIBUS module or COM16 MODBUS module (page 15/44) | |
| ⑦ External Cubicle BUS module (page 15/43) | |
| ⑧ Closing solenoid, auxiliary release (page 15/40) | |
| ⑨ Auxiliary conductor plug-in system (page 15/39) | |
| ⑩ Auxiliary switch block (page 15/40) | |
| ⑪ Door sealing frame (page 15/41) | |
| ⑫ Interlocking set for base plate (page 15/36) | |
| ⑬ Transparent panel, function insert (page 15/35) | |
| ⑭ EMERGENCY-STOP pushbutton, key operated (page 15/38) | |
| ⑮ Motorized operating mechanism (page 15/40) | |
| | ⑯ Remote reset solenoid (page 15/35) |
| | ⑰ Breaker Status Sensor (BSS) (page 15/44) |
| | ⑱ Protective device with device holder, electronic release (ETU) (page 15/34) |
| | ⑲ Remote reset solenoid (page 15/35) |
| | ⑳ Breaker Data Adapter (BDA) (page 15/43) |
| | ㉑ Four-line display (page 15/34) |
| | ㉒ Ground-fault protection module (page 15/34) |
| | ㉓ Rated current module (page 15/34) |
| | ㉔ Measuring function module (page 15/34) |
| | ㉕ Circuit breaker (pages 15/7 to 15/22) |

NSE0_01887/a

Communication-capable circuit breakers (with ETU45B or ETU76B electronic release)



Features

- Coordinated communication concept using the PROFIBUS DP or MODBUS, ranging from 16 A to 6300 A with SENTRON 3VL and SENTRON 3WL
- The high level of modularity of circuit breakers and accessories allows easy retrofitting of all communication components
- Significant additional benefits for the switchboard due to the possibility of linking up external input and output modules to the circuit breaker-internal **CubicleBUS** of the SENTRON 3VL
- Innovative software products for parameterization, operation, monitoring, and diagnostics of SENTRON circuit breakers, both locally or via PROFIBUS DP, MODBUS or Ethernet/ Intranet/Internet
- Complete integration of the SENTRON circuit breakers into the Totally Integrated Power and Totally Integrated Automation solutions

Communication:

- For air circuit breakers with optional communication function (ETU45B or ETU76B electronic release) see pages 15/7 to 15/22.
- For accessories see pages 15/43 and 15/44.
- For more information see also the chapter "Power Management System" and "Software for Power Distribution".

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

General data

Benefits

Low space requirements

The SENTRON 3WL devices require very little space. Size I devices (up to 1600 A) fit into a 400 mm wide switchgear panel. Size III devices (up to 6300 A) are the smallest of their kind and with their construction width of 704 mm fit into a 800 mm wide switchgear panel.

Modular design

Components like auxiliary releases, motorized operating mechanisms, electronic releases, current sensors, auxiliary circuit signaling switches, automatic reset devices, interlocks and engagement operating mechanisms can all be exchanged or retrofitted at a later stage, thus allowing the circuit breaker to be adapted to new, changing requirements.

The main contact elements can all be replaced in order to increase the endurance of the circuit breaker.

Retrofittable modules for electronic releases

Modularity is one of the main features of the new SENTRON 3WL circuit breakers.

Special LCDs, ground-fault modules, rated current modules and communication modules for the electronic releases are available for fast and easy retrofitting and adaptation to changing requirements.

Communication

The use of modern communication-capable circuit breakers opens up completely new possibilities in terms of start-up, parameterization, diagnostics, maintenance and operation. This allows many different ways of reducing costs and improving productivity in industrial plants, buildings and infrastructure projects to be achieved.

- Fast and reliable parameterization
- Timely information and response can prevent plant stoppages
- Effective diagnostics management
- Measured values are the basis for efficient load management, for drawing up power demand profiles and for assigning energy to cost centers
- Preventive maintenance reduces the risk of expansive plant down-times

Application

- As incoming-feeder, distribution, tie, and outgoing-feeder circuit breakers in electrical installations
- For switching and protecting motors, capacitors, generators, transformers, busbars and cables

Due to the reinforced use of electronic I&C systems, the demands made on air circuit breakers in terms of operator control and monitoring of network processes have increased.

The extensive, coordinated SENTRON range of devices covers all applications between 16 A and 6300 A with compact and air circuit breakers.

The AC devices are available as circuit breakers and non-automatic air circuit breakers. DC devices are only available as non-automatic air circuit breakers.

Standards

SENTRON 3WL circuit breakers comply with:

- IEC 60947-1, EN 60947-1
- IEC 60947-2, EN 60947-2
- Climate-proof according to IEC 60068-2-30.

Versions with UL 489 also available, [see Catalog LV 16](#).

For further standards, [see Appendix](#).

Conductor cross-sections

Size	I				II				
	Type	Up to 3WL11 10	3WL11 12	3WL11 16	3WL12 08	3WL12 10	3WL12 12	3WL12 16	3WL12 20
Permissible load At rear horizontal main circuit connections	• Up to 55 °C (Cu bare)	A 1000	1250	1600	800	1000	1250	1600	2000
	• Up to 60 °C (Cu bare) ¹⁾	A 1000	1250	1600	800	1000	1250	1600	2000
	• Up to 70 °C (Cu black painted) ¹⁾	A 1000	1210	1490	800	1000	1250	1600	2000
Main conductor minimum cross-sections	• Copper bars, bare	Unit(s) 1 × mm ² 60 × 10	2 × 40 × 10	2 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10
	• Copper bars, painted black	Unit(s) 1 × mm ² 60 × 10	2 × 40 × 10	2 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10

Size	II			III			
	Type	3WL12 25	3WL12 32	3WL12 40	3WL13 40	3WL13 50	3WL13 63
Permissible load	• Up to 55 °C (Cu bare)	A 2500	3200	3950	4000	5000	5920
	• Up to 60 °C (Cu bare) ¹⁾	A 2500	3020	3810	4000	5000	5810
	• Up to 70 °C (Cu black painted) ¹⁾	A 2280	2870	3600	4000	5000	5500
Main conductor minimum cross-sections	• Copper bars, bare	Unit(s) 2 × mm ² 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
	• Copper bars, painted black	Unit(s) 2 × mm ² 100 × 10	3 × 100 × 10	4 × 100 × 10 ²⁾	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10

1) ETU76B with graphics display can be used up to max. 55 °C.

2) Minimum main conductor cross-sections for 4-pole withdrawable circuit breakers: 4 × 120 × 10 mm.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, fixed-mounted versions

Selection and ordering data

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{CU} up to 55/66 kA at 500 V, ECO switching capacity N		(N)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.	
			kA	DT	Order No. For Order No. supplements, see page 15/23	Basic price per PU				
			A	A			kg			
Horizontal main circuit connection										
I	630	630	55	B	3WL11 06-2□□32-....		1	1 unit	103	43.000
I	800	800	55	B	3WL11 08-2□□32-....		1	1 unit	103	43.000
I	1000	1000	55	B	3WL11 10-2□□32-....		1	1 unit	103	43.000
I	1250	1250	55	B	3WL11 12-2□□32-....		1	1 unit	103	43.000
I	1600	1600	55	B	3WL11 16-2□□32-....		1	1 unit	103	43.000
II	800	800	66	B	3WL12 08-2□□32-....		1	1 unit	103	56.000
II	1000	1000	66	B	3WL12 10-2□□32-....		1	1 unit	103	56.000
II	1250	1250	66	B	3WL12 12-2□□32-....		1	1 unit	103	56.000
II	1600	1600	66	B	3WL12 16-2□□32-....		1	1 unit	103	56.000
II	2000	2000	66	B	3WL12 20-2□□32-....		1	1 unit	103	56.000
II	2500	2500	66	B	3WL12 25-2□□32-....		1	1 unit	103	59.000
II	3200	3200	66	B	3WL12 32-2□□32-....		1	1 unit	103	64.000
Vertical main circuit connection										
I	630	630	55	B	3WL11 06-2□□31-....		1	1 unit	103	43.000
I	800	800	55	B	3WL11 08-2□□31-....		1	1 unit	103	43.000
I	1000	1000	55	B	3WL11 10-2□□31-....		1	1 unit	103	43.000
I	1250	1250	55	B	3WL11 12-2□□31-....		1	1 unit	103	43.000
I	1600	1600	55	B	3WL11 16-2□□31-....		1	1 unit	103	43.000
II	800	800	66	B	3WL12 08-2□□31-....		1	1 unit	103	56.000
II	1000	1000	66	B	3WL12 10-2□□31-....		1	1 unit	103	56.000
II	1250	1250	66	B	3WL12 12-2□□31-....		1	1 unit	103	56.000
II	1600	1600	66	B	3WL12 16-2□□31-....		1	1 unit	103	56.000
II	2000	2000	66	B	3WL12 20-2□□31-....		1	1 unit	103	56.000
II	2500	2500	66	B	3WL12 25-2□□31-....		1	1 unit	103	59.000
II	3200	3200	66	B	3WL12 32-2□□31-....		1	1 unit	103	64.000
II	4000	4000	66	B	3WL12 40-2□□31-....		1	1 unit	103	85.000
Front main circuit connection, single hole										
I	630	630	55	B	3WL11 06-2□□33-....		1	1 unit	103	43.000
I	800	800	55	B	3WL11 08-2□□33-....		1	1 unit	103	43.000
I	1000	1000	55	B	3WL11 10-2□□33-....		1	1 unit	103	43.000
I	1250	1250	55	B	3WL11 12-2□□33-....		1	1 unit	103	43.000
I	1600	1600	55	B	3WL11 16-2□□33-....		1	1 unit	103	43.000
II	800	800	66	B	3WL12 08-2□□33-....		1	1 unit	103	56.000
II	1000	1000	66	B	3WL12 10-2□□33-....		1	1 unit	103	56.000
II	1250	1250	66	B	3WL12 12-2□□33-....		1	1 unit	103	56.000
II	1600	1600	66	B	3WL12 16-2□□33-....		1	1 unit	103	56.000
II	2000	2000	66	B	3WL12 20-2□□33-....		1	1 unit	103	56.000
II	2500	2500	66	B	3WL12 25-2□□33-....		1	1 unit	103	59.000
II	3200	3200	66	B	3WL12 32-2□□33-....		1	1 unit	103	64.000
Front main circuit connection, double hole										
I	630	630	55	B	3WL11 06-2□□34-....		1	1 unit	103	43.000
I	800	800	55	B	3WL11 08-2□□34-....		1	1 unit	103	43.000
I	1000	1000	55	B	3WL11 10-2□□34-....		1	1 unit	103	43.000
I	1250	1250	55	B	3WL11 12-2□□34-....		1	1 unit	103	43.000
I	1600	1600	55	B	3WL11 16-2□□34-....		1	1 unit	103	43.000
II	800	800	66	B	3WL12 08-2□□34-....		1	1 unit	103	56.000
II	1000	1000	66	B	3WL12 10-2□□34-....		1	1 unit	103	56.000
II	1250	1250	66	B	3WL12 12-2□□34-....		1	1 unit	103	56.000
II	1600	1600	66	B	3WL12 16-2□□34-....		1	1 unit	103	56.000
II	2000	2000	66	B	3WL12 20-2□□34-....		1	1 unit	103	56.000
II	2500	2500	66	B	3WL12 25-2□□34-....		1	1 unit	103	59.000
II	3200	3200	66	B	3WL12 32-2□□34-....		1	1 unit	103	64.000

Non-automatic air circuit breakers²⁾

Without electronic release

AA

Add. price
Without

Electronic releases

Versions without ground-fault protection

- ETU15B: Protection functions LI
- ETU25B: Protection functions LSI
- ETU45B: Protection functions LSIN³⁾
- ETU45B: Protection functions LSIN³⁾ with 4-line display
- ETU76B: Protection functions LSIN³⁾ with pixel graphics display

BB
CB
EB
FB
NB

Versions with ground-fault protection

- ETU27B: Protection functions LSING⁴⁾
- ETU45B: Protection functions LSING³⁾⁵⁾
- ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
- ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

DG
EG
FG
NG

Standard Order No. supplements (for further Order No. supplements, see page 15/23)

Manual operating mechanism with mechanical closing
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/10.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 66/80 kA at 500 V, standard switching capacity S		(S)	Basic price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	kA	DT			Order No. supplements, see page 15/23				kg
Horizontal main circuit connection										
I	630	630	66	B		3WL11 06-3□□32-....		1	1 unit	103 43.000
I	800	800	66	B		3WL11 08-3□□32-....		1	1 unit	103 43.000
I	1000	1000	66	B		3WL11 10-3□□32-....		1	1 unit	103 43.000
I	1250	1250	66	B		3WL11 12-3□□32-....		1	1 unit	103 43.000
I	1600	1600	66	B		3WL11 16-3□□32-....		1	1 unit	103 43.000
II	800	800	80	B		3WL12 08-3□□32-....		1	1 unit	103 56.000
II	1000	1000	80	B		3WL12 10-3□□32-....		1	1 unit	103 56.000
II	1250	1250	80	B		3WL12 12-3□□32-....		1	1 unit	103 56.000
II	1600	1600	80	B		3WL12 16-3□□32-....		1	1 unit	103 56.000
II	2000	2000	80	B		3WL12 20-3□□32-....		1	1 unit	103 56.000
II	2500	2500	80	B		3WL12 25-3□□32-....		1	1 unit	103 59.000
II	3200	3200	80	B		3WL12 32-3□□32-....		1	1 unit	103 64.000
Vertical main circuit connection										
I	630	630	66	B		3WL11 06-3□□31-....		1	1 unit	103 43.000
I	800	800	66	B		3WL11 08-3□□31-....		1	1 unit	103 43.000
I	1000	1000	66	B		3WL11 10-3□□31-....		1	1 unit	103 43.000
I	1250	1250	66	B		3WL11 12-3□□31-....		1	1 unit	103 43.000
I	1600	1600	66	B		3WL11 16-3□□31-....		1	1 unit	103 43.000
II	800	800	80	B		3WL12 08-3□□31-....		1	1 unit	103 56.000
II	1000	1000	80	B		3WL12 10-3□□31-....		1	1 unit	103 56.000
II	1250	1250	80	B		3WL12 12-3□□31-....		1	1 unit	103 56.000
II	1600	1600	80	B		3WL12 16-3□□31-....		1	1 unit	103 56.000
II	2000	2000	80	B		3WL12 20-3□□31-....		1	1 unit	103 56.000
II	2500	2500	80	B		3WL12 25-3□□31-....		1	1 unit	103 59.000
II	3200	3200	80	B		3WL12 32-3□□31-....		1	1 unit	103 64.000
II	4000	4000	80	B		3WL12 40-3□□31-....		1	1 unit	103 85.000
Front main circuit connection, single hole										
I	630	630	66	B		3WL11 06-3□□33-....		1	1 unit	103 43.000
I	800	800	66	B		3WL11 08-3□□33-....		1	1 unit	103 43.000
I	1000	1000	66	B		3WL11 10-3□□33-....		1	1 unit	103 43.000
I	1250	1250	66	B		3WL11 12-3□□33-....		1	1 unit	103 43.000
I	1600	1600	66	B		3WL11 16-3□□33-....		1	1 unit	103 43.000
II	800	800	80	B		3WL12 08-3□□33-....		1	1 unit	103 56.000
II	1000	1000	80	B		3WL12 10-3□□33-....		1	1 unit	103 56.000
II	1250	1250	80	B		3WL12 12-3□□33-....		1	1 unit	103 56.000
II	1600	1600	80	B		3WL12 16-3□□33-....		1	1 unit	103 56.000
II	2000	2000	80	B		3WL12 20-3□□33-....		1	1 unit	103 56.000
II	2500	2500	80	B		3WL12 25-3□□33-....		1	1 unit	103 59.000
II	3200	3200	80	B		3WL12 32-3□□33-....		1	1 unit	103 64.000
Front main circuit connection, double hole										
I	630	630	66	B		3WL11 06-3□□34-....		1	1 unit	103 43.000
I	800	800	66	B		3WL11 08-3□□34-....		1	1 unit	103 43.000
I	1000	1000	66	B		3WL11 10-3□□34-....		1	1 unit	103 43.000
I	1250	1250	66	B		3WL11 12-3□□34-....		1	1 unit	103 43.000
I	1600	1600	66	B		3WL11 16-3□□34-....		1	1 unit	103 43.000
II	800	800	80	B		3WL12 08-3□□34-....		1	1 unit	103 56.000
II	1000	1000	80	B		3WL12 10-3□□34-....		1	1 unit	103 56.000
II	1250	1250	80	B		3WL12 12-3□□34-....		1	1 unit	103 56.000
II	1600	1600	80	B		3WL12 16-3□□34-....		1	1 unit	103 56.000
II	2000	2000	80	B		3WL12 20-3□□34-....		1	1 unit	103 56.000
II	2500	2500	80	B		3WL12 25-3□□34-....		1	1 unit	103 59.000
II	3200	3200	80	B		3WL12 32-3□□34-....		1	1 unit	103 64.000
Non-automatic air circuit breakers²⁾										
Without electronic release						AA	Additional price	Without		
Electronic releases										
Versions without ground-fault protection										
ETU15B: Protection functions LI										
ETU25B: Protection functions LSI										
ETU45B: Protection functions LSING ³⁾										
ETU45B: Protection functions LSING ³⁾ with 4-line display										
ETU76B: Protection functions LSING ³⁾ with pixel graphics display										
Versions with ground-fault protection										
ETU27B: Protection functions LSING ⁴⁾										
ETU45B: Protection functions LSING ³⁾⁵⁾										
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display										
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display										
Standard Order No. supplements (for further Order No. supplements, see page 15/23)										
Manual operating mechanism with mechanical closing						1AA2	Additional price	Without		
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO										

For footnotes see page 15/10.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 100 kA at 500 V, high switching capacity H		Ⓜ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
			Order No.	Order No. supplements, see page 15/23					
A	A	kA	DT						
Horizontal main circuit connection									
II	800	800	100	B	3WL12 08-4□□32-....		1	1 unit	103 56.000
II	1000	1000	100	B	3WL12 10-4□□32-....		1	1 unit	103 56.000
II	1250	1250	100	B	3WL12 12-4□□32-....		1	1 unit	103 56.000
II	1600	1600	100	B	3WL12 16-4□□32-....		1	1 unit	103 56.000
II	2000	2000	100	B	3WL12 20-4□□32-....		1	1 unit	103 56.000
II	2500	2500	100	B	3WL12 25-4□□32-....		1	1 unit	103 59.000
II	3200	3200	100	B	3WL12 32-4□□32-....		1	1 unit	103 64.000
III	4000	4000	100	B	3WL13 40-4□□32-....		1	1 unit	103 82.000
III	5000	5000	100	B	3WL13 50-4□□32-....		1	1 unit	103 82.000
Vertical main circuit connection									
II	800	800	100	B	3WL12 08-4□□31-....		1	1 unit	103 56.000
II	1000	1000	100	B	3WL12 10-4□□31-....		1	1 unit	103 56.000
II	1250	1250	100	B	3WL12 12-4□□31-....		1	1 unit	103 56.000
II	1600	1600	100	B	3WL12 16-4□□31-....		1	1 unit	103 56.000
II	2000	2000	100	B	3WL12 20-4□□31-....		1	1 unit	103 56.000
II	2500	2500	100	B	3WL12 25-4□□31-....		1	1 unit	103 59.000
II	3200	3200	100	B	3WL12 32-4□□31-....		1	1 unit	103 64.000
II	4000	4000	100	B	3WL12 40-4□□31-....		1	1 unit	103 85.000
III	4000	4000	100	B	3WL13 40-4□□31-....		1	1 unit	103 82.000
III	5000	5000	100	B	3WL13 50-4□□31-....		1	1 unit	103 82.000
III	6300	6300	100	B	3WL13 63-4□□31-....		1	1 unit	103 90.000
Front main circuit connection, single hole									
II	800	800	100	B	3WL12 08-4□□33-....		1	1 unit	103 56.000
II	1000	1000	100	B	3WL12 10-4□□33-....		1	1 unit	103 56.000
II	1250	1250	100	B	3WL12 12-4□□33-....		1	1 unit	103 56.000
II	1600	1600	100	B	3WL12 16-4□□33-....		1	1 unit	103 56.000
II	2000	2000	100	B	3WL12 20-4□□33-....		1	1 unit	103 56.000
II	2500	2500	100	B	3WL12 25-4□□33-....		1	1 unit	103 59.000
II	3200	3200	100	B	3WL12 32-4□□33-....		1	1 unit	103 64.000
III	4000	4000	100	B	3WL13 40-4□□33-....		1	1 unit	103 82.000
Front main circuit connection, double hole									
II	800	800	100	B	3WL12 08-4□□34-....		1	1 unit	103 56.000
II	1000	1000	100	B	3WL12 10-4□□34-....		1	1 unit	103 56.000
II	1250	1250	100	B	3WL12 12-4□□34-....		1	1 unit	103 56.000
II	1600	1600	100	B	3WL12 16-4□□34-....		1	1 unit	103 56.000
II	2000	2000	100	B	3WL12 20-4□□34-....		1	1 unit	103 56.000
II	2500	2500	100	B	3WL12 25-4□□34-....		1	1 unit	103 59.000
II	3200	3200	100	B	3WL12 32-4□□34-....		1	1 unit	103 64.000
III	4000	4000	100	B	3WL13 40-4□□34-....		1	1 unit	103 82.000
Non-automatic air circuit breakers²⁾									
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					BB				
ETU15B: Protection functions L ⁽⁶⁾					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ⁽³⁾					FB				
ETU76B: Protection functions LSIN ⁽³⁾ with pixel graphics display					NB				
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁽⁴⁾					EG				
ETU45B: Protection functions LSING ⁽³⁾⁽⁵⁾					FG				
ETU76B: Protection functions LSING ⁽³⁾⁽⁵⁾ with pixel graphics display					NG				
Standard Order No. supplements (for further Order No. supplements, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

For footnotes see page 15/10.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 150 kA at 500 V, very high switching capacity C		Ⓒ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.	
A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU				kg	
Horizontal main circuit connection										
III	4000	4000	150	B	3WL13 40-5□□32-....		1	1 unit	103	82.000
III	5000	5000	150	B	3WL13 50-5□□32-....		1	1 unit	103	82.000
Vertical main circuit connection										
III	4000	4000	150	B	3WL13 40-5□□31-....		1	1 unit	103	82.000
III	5000	5000	150	B	3WL13 50-5□□31-....		1	1 unit	103	82.000
III	6300	6300	150	B	3WL13 63-5□□31-....		1	1 unit	103	90.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price				
Without electronic release					AA	Without				
Electronic releases										
Versions without ground-fault protection					CB					
ETU25B: Protection functions LSI					EB					
ETU45B: Protection functions LSIN ³⁾					FB					
ETU45B: Protection functions LSIN ³⁾ with 4-line display					NB					
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display										
Versions with ground-fault protection					DG					
ETU27B: Protection functions LSING ⁴⁾					EG					
ETU45B: Protection functions LSING ³⁾⁵⁾					FG					
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display					NG					
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display										
Standard Order No. supplements (for further Order No. supplements, see page 15/23)										
Manual operating mechanism with mechanical closing					1AA2					
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO						Without				

Footnotes for pages 15/7 to 15/10:

- The rated current is determined by the rated current module. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 15/24.
- For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see Technical Information LV 1T, "Technical specifications".

- Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 15/34.
- Current transformers for protection of the N conductor are to be ordered separately, see page 15/34.
- ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 15/34.
- ETU15B cannot be used with 3WL circuit breakers, size III.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, withdrawable versions

Selection and ordering data

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{CU} up to 55/66 kA at 500 V, ECO switching capacity N		(N)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	KA	DT	Order No.	Basic price per PU				kg
				For Order No. supplements, see page 15/23					
Without guide frames (for guide frames, see page 15/30 to 15/33)									
I	630	630	55	B	3WL11 06-2□□35-....		1	1 unit	103 45.000
I	800	800	55	B	3WL11 08-2□□35-....		1	1 unit	103 45.000
I	1000	1000	55	B	3WL11 10-2□□35-....		1	1 unit	103 45.000
I	1250	1250	55	B	3WL11 12-2□□35-....		1	1 unit	103 45.000
I	1600	1600	55	B	3WL11 16-2□□35-....		1	1 unit	103 45.000
II	800	800	66	B	3WL12 08-2□□35-....		1	1 unit	103 60.000
II	1000	1000	66	B	3WL12 10-2□□35-....		1	1 unit	103 60.000
II	1250	1250	66	B	3WL12 12-2□□35-....		1	1 unit	103 60.000
II	1600	1600	66	B	3WL12 16-2□□35-....		1	1 unit	103 60.000
II	2000	2000	66	B	3WL12 20-2□□35-....		1	1 unit	103 60.000
II	2500	2500	66	B	3WL12 25-2□□35-....		1	1 unit	103 63.000
II	3200	3200	66	B	3WL12 32-2□□35-....		1	1 unit	103 68.000
With guide frames, horizontal main circuit connection									
I	630	630	55	B	3WL11 06-2□□36-....		1	1 unit	103 70.000
I	800	800	55	B	3WL11 08-2□□36-....		1	1 unit	103 70.000
I	1000	1000	55	B	3WL11 10-2□□36-....		1	1 unit	103 70.000
I	1250	1250	55	B	3WL11 12-2□□36-....		1	1 unit	103 70.000
I	1600	1600	55	B	3WL11 16-2□□36-....		1	1 unit	103 70.000
II	800	800	66	B	3WL12 08-2□□36-....		1	1 unit	103 91.000
II	1000	1000	66	B	3WL12 10-2□□36-....		1	1 unit	103 91.000
II	1250	1250	66	B	3WL12 12-2□□36-....		1	1 unit	103 91.000
II	1600	1600	66	B	3WL12 16-2□□36-....		1	1 unit	103 91.000
II	2000	2000	66	B	3WL12 20-2□□36-....		1	1 unit	103 91.000
II	2500	2500	66	B	3WL12 25-2□□36-....		1	1 unit	103 102.000
II	3200	3200	66	B	3WL12 32-2□□36-....		1	1 unit	103 113.000
With guide frames, vertical main circuit connection									
I	630	630	55	B	3WL11 06-2□□37-....		1	1 unit	103 70.000
I	800	800	55	B	3WL11 08-2□□37-....		1	1 unit	103 70.000
I	1000	1000	55	B	3WL11 10-2□□37-....		1	1 unit	103 70.000
I	1250	1250	55	B	3WL11 12-2□□37-....		1	1 unit	103 70.000
I	1600	1600	55	B	3WL11 16-2□□37-....		1	1 unit	103 70.000
II	800	800	66	B	3WL12 08-2□□37-....		1	1 unit	103 91.000
II	1000	1000	66	B	3WL12 10-2□□37-....		1	1 unit	103 91.000
II	1250	1250	66	B	3WL12 12-2□□37-....		1	1 unit	103 91.000
II	1600	1600	66	B	3WL12 16-2□□37-....		1	1 unit	103 91.000
II	2000	2000	66	B	3WL12 20-2□□37-....		1	1 unit	103 91.000
II	2500	2500	66	B	3WL12 25-2□□37-....		1	1 unit	103 102.000
II	3200	3200	66	B	3WL12 32-2□□37-....		1	1 unit	103 113.000
II	4000	4000	66	B	3WL12 40-2□□37-....		1	1 unit	103 121.000
With guide frames, connecting flanges									
I	630	630	55	B	3WL11 06-2□□38-....		1	1 unit	103 70.000
I	800	800	55	B	3WL11 08-2□□38-....		1	1 unit	103 70.000
I	1000	1000	55	B	3WL11 10-2□□38-....		1	1 unit	103 70.000
I	1250	1250	55	B	3WL11 12-2□□38-....		1	1 unit	103 70.000
I	1600	1600	55	B	3WL11 16-2□□38-....		1	1 unit	103 70.000
II	800	800	66	B	3WL12 08-2□□38-....		1	1 unit	103 91.000
II	1000	1000	66	B	3WL12 10-2□□38-....		1	1 unit	103 91.000
II	1250	1250	66	B	3WL12 12-2□□38-....		1	1 unit	103 91.000
II	1600	1600	66	B	3WL12 16-2□□38-....		1	1 unit	103 91.000
II	2000	2000	66	B	3WL12 20-2□□38-....		1	1 unit	103 91.000
II	2500	2500	66	B	3WL12 25-2□□38-....		1	1 unit	103 102.000
II	3200	3200	66	B	3WL12 32-2□□38-....		1	1 unit	103 113.000

Non-automatic air circuit breakers²⁾

Without electronic release

Order No. supplements	Additional price
AA	Without
BB	
CB	
EB	
FB	
NB	
DG	
EG	
FG	
NG	

Electronic releases

Versions without ground-fault protection

- ETU15B: Protection functions LI
- ETU25B: Protection functions LSI
- ETU45B: Protection functions LSIN³⁾
- ETU45B: Protection functions LSIN³⁾ with 4-line display
- ETU76B: Protection functions LSIN³⁾ with pixel graphics display

Versions with ground-fault protection

- ETU27B: Protection functions LSING⁴⁾
- ETU45B: Protection functions LSING³⁾⁵⁾
- ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
- ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)

Manual operating mechanism with mechanical closing
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/14.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 66/80 kA at 500 V, standard switching capacity S		(S)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. For Order No. supplements, see page 15/23	Basic price per PU			kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
I	630	630	66	B	3WL11 06-3□□35-....		1	1 unit	103 45.000
I	800	800	66	B	3WL11 08-3□□35-....		1	1 unit	103 45.000
I	1000	1000	66	B	3WL11 10-3□□35-....		1	1 unit	103 45.000
I	1250	1250	66	B	3WL11 12-3□□35-....		1	1 unit	103 45.000
I	1600	1600	66	B	3WL11 16-3□□35-....		1	1 unit	103 45.000
II	800	800	80	B	3WL12 08-3□□35-....		1	1 unit	103 60.000
II	1000	1000	80	B	3WL12 10-3□□35-....		1	1 unit	103 60.000
II	1250	1250	80	B	3WL12 12-3□□35-....		1	1 unit	103 60.000
II	1600	1600	80	B	3WL12 16-3□□35-....		1	1 unit	103 60.000
II	2000	2000	80	B	3WL12 20-3□□35-....		1	1 unit	103 60.000
II	2500	2500	80	B	3WL12 25-3□□35-....		1	1 unit	103 63.000
II	3200	3200	80	B	3WL12 32-3□□35-....		1	1 unit	103 68.000
With guide frames, horizontal main circuit connection									
I	630	630	66	B	3WL11 06-3□□36-....		1	1 unit	103 70.000
I	800	800	66	B	3WL11 08-3□□36-....		1	1 unit	103 70.000
I	1000	1000	66	B	3WL11 10-3□□36-....		1	1 unit	103 70.000
I	1250	1250	66	B	3WL11 12-3□□36-....		1	1 unit	103 70.000
I	1600	1600	66	B	3WL11 16-3□□36-....		1	1 unit	103 70.000
II	800	800	80	B	3WL12 08-3□□36-....		1	1 unit	103 91.000
II	1000	1000	80	B	3WL12 10-3□□36-....		1	1 unit	103 91.000
II	1250	1250	80	B	3WL12 12-3□□36-....		1	1 unit	103 91.000
II	1600	1600	80	B	3WL12 16-3□□36-....		1	1 unit	103 91.000
II	2000	2000	80	B	3WL12 20-3□□36-....		1	1 unit	103 91.000
II	2500	2500	80	B	3WL12 25-3□□36-....		1	1 unit	103 102.000
II	3200	3200	80	B	3WL12 32-3□□36-....		1	1 unit	103 113.000
With guide frames, vertical main circuit connection									
I	630	630	66	B	3WL11 06-3□□37-....		1	1 unit	103 70.000
I	800	800	66	B	3WL11 08-3□□37-....		1	1 unit	103 70.000
I	1000	1000	66	B	3WL11 10-3□□37-....		1	1 unit	103 70.000
I	1250	1250	66	B	3WL11 12-3□□37-....		1	1 unit	103 70.000
I	1600	1600	66	B	3WL11 16-3□□37-....		1	1 unit	103 70.000
II	800	800	80	B	3WL12 08-3□□37-....		1	1 unit	103 91.000
II	1000	1000	80	B	3WL12 10-3□□37-....		1	1 unit	103 91.000
II	1250	1250	80	B	3WL12 12-3□□37-....		1	1 unit	103 91.000
II	1600	1600	80	B	3WL12 16-3□□37-....		1	1 unit	103 91.000
II	2000	2000	80	B	3WL12 20-3□□37-....		1	1 unit	103 91.000
II	2500	2500	80	B	3WL12 25-3□□37-....		1	1 unit	103 102.000
II	3200	3200	80	B	3WL12 32-3□□37-....		1	1 unit	103 113.000
II	4000	4000	80	B	3WL12 40-3□□37-....		1	1 unit	103 121.000
With guide frames, connecting flanges									
I	630	630	66	B	3WL11 06-3□□38-....		1	1 unit	103 70.000
I	800	800	66	B	3WL11 08-3□□38-....		1	1 unit	103 70.000
I	1000	1000	66	B	3WL11 10-3□□38-....		1	1 unit	103 70.000
I	1250	1250	66	B	3WL11 12-3□□38-....		1	1 unit	103 70.000
I	1600	1600	66	B	3WL11 16-3□□38-....		1	1 unit	103 70.000
II	800	800	80	B	3WL12 08-3□□38-....		1	1 unit	103 91.000
II	1000	1000	80	B	3WL12 10-3□□38-....		1	1 unit	103 91.000
II	1250	1250	80	B	3WL12 12-3□□38-....		1	1 unit	103 91.000
II	1600	1600	80	B	3WL12 16-3□□38-....		1	1 unit	103 91.000
II	2000	2000	80	B	3WL12 20-3□□38-....		1	1 unit	103 91.000
II	2500	2500	80	B	3WL12 25-3□□38-....		1	1 unit	103 102.000
II	3200	3200	80	B	3WL12 32-3□□38-....		1	1 unit	103 113.000

Non-automatic air circuit breakers²⁾

Without electronic release

AA

Additional
price
Without

Electronic releases

Versions without ground-fault protection

ETU15B: Protection functions LI
ETU25B: Protection functions LSI
ETU45B: Protection functions LSIN³⁾
ETU45B: Protection functions LSIN³⁾ with 4-line display
ETU76B: Protection functions LSIN³⁾ with pixel graphics display

BB
CB
EB
FB
NB

Versions with ground-fault protection

ETU27B: Protection functions LSING⁴⁾
ETU45B: Protection functions LSING³⁾⁵⁾
ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

DG
EG
FG
NG

Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)

Manual operating mechanism with mechanical closing
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/14.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, withdrawable versions

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	I_{cu} up to 100 kA at 500 V, high switching capacity H		(H)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
II	800	800	100	B	3WL12 08-4□□35-....		1	1 unit	103 60.000
II	1000	1000	100	B	3WL12 10-4□□35-....		1	1 unit	103 60.000
II	1250	1250	100	B	3WL12 12-4□□35-....		1	1 unit	103 60.000
II	1600	1600	100	B	3WL12 16-4□□35-....		1	1 unit	103 60.000
II	2000	2000	100	B	3WL12 20-4□□35-....		1	1 unit	103 60.000
II	2500	2500	100	B	3WL12 25-4□□35-....		1	1 unit	103 63.000
II	3200	3200	100	B	3WL12 32-4□□35-....		1	1 unit	103 68.000
III	4000	4000	100	B	3WL13 40-4□□35-....		1	1 unit	103 88.000
III	5000	5000	100	B	3WL13 50-4□□35-....		1	1 unit	103 88.000
III	6300	6300	100	B	3WL13 63-4□□35-....		1	1 unit	103 96.000
With guide frames, horizontal main circuit connection									
II	800	800	100	B	3WL12 08-4□□36-....		1	1 unit	103 91.000
II	1000	1000	100	B	3WL12 10-4□□36-....		1	1 unit	103 91.000
II	1250	1250	100	B	3WL12 12-4□□36-....		1	1 unit	103 91.000
II	1600	1600	100	B	3WL12 16-4□□36-....		1	1 unit	103 91.000
II	2000	2000	100	B	3WL12 20-4□□36-....		1	1 unit	103 91.000
II	2500	2500	100	B	3WL12 25-4□□36-....		1	1 unit	103 102.000
II	3200	3200	100	B	3WL12 32-4□□36-....		1	1 unit	103 113.000
III	4000	4000	100	B	3WL13 40-4□□36-....		1	1 unit	103 148.000
III	5000	5000	100	B	3WL13 50-4□□36-....		1	1 unit	103 148.000
With guide frames, vertical main circuit connection									
II	800	800	100	B	3WL12 08-4□□37-....		1	1 unit	103 91.000
II	1000	1000	100	B	3WL12 10-4□□37-....		1	1 unit	103 91.000
II	1250	1250	100	B	3WL12 12-4□□37-....		1	1 unit	103 91.000
II	1600	1600	100	B	3WL12 16-4□□37-....		1	1 unit	103 91.000
II	2000	2000	100	B	3WL12 20-4□□37-....		1	1 unit	103 91.000
II	2500	2500	100	B	3WL12 25-4□□37-....		1	1 unit	103 102.000
II	3200	3200	100	B	3WL12 32-4□□37-....		1	1 unit	103 113.000
II	4000	4000	100	B	3WL12 40-4□□37-....		1	1 unit	103 121.000
III	4000	4000	100	B	3WL13 40-4□□37-....		1	1 unit	103 148.000
III	5000	5000	100	B	3WL13 50-4□□37-....		1	1 unit	103 148.000
III	6300	6300	100	B	3WL13 63-4□□37-....		1	1 unit	103 166.000
With guide frames, connecting flanges									
II	800	800	100	B	3WL12 08-4□□38-....		1	1 unit	103 91.000
II	1000	1000	100	B	3WL12 10-4□□38-....		1	1 unit	103 91.000
II	1250	1250	100	B	3WL12 12-4□□38-....		1	1 unit	103 91.000
II	1600	1600	100	B	3WL12 16-4□□38-....		1	1 unit	103 91.000
II	2000	2000	100	B	3WL12 20-4□□38-....		1	1 unit	103 91.000
II	2500	2500	100	B	3WL12 25-4□□38-....		1	1 unit	103 102.000
II	3200	3200	100	B	3WL12 32-4□□38-....		1	1 unit	103 113.000
III	4000	4000	100	B	3WL13 40-4□□38-....		1	1 unit	103 148.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price			
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					BB				
ETU15B: Protection functions L ⁽⁶⁾					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ⁽³⁾					FB				
ETU45B: Protection functions LSIN ⁽³⁾ with 4-line display					NB				
ETU76B: Protection functions LSIN ⁽³⁾ with pixel graphics display									
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁽⁴⁾					EG				
ETU45B: Protection functions LSING ⁽³⁾⁽⁵⁾					FG				
ETU45B: Protection functions LSING ⁽³⁾⁽⁵⁾ with 4-line display					NG				
ETU76B: Protection functions LSING ⁽³⁾⁽⁵⁾ with pixel graphics display									
Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

For footnotes see page 15/14.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

3-pole, withdrawable versions

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	I_{cu} up to 150 kA at 500 V, very high switching capacity C		Ⓒ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU				kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
III	4000	4000	150	B	3WL13 40-5□□35-....		1	1 unit	103 88.000
III	5000	5000	150	B	3WL13 50-5□□35-....		1	1 unit	103 88.000
III	6300	6300	150	B	3WL13 63-5□□35-....		1	1 unit	103 96.000
With guide frames, horizontal main circuit connection									
III	4000	4000	150	B	3WL13 40-5□□36-....		1	1 unit	103 148.000
III	5000	5000	150	B	3WL13 50-5□□36-....		1	1 unit	103 148.000
With guide frames, vertical main circuit connection									
III	4000	4000	150	B	3WL13 40-5□□37-....		1	1 unit	103 148.000
III	5000	5000	150	B	3WL13 50-5□□37-....		1	1 unit	103 148.000
III	6300	6300	150	B	3WL13 63-5□□37-....		1	1 unit	103 166.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price			
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection									
ETU25B: Protection functions LSI									
ETU45B: Protection functions LSIN ³⁾									
ETU45B: Protection functions LSIN ³⁾ with 4-line display									
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display									
Versions with ground-fault protection									
ETU27B: Protection functions LSING ⁴⁾									
ETU45B: Protection functions LSING ³⁾⁵⁾									
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display									
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display									
Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)									
Manual operating mechanism with mechanical closing									
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO					1AA2	Without			

Footnotes for pages 15/11 to 15/14:

- 1) The rated current is determined by the rated current module. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 15/24.
- 2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see Technical Information LV 1T, "Technical specifications".

- 3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 15/34.
- 4) Current transformers for protection of the N conductor are to be ordered separately, see page 15/34.
- 5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 15/34.
- 6) ETU15B cannot be used with 3WL circuit breakers, size III.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, fixed-mounted versions

Selection and ordering data

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{CU} up to 55/66 kA at 500 V, ECO switching capacity N		(N)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU				kg
Horizontal main circuit connection									
I	630	630	55	B	3WL11 06-2□□42-....		1	1 unit	103 50.000
I	800	800	55	B	3WL11 08-2□□42-....		1	1 unit	103 50.000
I	1000	1000	55	B	3WL11 10-2□□42-....		1	1 unit	103 50.000
I	1250	1250	55	B	3WL11 12-2□□42-....		1	1 unit	103 50.000
I	1600	1600	55	B	3WL11 16-2□□42-....		1	1 unit	103 50.000
II	800	800	66	B	3WL12 08-2□□42-....		1	1 unit	103 67.000
II	1000	1000	66	B	3WL12 10-2□□42-....		1	1 unit	103 67.000
II	1250	1250	66	B	3WL12 12-2□□42-....		1	1 unit	103 67.000
II	1600	1600	66	B	3WL12 16-2□□42-....		1	1 unit	103 67.000
II	2000	2000	66	B	3WL12 20-2□□42-....		1	1 unit	103 67.000
II	2500	2500	66	B	3WL12 25-2□□42-....		1	1 unit	103 71.000
II	3200	3200	66	B	3WL12 32-2□□42-....		1	1 unit	103 77.000
Vertical main circuit connection									
I	630	630	55	B	3WL11 06-2□□41-....		1	1 unit	103 50.000
I	800	800	55	B	3WL11 08-2□□41-....		1	1 unit	103 50.000
I	1000	1000	55	B	3WL11 10-2□□41-....		1	1 unit	103 50.000
I	1250	1250	55	B	3WL11 12-2□□41-....		1	1 unit	103 50.000
I	1600	1600	55	B	3WL11 16-2□□41-....		1	1 unit	103 50.000
II	800	800	66	B	3WL12 08-2□□41-....		1	1 unit	103 75.000
II	1000	1000	66	B	3WL12 10-2□□41-....		1	1 unit	103 75.000
II	1250	1250	66	B	3WL12 12-2□□41-....		1	1 unit	103 75.000
II	1600	1600	66	B	3WL12 16-2□□41-....		1	1 unit	103 75.000
II	2000	2000	66	B	3WL12 20-2□□41-....		1	1 unit	103 67.000
II	2500	2500	66	B	3WL12 25-2□□41-....		1	1 unit	103 71.000
II	3200	3200	66	B	3WL12 32-2□□41-....		1	1 unit	103 77.000
II	4000	4000	66	B	3WL12 40-2□□41-....		1	1 unit	103 103.000
Front main circuit connection, single hole									
I	630	630	55	B	3WL11 06-2□□43-....		1	1 unit	103 50.000
I	800	800	55	B	3WL11 08-2□□43-....		1	1 unit	103 50.000
I	1000	1000	55	B	3WL11 10-2□□43-....		1	1 unit	103 50.000
I	1250	1250	55	B	3WL11 12-2□□43-....		1	1 unit	103 50.000
I	1600	1600	55	B	3WL11 16-2□□43-....		1	1 unit	103 50.000
II	800	800	66	B	3WL12 08-2□□43-....		1	1 unit	103 67.000
II	1000	1000	66	B	3WL12 10-2□□43-....		1	1 unit	103 67.000
II	1250	1250	66	B	3WL12 12-2□□43-....		1	1 unit	103 67.000
II	1600	1600	66	B	3WL12 16-2□□43-....		1	1 unit	103 67.000
II	2000	2000	66	B	3WL12 20-2□□43-....		1	1 unit	103 67.000
II	2500	2500	66	B	3WL12 25-2□□43-....		1	1 unit	103 71.000
II	3200	3200	66	B	3WL12 32-2□□43-....		1	1 unit	103 77.000
Front main circuit connection, double hole									
I	630	630	55	B	3WL11 06-2□□44-....		1	1 unit	103 50.000
I	800	800	55	B	3WL11 08-2□□44-....		1	1 unit	103 50.000
I	1000	1000	55	B	3WL11 10-2□□44-....		1	1 unit	103 50.000
I	1250	1250	55	B	3WL11 12-2□□44-....		1	1 unit	103 50.000
I	1600	1600	55	B	3WL11 16-2□□44-....		1	1 unit	103 50.000
II	800	800	66	B	3WL12 08-2□□44-....		1	1 unit	103 67.000
II	1000	1000	66	B	3WL12 10-2□□44-....		1	1 unit	103 67.000
II	1250	1250	66	B	3WL12 12-2□□44-....		1	1 unit	103 67.000
II	1600	1600	66	B	3WL12 16-2□□44-....		1	1 unit	103 67.000
II	2000	2000	66	B	3WL12 20-2□□44-....		1	1 unit	103 67.000
II	2500	2500	66	B	3WL12 25-2□□44-....		1	1 unit	103 71.000
II	3200	3200	66	B	3WL12 32-2□□44-....		1	1 unit	103 77.000

Non-automatic air circuit breakers²⁾

Without electronic release

AA

Additional price
Without

Electronic releases

Versions without ground-fault protection

- ETU15B: Protection functions LI
- ETU25B: Protection functions LSI
- ETU45B: Protection functions LSIN³⁾
- ETU45B: Protection functions LSIN³⁾ with 4-line display
- ETU76B: Protection functions LSIN³⁾ with pixel graphics display

BB
CB
EB
FB
NB

Versions with ground-fault protection

- ETU27B: Protection functions LSING⁴⁾
- ETU45B: Protection functions LSING³⁾⁵⁾
- ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
- ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

DG
EG
FG
NG

Standard Order No. supplements (for further Order No. supplements, see page 15/23)

Manual operating mechanism with mechanical closing
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/18.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current $I_{n \max}$	Rated current ¹⁾ I_n	I_{cu} up to 66/80 kA at 500 V, standard switching capacity S		(S)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Horizontal main circuit connection									
I	630	630	66	B	3WL11 06-3□□42-....		1	1 unit	103 50.000
I	800	800	66	B	3WL11 08-3□□42-....		1	1 unit	103 50.000
I	1000	1000	66	B	3WL11 10-3□□42-....		1	1 unit	103 50.000
I	1250	1250	66	B	3WL11 12-3□□42-....		1	1 unit	103 50.000
I	1600	1600	66	B	3WL11 16-3□□42-....		1	1 unit	103 50.000
II	800	800	80	B	3WL12 08-3□□42-....		1	1 unit	103 67.000
II	1000	1000	80	B	3WL12 10-3□□42-....		1	1 unit	103 67.000
II	1250	1250	80	B	3WL12 12-3□□42-....		1	1 unit	103 67.000
II	1600	1600	80	B	3WL12 16-3□□42-....		1	1 unit	103 67.000
II	2000	2000	80	B	3WL12 20-3□□42-....		1	1 unit	103 67.000
II	2500	2500	80	B	3WL12 25-3□□42-....		1	1 unit	103 71.000
II	3200	3200	80	B	3WL12 32-3□□42-....		1	1 unit	103 77.000
Vertical main circuit connection									
I	630	630	66	B	3WL11 06-3□□41-....		1	1 unit	103 50.000
I	800	800	66	B	3WL11 08-3□□41-....		1	1 unit	103 50.000
I	1000	1000	66	B	3WL11 10-3□□41-....		1	1 unit	103 50.000
I	1250	1250	66	B	3WL11 12-3□□41-....		1	1 unit	103 50.000
I	1600	1600	66	B	3WL11 16-3□□41-....		1	1 unit	103 50.000
II	800	800	80	B	3WL12 08-3□□41-....		1	1 unit	103 67.000
II	1000	1000	80	B	3WL12 10-3□□41-....		1	1 unit	103 67.000
II	1250	1250	80	B	3WL12 12-3□□41-....		1	1 unit	103 67.000
II	1600	1600	80	B	3WL12 16-3□□41-....		1	1 unit	103 67.000
II	2000	2000	80	B	3WL12 20-3□□41-....		1	1 unit	103 67.000
II	2500	2500	80	B	3WL12 25-3□□41-....		1	1 unit	103 71.000
II	3200	3200	80	B	3WL12 32-3□□41-....		1	1 unit	103 77.000
II	4000	4000	80	B	3WL12 40-3□□41-....		1	1 unit	103 103.000
Front main circuit connection, single hole									
I	630	630	66	B	3WL11 06-3□□43-....		1	1 unit	103 50.000
I	800	800	66	B	3WL11 08-3□□43-....		1	1 unit	103 50.000
I	1000	1000	66	B	3WL11 10-3□□43-....		1	1 unit	103 50.000
I	1250	1250	66	B	3WL11 12-3□□43-....		1	1 unit	103 50.000
I	1600	1600	66	B	3WL11 16-3□□43-....		1	1 unit	103 50.000
II	800	800	80	B	3WL12 08-3□□43-....		1	1 unit	103 67.000
II	1000	1000	80	B	3WL12 10-3□□43-....		1	1 unit	103 67.000
II	1250	1250	80	B	3WL12 12-3□□43-....		1	1 unit	103 67.000
II	1600	1600	80	B	3WL12 16-3□□43-....		1	1 unit	103 67.000
II	2000	2000	80	B	3WL12 20-3□□43-....		1	1 unit	103 67.000
II	2500	2500	80	B	3WL12 25-3□□43-....		1	1 unit	103 71.000
II	3200	3200	80	B	3WL12 32-3□□43-....		1	1 unit	103 77.000
Front main circuit connection, double hole									
I	630	630	66	B	3WL11 06-3□□44-....		1	1 unit	103 50.000
I	800	800	66	B	3WL11 08-3□□44-....		1	1 unit	103 50.000
I	1000	1000	66	B	3WL11 10-3□□44-....		1	1 unit	103 50.000
I	1250	1250	66	B	3WL11 12-3□□44-....		1	1 unit	103 50.000
I	1600	1600	66	B	3WL11 16-3□□44-....		1	1 unit	103 50.000
II	800	800	80	B	3WL12 08-3□□44-....		1	1 unit	103 67.000
II	1000	1000	80	B	3WL12 10-3□□44-....		1	1 unit	103 67.000
II	1250	1250	80	B	3WL12 12-3□□44-....		1	1 unit	103 67.000
II	1600	1600	80	B	3WL12 16-3□□44-....		1	1 unit	103 67.000
II	2000	2000	80	B	3WL12 20-3□□44-....		1	1 unit	103 67.000
II	2500	2500	80	B	3WL12 25-3□□44-....		1	1 unit	103 71.000
II	3200	3200	80	B	3WL12 32-3□□44-....		1	1 unit	103 77.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price			
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection									
ETU15B: Protection functions LI					BB				
ETU25B: Protection functions LSI					CB				
ETU45B: Protection functions LSIN ³⁾					EB				
ETU45B: Protection functions LSIN ³⁾ with 4-line display					FB				
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display					NB				
Versions with ground-fault protection									
ETU27B: Protection functions LSING ⁴⁾					DG				
ETU45B: Protection functions LSING ³⁾⁵⁾					EG				
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display					FG				
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display					NG				
Standard Order No. supplements (for further Order No. supplements, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

For footnotes see page 15/18.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 100 kA at 500 V, high switching capacity H		(H)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Horizontal main circuit connection									
II	800	800	100	B	3WL12 08-4□□42-....		1	1 unit	103 67.000
II	1000	1000	100	B	3WL12 10-4□□42-....		1	1 unit	103 67.000
II	1250	1250	100	B	3WL12 12-4□□42-....		1	1 unit	103 67.000
II	1600	1600	100	B	3WL12 16-4□□42-....		1	1 unit	103 67.000
II	2000	2000	100	B	3WL12 20-4□□42-....		1	1 unit	103 67.000
II	2500	2500	100	B	3WL12 25-4□□42-....		1	1 unit	103 71.000
II	3200	3200	100	B	3WL12 32-4□□42-....		1	1 unit	103 77.000
III	4000	4000	100	B	3WL13 40-4□□42-....		1	1 unit	103 99.000
III	5000	5000	100	B	3WL13 50-4□□42-....		1	1 unit	103 99.000
Vertical main circuit connection									
II	800	800	100	B	3WL12 08-4□□41-....		1	1 unit	103 67.000
II	1000	1000	100	B	3WL12 10-4□□41-....		1	1 unit	103 67.000
II	1250	1250	100	B	3WL12 12-4□□41-....		1	1 unit	103 67.000
II	1600	1600	100	B	3WL12 16-4□□41-....		1	1 unit	103 67.000
II	2000	2000	100	B	3WL12 20-4□□41-....		1	1 unit	103 67.000
II	2500	2500	100	B	3WL12 25-4□□41-....		1	1 unit	103 71.000
II	3200	3200	100	B	3WL12 32-4□□41-....		1	1 unit	103 77.000
II	4000	4000	100	B	3WL12 40-4□□41-....		1	1 unit	103 103.000
III	4000	4000	100	B	3WL13 40-4□□41-....		1	1 unit	103 99.000
III	5000	5000	100	B	3WL13 50-4□□41-....		1	1 unit	103 99.000
III	6300	6300	100	B	3WL13 63-4□□41-....		1	1 unit	103 108.000
Front main circuit connection, single hole									
II	800	800	100	B	3WL12 08-4□□43-....		1	1 unit	103 67.000
II	1000	1000	100	B	3WL12 10-4□□43-....		1	1 unit	103 67.000
II	1250	1250	100	B	3WL12 12-4□□43-....		1	1 unit	103 67.000
II	1600	1600	100	B	3WL12 16-4□□43-....		1	1 unit	103 67.000
II	2000	2000	100	B	3WL12 20-4□□43-....		1	1 unit	103 67.000
II	2500	2500	100	B	3WL12 25-4□□43-....		1	1 unit	103 71.000
II	3200	3200	100	B	3WL12 32-4□□43-....		1	1 unit	103 77.000
III	4000	4000	100	B	3WL13 40-4□□43-....		1	1 unit	103 99.000
Front main circuit connection, double hole									
II	800	800	100	B	3WL12 08-4□□44-....		1	1 unit	103 67.000
II	1000	1000	100	B	3WL12 10-4□□44-....		1	1 unit	103 67.000
II	1250	1250	100	B	3WL12 12-4□□44-....		1	1 unit	103 67.000
II	1600	1600	100	B	3WL12 16-4□□44-....		1	1 unit	103 67.000
II	2000	2000	100	B	3WL12 20-4□□44-....		1	1 unit	103 67.000
II	2500	2500	100	B	3WL12 25-4□□44-....		1	1 unit	103 71.000
II	3200	3200	100	B	3WL12 32-4□□44-....		1	1 unit	103 77.000
III	4000	4000	100	B	3WL13 40-4□□44-....		1	1 unit	103 99.000
Non-automatic air circuit breakers²⁾									
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					BB				
ETU15B: Protection functions LI ⁶⁾					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ³⁾					FB				
ETU45B: Protection functions LSIN ³⁾ with 4-line display					NB				
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display									
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁴⁾					EG				
ETU45B: Protection functions LSING ³⁾⁵⁾					FG				
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display					NG				
Standard Order No. supplements (for further Order No. supplements, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

For footnotes see page 15/18.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	I_{cu} up to 130 kA at 500 V, very high switching capacity C		Ⓒ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU				kg
Horizontal main circuit connection									
III	4000	4000	130	B	3WL13 40-5□□42-....		1	1 unit	103 99.000
III	5000	5000	130	B	3WL13 50-5□□42-....		1	1 unit	103 99.000
Vertical main circuit connection									
III	4000	4000	130	B	3WL13 40-5□□41-....		1	1 unit	103 99.000
III	5000	5000	130	B	3WL13 50-5□□41-....		1	1 unit	103 99.000
III	6300	6300	130	B	3WL13 63-5□□41-....		1	1 unit	103 108.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price			
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ³⁾					FB				
ETU45B: Protection functions LSIN ³⁾ with 4-line display					NB				
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display									
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁴⁾					EG				
ETU45B: Protection functions LSING ³⁾⁵⁾					FG				
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display					NG				
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display									
Standard Order No. supplements (for further Order No. supplements, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

Footnotes for pages 15/15 to 15/18:

- The rated current is determined by the rated current module. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 15/24.
- For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see Technical Information LV 1T, "Technical specifications".

- Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 15/34. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 15/26.
- Current transformers for protection of the N conductor are to be ordered separately, see page 15/34.
- ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 15/34.
- ETU15B cannot be used with 3WL circuit breakers, size III.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, withdrawable versions

Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \max}$	Rated current ¹⁾ I_n	I_{CU} up to 55/66 kA at 500 V, ECO switching capacity N		N	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU				kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
I	630	630	55	B	3WL11 06-2□□45-....		1	1 unit	103 54.000
I	800	800	55	B	3WL11 08-2□□45-....		1	1 unit	103 54.000
I	1000	1000	55	B	3WL11 10-2□□45-....		1	1 unit	103 54.000
I	1250	1250	55	B	3WL11 12-2□□45-....		1	1 unit	103 54.000
I	1600	1600	55	B	3WL11 16-2□□45-....		1	1 unit	103 54.000
II	800	800	66	B	3WL12 08-2□□45-....		1	1 unit	103 75.000
II	1000	1000	66	B	3WL12 10-2□□45-....		1	1 unit	103 75.000
II	1250	1250	66	B	3WL12 12-2□□45-....		1	1 unit	103 75.000
II	1600	1600	66	B	3WL12 16-2□□45-....		1	1 unit	103 75.000
II	2000	2000	66	B	3WL12 20-2□□45-....		1	1 unit	103 72.000
II	2500	2500	66	B	3WL12 25-2□□45-....		1	1 unit	103 76.000
II	3200	3200	66	B	3WL12 32-2□□45-....		1	1 unit	103 82.000
With guide frames, horizontal main circuit connection									
I	630	630	55	B	3WL11 06-2□□46-....		1	1 unit	103 84.000
I	800	800	55	B	3WL11 08-2□□46-....		1	1 unit	103 84.000
I	1000	1000	55	B	3WL11 10-2□□46-....		1	1 unit	103 84.000
I	1250	1250	55	B	3WL11 12-2□□46-....		1	1 unit	103 84.000
I	1600	1600	55	B	3WL11 16-2□□46-....		1	1 unit	103 84.000
II	800	800	66	B	3WL12 08-2□□46-....		1	1 unit	103 109.000
II	1000	1000	66	B	3WL12 10-2□□46-....		1	1 unit	103 109.000
II	1250	1250	66	B	3WL12 12-2□□46-....		1	1 unit	103 109.000
II	1600	1600	66	B	3WL12 16-2□□46-....		1	1 unit	103 109.000
II	2000	2000	66	B	3WL12 20-2□□46-....		1	1 unit	103 109.000
II	2500	2500	66	B	3WL12 25-2□□46-....		1	1 unit	103 123.000
II	3200	3200	66	B	3WL12 32-2□□46-....		1	1 unit	103 136.000
With guide frames, vertical main circuit connection									
I	630	630	55	B	3WL11 06-2□□47-....		1	1 unit	103 84.000
I	800	800	55	B	3WL11 08-2□□47-....		1	1 unit	103 84.000
I	1000	1000	55	B	3WL11 10-2□□47-....		1	1 unit	103 84.000
I	1250	1250	55	B	3WL11 12-2□□47-....		1	1 unit	103 84.000
I	1600	1600	55	B	3WL11 16-2□□47-....		1	1 unit	103 84.000
II	800	800	66	B	3WL12 08-2□□47-....		1	1 unit	103 109.000
II	1000	1000	66	B	3WL12 10-2□□47-....		1	1 unit	103 109.000
II	1250	1250	66	B	3WL12 12-2□□47-....		1	1 unit	103 109.000
II	1600	1600	66	B	3WL12 16-2□□47-....		1	1 unit	103 109.000
II	2000	2000	66	B	3WL12 20-2□□47-....		1	1 unit	103 109.000
II	2500	2500	66	B	3WL12 25-2□□47-....		1	1 unit	103 123.000
II	3200	3200	66	B	3WL12 32-2□□47-....		1	1 unit	103 136.000
II	4000	4000	66	B	3WL12 40-2□□47-....		1	1 unit	103 146.000
With guide frames, connecting flanges									
I	630	630	55	B	3WL11 06-2□□48-....		1	1 unit	103 84.000
I	800	800	55	B	3WL11 08-2□□48-....		1	1 unit	103 84.000
I	1000	1000	55	B	3WL11 10-2□□48-....		1	1 unit	103 84.000
I	1250	1250	55	B	3WL11 12-2□□48-....		1	1 unit	103 84.000
I	1600	1600	55	B	3WL11 16-2□□48-....		1	1 unit	103 84.000
II	800	800	66	B	3WL12 08-2□□48-....		1	1 unit	103 109.000
II	1000	1000	66	B	3WL12 10-2□□48-....		1	1 unit	103 109.000
II	1250	1250	66	B	3WL12 12-2□□48-....		1	1 unit	103 109.000
II	1600	1600	66	B	3WL12 16-2□□48-....		1	1 unit	103 109.000
II	2000	2000	66	B	3WL12 20-2□□48-....		1	1 unit	103 109.000
II	2500	2500	66	B	3WL12 25-2□□48-....		1	1 unit	103 123.000
II	3200	3200	66	B	3WL12 32-2□□48-....		1	1 unit	103 136.000

Non-automatic air circuit breakers²⁾

Without electronic release

AA

Additional
price
Without**Electronic releases****Versions without ground-fault protection**

ETU15B: Protection functions LI
 ETU25B: Protection functions LSI
 ETU45B: Protection functions LSIN³⁾
 ETU45B: Protection functions LSIN³⁾ with 4-line display
 ETU76B: Protection functions LSIN³⁾ with pixel graphics display

Versions with ground-fault protection

ETU27B: Protection functions LSING⁴⁾
 ETU45B: Protection functions LSING³⁾⁵⁾
 ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
 ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

BB
 CB
 EB
 FB
 NB
 DG
 EG
 FG
 NG

Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)

Manual operating mechanism with mechanical closing
 Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/22.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 66/80 kA at 500 V, standard switching capacity S		Ⓢ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
I	630	630	66	B	3WL11 06-3□□45-....		1	1 unit	103 54.000
I	800	800	66	B	3WL11 08-3□□45-....		1	1 unit	103 54.000
I	1000	1000	66	B	3WL11 10-3□□45-....		1	1 unit	103 54.000
I	1250	1250	66	B	3WL11 12-3□□45-....		1	1 unit	103 54.000
I	1600	1600	66	B	3WL11 16-3□□45-....		1	1 unit	103 54.000
II	800	800	80	B	3WL12 08-3□□45-....		1	1 unit	103 72.000
II	1000	1000	80	B	3WL12 10-3□□45-....		1	1 unit	103 72.000
II	1250	1250	80	B	3WL12 12-3□□45-....		1	1 unit	103 72.000
II	1600	1600	80	B	3WL12 16-3□□45-....		1	1 unit	103 72.000
II	2000	2000	80	B	3WL12 20-3□□45-....		1	1 unit	103 72.000
II	2500	2500	80	B	3WL12 25-3□□45-....		1	1 unit	103 76.000
II	3200	3200	80	B	3WL12 32-3□□45-....		1	1 unit	103 82.000
With guide frames, horizontal main circuit connection									
I	630	630	66	B	3WL11 06-3□□46-....		1	1 unit	103 84.000
I	800	800	66	B	3WL11 08-3□□46-....		1	1 unit	103 84.000
I	1000	1000	66	B	3WL11 10-3□□46-....		1	1 unit	103 84.000
I	1250	1250	66	B	3WL11 12-3□□46-....		1	1 unit	103 84.000
I	1600	1600	66	B	3WL11 16-3□□46-....		1	1 unit	103 84.000
II	800	800	80	B	3WL12 08-3□□46-....		1	1 unit	103 109.000
II	1000	1000	80	B	3WL12 10-3□□46-....		1	1 unit	103 109.000
II	1250	1250	80	B	3WL12 12-3□□46-....		1	1 unit	103 109.000
II	1600	1600	80	B	3WL12 16-3□□46-....		1	1 unit	103 109.000
II	2000	2000	80	B	3WL12 20-3□□46-....		1	1 unit	103 109.000
II	2500	2500	80	B	3WL12 25-3□□46-....		1	1 unit	103 123.000
II	3200	3200	80	B	3WL12 32-3□□46-....		1	1 unit	103 136.000
With guide frames, vertical main circuit connection									
I	630	630	66	B	3WL11 06-3□□47-....		1	1 unit	103 84.000
I	800	800	66	B	3WL11 08-3□□47-....		1	1 unit	103 84.000
I	1000	1000	66	B	3WL11 10-3□□47-....		1	1 unit	103 84.000
I	1250	1250	66	B	3WL11 12-3□□47-....		1	1 unit	103 84.000
I	1600	1600	66	B	3WL11 16-3□□47-....		1	1 unit	103 84.000
II	800	800	80	B	3WL12 08-3□□47-....		1	1 unit	103 109.000
II	1000	1000	80	B	3WL12 10-3□□47-....		1	1 unit	103 109.000
II	1250	1250	80	B	3WL12 12-3□□47-....		1	1 unit	103 109.000
II	1600	1600	80	B	3WL12 16-3□□47-....		1	1 unit	103 109.000
II	2000	2000	80	B	3WL12 20-3□□47-....		1	1 unit	103 109.000
II	2500	2500	80	B	3WL12 25-3□□47-....		1	1 unit	103 123.000
II	3200	3200	80	B	3WL12 32-3□□47-....		1	1 unit	103 136.000
II	4000	4000	80	B	3WL12 40-3□□47-....		1	1 unit	103 146.000
With guide frames, connecting flanges									
I	630	630	66	B	3WL11 06-3□□48-....		1	1 unit	103 84.000
I	800	800	66	B	3WL11 08-3□□48-....		1	1 unit	103 84.000
I	1000	1000	66	B	3WL11 10-3□□48-....		1	1 unit	103 84.000
I	1250	1250	66	B	3WL11 12-3□□48-....		1	1 unit	103 84.000
I	1600	1600	66	B	3WL11 16-3□□48-....		1	1 unit	103 84.000
II	800	800	80	B	3WL12 08-3□□48-....		1	1 unit	103 109.000
II	1000	1000	80	B	3WL12 10-3□□48-....		1	1 unit	103 109.000
II	1250	1250	80	B	3WL12 12-3□□48-....		1	1 unit	103 109.000
II	1600	1600	80	B	3WL12 16-3□□48-....		1	1 unit	103 109.000
II	2000	2000	80	B	3WL12 20-3□□48-....		1	1 unit	103 109.000
II	2500	2500	80	B	3WL12 25-3□□48-....		1	1 unit	103 123.000
II	3200	3200	80	B	3WL12 32-3□□48-....		1	1 unit	103 136.000

Non-automatic air circuit breakers²⁾

Without electronic release

AA

Additional
price
Without

Electronic releases

Versions without ground-fault protection

ETU15B: Protection functions LI
 ETU25B: Protection functions LSI
 ETU45B: Protection functions LSIN³⁾
 ETU45B: Protection functions LSIN³⁾ with 4-line display
 ETU76B: Protection functions LSIN³⁾ with pixel graphics display

Versions with ground-fault protection

ETU27B: Protection functions LSING⁴⁾
 ETU45B: Protection functions LSING³⁾⁵⁾
 ETU45B: Protection functions LSING³⁾⁵⁾ with 4-line display
 ETU76B: Protection functions LSING³⁾⁵⁾ with pixel graphics display

BB
 CB
 EB
 FB
 NB

DG
 EG
 FG
 NG

Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)

Manual operating mechanism with mechanical closing
 Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO

1AA2

Without

For footnotes see page 15/22.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 100 kA at 500 V, high switching capacity H		(H)	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
II	800	800	100	B	3WL12 08-4□□45-....		1	1 unit	103 72.000
II	1000	1000	100	B	3WL12 10-4□□45-....		1	1 unit	103 72.000
II	1250	1250	100	B	3WL12 12-4□□45-....		1	1 unit	103 72.000
II	1600	1600	100	B	3WL12 16-4□□45-....		1	1 unit	103 72.000
II	2000	2000	100	B	3WL12 20-4□□45-....		1	1 unit	103 72.000
II	2500	2500	100	B	3WL12 25-4□□45-....		1	1 unit	103 76.000
II	3200	3200	100	B	3WL12 32-4□□45-....		1	1 unit	103 82.000
III	4000	4000	100	B	3WL13 40-4□□45-....		1	1 unit	103 106.000
III	5000	5000	100	B	3WL13 50-4□□45-....		1	1 unit	103 106.000
III	6300	6300	100	B	3WL13 63-4□□45-....		1	1 unit	103 108.000
With guide frames, horizontal main circuit connection									
II	800	800	100	B	3WL12 08-4□□46-....		1	1 unit	103 109.000
II	1000	1000	100	B	3WL12 10-4□□46-....		1	1 unit	103 109.000
II	1250	1250	100	B	3WL12 12-4□□46-....		1	1 unit	103 109.000
II	1600	1600	100	B	3WL12 16-4□□46-....		1	1 unit	103 109.000
II	2000	2000	100	B	3WL12 20-4□□46-....		1	1 unit	103 109.000
II	2500	2500	100	B	3WL12 25-4□□46-....		1	1 unit	103 123.000
II	3200	3200	100	B	3WL12 32-4□□46-....		1	1 unit	103 136.000
III	4000	4000	100	B	3WL13 40-4□□46-....		1	1 unit	103 190.000
III	5000	5000	100	B	3WL13 50-4□□46-....		1	1 unit	103 190.000
With guide frames, vertical main circuit connection									
II	800	800	100	B	3WL12 08-4□□47-....		1	1 unit	103 109.000
II	1000	1000	100	B	3WL12 10-4□□47-....		1	1 unit	103 109.000
II	1250	1250	100	B	3WL12 12-4□□47-....		1	1 unit	103 109.000
II	1600	1600	100	B	3WL12 16-4□□47-....		1	1 unit	103 109.000
II	2000	2000	100	B	3WL12 20-4□□47-....		1	1 unit	103 109.000
II	2500	2500	100	B	3WL12 25-4□□47-....		1	1 unit	103 123.000
II	3200	3200	100	B	3WL12 32-4□□47-....		1	1 unit	103 136.000
II	4000	4000	100	B	3WL12 40-4□□47-....		1	1 unit	103 146.000
III	4000	4000	100	B	3WL13 40-4□□47-....		1	1 unit	103 190.000
III	5000	5000	100	B	3WL13 50-4□□47-....		1	1 unit	103 190.000
III	6300	6300	100	B	3WL13 63-4□□47-....		1	1 unit	103 227.000
With guide frames, connecting flanges									
II	800	800	100	B	3WL12 08-4□□48-....		1	1 unit	103 109.000
II	1000	1000	100	B	3WL12 10-4□□48-....		1	1 unit	103 109.000
II	1250	1250	100	B	3WL12 12-4□□48-....		1	1 unit	103 109.000
II	1600	1600	100	B	3WL12 16-4□□48-....		1	1 unit	103 109.000
II	2000	2000	100	B	3WL12 20-4□□48-....		1	1 unit	103 109.000
II	2500	2500	100	B	3WL12 25-4□□48-....		1	1 unit	103 123.000
II	3200	3200	100	B	3WL12 32-4□□48-....		1	1 unit	103 136.000
III	4000	4000	100	B	3WL13 40-4□□48-....		1	1 unit	103 190.000
Non-automatic air circuit breakers²⁾									
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					BB				
ETU15B: Protection functions LI ⁶⁾					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ³⁾					FB				
ETU76B: Protection functions LSIN ³⁾ with 4-line display					NB				
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁴⁾					EG				
ETU45B: Protection functions LSING ³⁾⁵⁾					FG				
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display					NG				
Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

For footnotes see page 15/22.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	I_{cu} up to 130 kA at 500 V, very high switching capacity C		Ⓒ	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	A	kA	DT	Order No. Order No. supplements, see page 15/23	Basic price per PU			kg
Without guide frames (for guide frames, see page 15/30 to 15/33)									
III	4000	4000	130	B	3WL13 40-5□□45-....		1	1 unit	103 115.000
III	5000	5000	130	B	3WL13 50-5□□45-....		1	1 unit	103 106.000
III	6300	6300	130	B	3WL13 63-5□□45-....		1	1 unit	103 108.000
With guide frames, horizontal main circuit connection									
III	4000	4000	130	B	3WL13 40-5□□46-....		1	1 unit	103 190.000
III	5000	5000	130	B	3WL13 50-5□□46-....		1	1 unit	103 190.000
With guide frames, vertical main circuit connection									
III	4000	4000	130	B	3WL13 40-5□□47-....		1	1 unit	103 190.000
III	5000	5000	130	B	3WL13 50-5□□47-....		1	1 unit	103 190.000
III	6300	6300	130	B	3WL13 63-5□□47-....		1	1 unit	103 227.000
Non-automatic air circuit breakers²⁾					Order No. supplements	Additional price			
Without electronic release					AA	Without			
Electronic releases									
Versions without ground-fault protection					CB				
ETU25B: Protection functions LSI					EB				
ETU45B: Protection functions LSIN ³⁾					FB				
ETU45B: Protection functions LSIN ³⁾ with 4-line display					NB				
ETU76B: Protection functions LSIN ³⁾ with pixel graphics display									
Versions with ground-fault protection					DG				
ETU27B: Protection functions LSING ⁴⁾					EG				
ETU45B: Protection functions LSING ³⁾⁵⁾					FG				
ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display					NG				
ETU76B: Protection functions LSING ³⁾⁵⁾ with pixel graphics display									
Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)									
Manual operating mechanism with mechanical closing					1AA2	Without			
Without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO									

Footnotes for pages 15/19 to 15/22:

- The rated current is determined by the rated current module. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 15/24.
- For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see Technical Information LV 1T, "Technical specifications".

- Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 15/34. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 15/26.
- Current transformers for protection of the N conductor are to be ordered separately, see page 15/34.
- ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 15/34.
- ETU15B cannot be used with 3WL circuit breakers, size III.

Selection and ordering data

	Order No. supplement	Additional price																
3WL 1...-.....-.....																		
Operating mechanisms																		
Manual operating mechanism with mechanical closing Manual operating mechanism with mechanical and electrical closing, closing solenoid suitable for uninterrupted duty, 100 % ON period Closing solenoid <table border="1"> <thead> <tr> <th>AC 50/60 Hz V</th> <th>V DC</th> </tr> </thead> <tbody> <tr> <td>110</td> <td>110 ... 125</td> </tr> <tr> <td>230</td> <td>220</td> </tr> </tbody> </table>	AC 50/60 Hz V	V DC	110	110 ... 125	230	220	1	Without										
AC 50/60 Hz V	V DC																	
110	110 ... 125																	
230	220																	
	2																	
	3																	
Manual/motorized operating mechanism with mechanical and electrical closing, closing solenoid suitable for uninterrupted duty, 100 % ON period Motor <table border="1"> <thead> <tr> <th>AC 50/60 Hz V</th> <th>V DC</th> </tr> </thead> <tbody> <tr> <td>208 ... 240</td> <td>220 ... 250</td> </tr> <tr> <td>110 ... 127</td> <td>110 ... 125</td> </tr> <tr> <td>--</td> <td>24</td> </tr> </tbody> </table> Closing solenoid <table border="1"> <thead> <tr> <th>AC 50/60 Hz V</th> <th>V DC</th> </tr> </thead> <tbody> <tr> <td>230</td> <td>220</td> </tr> <tr> <td>110</td> <td>110 ... 125</td> </tr> <tr> <td>--</td> <td>24</td> </tr> </tbody> </table>	AC 50/60 Hz V	V DC	208 ... 240	220 ... 250	110 ... 127	110 ... 125	--	24	AC 50/60 Hz V	V DC	230	220	110	110 ... 125	--	24	4	
AC 50/60 Hz V	V DC																	
208 ... 240	220 ... 250																	
110 ... 127	110 ... 125																	
--	24																	
AC 50/60 Hz V	V DC																	
230	220																	
110	110 ... 125																	
--	24																	
	5																	
	6																	
To order different voltages for motorized operating mechanism and closing solenoid or closing solenoid for synchronization purposes: "1" at the 13th digit of the Order No. and order codes, see page 15/25 .																		
1st auxiliary release																		
Without 1st auxiliary release Shunt release suitable for uninterrupted duty, 100 % ON period Operating range 0.85 ... 1.1 x U _s <table border="1"> <thead> <tr> <th>U_s AC 50/60 Hz V</th> <th>U_s V DC</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>24</td> </tr> <tr> <td>--</td> <td>30</td> </tr> <tr> <td>--</td> <td>48</td> </tr> <tr> <td>--</td> <td>60</td> </tr> <tr> <td>110</td> <td>110 ... 125</td> </tr> <tr> <td>230</td> <td>220</td> </tr> </tbody> </table>	U _s AC 50/60 Hz V	U _s V DC	--	24	--	30	--	48	--	60	110	110 ... 125	230	220	A	Without		
U _s AC 50/60 Hz V	U _s V DC																	
--	24																	
--	30																	
--	48																	
--	60																	
110	110 ... 125																	
230	220																	
	B																	
	C																	
	D																	
	E																	
	F																	
	G																	
2nd auxiliary release																		
Without 2nd auxiliary release Shunt release suitable for uninterrupted duty, 100 % ON period Operating range 0.85 ... 1.1 x U _s <table border="1"> <thead> <tr> <th>U_s AC 50/60 Hz V</th> <th>U_s V DC</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>24</td> </tr> <tr> <td>--</td> <td>30</td> </tr> <tr> <td>--</td> <td>48</td> </tr> <tr> <td>--</td> <td>60</td> </tr> <tr> <td>110</td> <td>110 ... 125</td> </tr> <tr> <td>230</td> <td>220</td> </tr> </tbody> </table>	U _s AC 50/60 Hz V	U _s V DC	--	24	--	30	--	48	--	60	110	110 ... 125	230	220	A	Without		
U _s AC 50/60 Hz V	U _s V DC																	
--	24																	
--	30																	
--	48																	
--	60																	
110	110 ... 125																	
230	220																	
	B																	
	C																	
	D																	
	E																	
	F																	
	G																	
Undervoltage release, instantaneous (≤ 80 ms), short-delay (≤ 200 ms) Operating range 0.85 ... 1.1 x U _s <table border="1"> <thead> <tr> <th>U_s AC 50/60 Hz V</th> <th>U_s V DC</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>24</td> </tr> <tr> <td>--</td> <td>30</td> </tr> <tr> <td>--</td> <td>48</td> </tr> <tr> <td>--</td> <td>60</td> </tr> <tr> <td>110 ... 127</td> <td>110 ... 125</td> </tr> <tr> <td>208 ... 240</td> <td>220 ... 250</td> </tr> <tr> <td>380 ... 415</td> <td>--</td> </tr> </tbody> </table>	U _s AC 50/60 Hz V	U _s V DC	--	24	--	30	--	48	--	60	110 ... 127	110 ... 125	208 ... 240	220 ... 250	380 ... 415	--	J	
U _s AC 50/60 Hz V	U _s V DC																	
--	24																	
--	30																	
--	48																	
--	60																	
110 ... 127	110 ... 125																	
208 ... 240	220 ... 250																	
380 ... 415	--																	
	K																	
	L																	
	M																	
	N																	
	P																	
Undervoltage release, can be delayed between 0.2 s and 3.2 s Operating range 0.85 ... 1.1 x U _s <table border="1"> <thead> <tr> <th>U_s AC 50/60 Hz V</th> <th>U_s V DC</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>48</td> </tr> <tr> <td>110 ... 127</td> <td>110 ... 125</td> </tr> <tr> <td>208 ... 240</td> <td>220 ... 250</td> </tr> <tr> <td>380 ... 415</td> <td>--</td> </tr> </tbody> </table>	U _s AC 50/60 Hz V	U _s V DC	--	48	110 ... 127	110 ... 125	208 ... 240	220 ... 250	380 ... 415	--	Q							
U _s AC 50/60 Hz V	U _s V DC																	
--	48																	
110 ... 127	110 ... 125																	
208 ... 240	220 ... 250																	
380 ... 415	--																	
	R																	
	S																	
	T																	
Auxiliary switches																		
1st auxiliary switch block 2 NO + 2 NC	2	Without																
1st + 2nd auxiliary switch block 4 NO + 4 NC 6 NO + 2 NC 5 NO + 3 NC	4																	
	7																	
	8																	

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Options

Add "-Z" to the complete Order No. and indicate the appropriate order code(s).

Order No. with "-Z"

Additional price

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
3WL - **Z**

and additional order code(s)

+ +

Code for "Further versions"-Z

Indication/operator control elements, door sealing frames

5-digit mechanical operating cycles counter¹⁾		C 0 1	
Electrical ON button in the operator panel²⁾	Button with sealing cap	C 1 1	
Possible only for circuit breakers with closing solenoid.	Key operation with lock CES	C 1 2	
Storage status signal switches²⁾ (S21)	1 NO	C 2 0	
Ready-to-close signal switch (S20)	1 NO	C 2 2	
Signal switches²⁾	For the first auxiliary release (S22)	C 2 6	
	For the second auxiliary release (S23)	C 2 7	
Motor shutdown switch in the operator panel³⁾		S 2 5	
EMERGENCY-STOP pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton	S 2 4	
Door sealing frames		T 4 0	

Reclosing lockouts and remote resets

Automatic reset of the reclosing lockout		K 0 1	
Tripped signal switch²⁾⁴⁾	1 CO	K 0 7	
Remote reset solenoid for displays and reset buttons including automatic reset of the reclosing lockout			
AC 50/60 Hz V	V DC		
--	24	K 1 0	
--	48	K 1 1	
120	125	K 1 2	
208 ... 250	208 ... 250	K 1 3	

Motorized operating mechanisms and closing/opening solenoids

Motorized operating mechanisms

Only possible if the 13th digit of the Order No. = "1"

Motor

AC 50/60 Hz V	V DC		
--	24 ... 30	M 0 1	
--	48 ... 60	M 0 3	
110 ... 127	110 ... 125	M 0 5	
208 ... 240	220 ... 250	M 0 6	

Closing solenoids suitable for uninterrupted duty, 100 % ON period

Only possible if the 13th digit of the Order No. = "1"

Activation solenoids

AC 50/60 Hz V	V DC		
--	24	M 2 1	
--	30	M 2 2	
--	48	M 2 3	
--	60	M 2 4	
110	110	M 2 5	
230	220	M 2 6	

Closing solenoids⁵⁾ – unsuitable for uninterrupted duty, 5 % ON period

Only possible if the 13th digit of the Order No. = "1"

Activation solenoids

AC 50/60 Hz V	V DC		
--	24	M 3 1	
--	48	M 3 3	
110 ... 127	110 ... 125	M 3 5	
208 ... 240	220 ... 250	M 3 6	

Opening solenoids (shunt releases)⁶⁾ –

not suitable for uninterrupted duty, 5 % ON period

Activation solenoids

AC 50/60 Hz V	V DC		
--	24	M 4 1	
--	48	M 4 3	
110 ... 127	110 ... 125	M 4 5	
208 ... 240	220 ... 250	M 4 6	

¹⁾ Only possible with motorized operating mechanism.

²⁾ Not possible with communications interface option, order code "F02" or "F12".

³⁾ Only for circuit breakers with motorized operating mechanism, not possible with order codes "C11", "C12".

⁴⁾ Not available for non-automatic air circuit breakers.

⁵⁾ Overexcited, i.e. opening time 50 ms (standard > 80 ms).

⁶⁾ Only possible if the 14th position of the Order No. for the circuit breaker is "A", i.e. "without 1st auxiliary release".

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Options

Add "-Z" to the complete Order No. and indicate the appropriate order code(s).

Order No. with "-Z"

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

3WL -Z
and additional order code(s)

□ □ □ + . . . + . . .

Code for
"Further versions"

-Z

		Order code for fixed-mounted version	Add. price for fixed-mounted version	Order code for withdrawable version	Add. price for withdrawable version
Locking devices					
Locking devices against unauthorized closing, in the operator panel					
The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1	Made by CES	S 0 1		S 0 1	
	Made by IKON	S 0 3		S 0 3	
	Assembly kit FORTRESS or Castell ¹⁾	S 0 5		S 0 5	
	Assembly kit for padlocks ²⁾	S 0 7		S 0 7	
	Made by Ronis	S 0 8		S 0 8	
	Made by Profalux	S 0 9		S 0 9	
EMERGENCY-STOP pushbuttons					
Mushroom pushbutton instead of the mechanical OFF pushbutton		S 2 4		S 2 4	
Locking devices against unauthorized closing, for withdrawable circuit breakers					
The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the cabinet door, active in the connected position; the function is retained when the circuit breaker is replaced	Made by CES	--		R 6 1	
	Made by Ronis	--		R 6 8	
	Made by Profalux	--		R 6 0	
Locking devices for operating mechanism handles with padlock²⁾					
		S 3 3		S 3 3	
Locking devices to prevent movement of the withdrawable circuit breakers					
Safety lock for mounting on the circuit breaker	Made by CES	--		S 7 1	
	Made by Profalux	--		S 7 5	
	Made by Ronis	--		S 7 6	
Locking mechanisms					
Locking mechanisms to prevent movement of the withdrawable circuit breaker in disconnected positions,					
consisting of Bowden wire and lock in the cabinet door	Made by CES	--		R 8 1	
	Made by Profalux	--		R 8 5	
	Made by Ronis	--		R 8 6	
Not possible in combination with order code "R30" or "R50".					
Locking mechanisms					
Not possible in combination with order code "R81", "R85" or "R86".	To prevent opening of the cabinet door in: ON position (fixed-mounted version)/ in connected position (withdrawable version)	S 3 0		R 3 0	
	To prevent movement with the cabinet door open	--		R 5 0	
Connection methods for auxiliary conductors					
Connections for screwless terminals (tension spring)					
		N 6 1		P 6 1	

¹⁾ Locks must be ordered from the manufacturer.

²⁾ Padlock not included in the scope of supply.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Options

Add "-Z" to the complete Order No. and indicate the appropriate order code(s).

Order No. with "-Z"

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

3WL -Z
and additional order code(s)

+ . . . + . . .

Code for
"Further versions"-Z

For withdrawable circuit breakers with guide frames or for guide frames¹⁾

To select this connection method, the 12th digit of the Order No. for the circuit breaker must be a "6"

Connection methods for main circuit connections

Top and bottom: accessible from front, single hole	Size I, up to 1600 A	P 0 0	
	Size II, up to 2000 A	P 0 0	
	Size II, up to 2500 A	P 0 0	
	Size II, up to 3200 A	P 0 0	
	Size III, up to 4000 A	P 0 0	
Top and bottom: accessible from front, double hole	Size I, up to 1600 A	P 0 1	
	Size II, up to 2000 A	P 0 1	
	Size II, up to 2500 A	P 0 1	
	Size II, up to 3200 A	P 0 1	
	Size III, up to 4000 A	P 0 1	
Top: horizontal, double hole	Size I, up to 1600 A	P 0 7	
	Size II, up to 2000 A	P 0 7	
	Size II, up to 2500 A	P 0 7	
	Bottom: accessible from front, single hole	Size II, up to 3200 A	P 0 7
		Size III, up to 4000 A	P 0 7
Top: vertical	Size I, up to 1600 A	P 1 8	
	Size II, up to 2000 A	P 1 8	
	Bottom: horizontal	Size II, up to 2500 A	P 1 8
		Size II, up to 3200 A	P 1 8
	Size III, up to 4000 A	P 1 8	
Size III, up to 5000 A	P 1 8		
Top: connecting flange	Size I, up to 1600 A	P 1 9	
	Size II, up to 2000 A	P 1 9	
	Bottom: horizontal	Size II, up to 2500 A	P 1 9
		Size II, up to 3200 A	P 1 9
	Size III, up to 4000 A	P 1 9	
Top: horizontal	Size I, up to 1600 A	P 2 3	
	Size II, up to 2000 A	P 2 3	
	Bottom: vertical	Size II, up to 2500 A	P 2 3
		Size II, up to 3200 A	P 2 3
	Size III, up to 4000 A	P 2 3	
Size III, up to 5000 A	P 2 3		

Add. price
3-pole

Add. price
4-pole

For fixed-mounted circuit breakers

To select this connection method, the 12th digit of the Order No. for the circuit breaker must be a "2"

Connection methods for main circuit connections

Top: horizontal	Size I, up to 1600 A	N 1 1	
	Size II, up to 2000 A	N 1 1	
	Bottom: accessible from front, single hole	Size II, up to 2500 A	N 1 1
		Size II, up to 3200 A	N 1 1
	Size III, up to 4000 A	N 1 1	
Top: vertical	Size I, up to 1600 A	N 2 0	
	Size II, up to 2000 A	N 2 0	
	Bottom: horizontal	Size II, up to 2500 A	N 2 0
		Size II, up to 3200 A	N 2 0
	Size III, up to 4000 A	N 2 0	
Size III, up to 5000 A	N 2 0		
Top: horizontal	Size I, up to 1600 A	N 2 4	
	Size II, up to 2000 A	N 2 4	
	Bottom: vertical	Size II, up to 2500 A	N 2 4
		Size II, up to 3200 A	N 2 4
	Size III, up to 4000 A	N 2 4	
Size III, up to 5000 A	N 2 4		

Add. price
3-pole

Add. price
4-pole

¹⁾ Only horizontal connection and vertical connection are available for circuit breakers with very high switching capacity C.

3WL Air Circuit Breakers


3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Overview

Determination of the number of auxiliary supply connectors required

This selection is only required if the guide frame is ordered under a separate Order No.



The required number of auxiliary supply connectors depends on:

- Operating mechanism type
- Electronic trip unit with/without current transformer
- Type and number of auxiliary releases
- Number of auxiliary switches
- COM15/COM16 communication interface

	Number of auxiliary supply connectors	Terminal
a First auxiliary supply connector X6 always required.	1	X6
b Operating mechanisms		
b1 Manual operating mechanism with stored-energy feature with mechanical closing	0	
b2 Manual operating mechanism with stored-energy feature with mechanical and electrical closing	0	X6
b3 Manual/motorized operating mechanism with stored-energy feature with mechanical and electrical closing	+1	X5
c Electronic trip units		
c1 Electronic trip units ETU15B, ETU25B, ETU27B	0	
c2 Electronic trip units ETU45B, ETU76B (internal CubicleBUS)	+1	X8
Connections for external current transformers for overload protection in the N conductor and ground-fault protection		
c3 Current transformer installed in the N conductor (required with 3-pole circuit breakers if c2 is not selected)	+1	X8
c4 Current transformer in the neutral point of the transformer (required if c2 or c3 is not selected)	+1	X8
d Auxiliary releases		
d1 With/without 1st auxiliary release (shunt trip unit F1)	0	X6
d2 2nd auxiliary release (shunt trip unit F2, undervoltage trip unit F3, delayable undervoltage trip unit F4)	+1	X5
e Auxiliary switch blocks		
e1 1st auxiliary switch block 2 NO + 2 NC	0	X6
e2 1st and 2nd auxiliary switch block 4 NO + 4 NC or 6 NO + 2 NC or 5 NO + 3 NC (required if b3 or d2 is not selected)	+1	X5
f Communication modules		
f1 Without communication module COM15/COM16	0	
f2 With communication module COM15/COM16 – occupies the entire terminal strip X7, making the following options no longer possible:	+1	X7
• Tripped signal switch S24		
• Stored-energy status indication S21		
• Electrical ON button S10		
• Signaling switch on first and second auxiliary release S22 + S23		
g Optional signals/accessories		
g1 Tripped signal switch S24 (only possible if f2 is not selected)	+1	X7
g2 Stored-energy status indication S21 (only possible if f2 is not selected, required if g1 is not selected)	+1	X7
g3 Electrical ON button S10 (only possible if f2 is not selected, required if g1 or g2 is not selected)	+1	X7
g4 Signal switch on first auxiliary release S22 (only possible if f2 is not selected, required if g1, g2 or g3 is not selected)	+1	X7
g5 Signal switch on second auxiliary release S23 (only possible if f2 is not selected, required if g1, g2, g3 or g4 is not selected)	+1	X7
g6 Ready-to-close indicator switch S20	0	X6
g7 Motor shutdown switch S12 (only possible if motorized operating mechanism is selected)	0	X5
g8 Remote reset solenoid F7 (required if c2 is not selected)	+1	X8
h Total number of auxiliary supply connectors	(max. 4)	

For ordering the auxiliary supply connectors see under

"Accessories and Spare Parts, Guide Frames for AC Circuit Breakers/Non-Automatic Air Circuit Breakers", pages 15/30 to 15/33 and under "Accessories and Spare Parts, Auxiliary Conductor Connections, Auxiliary Supply Connectors", page 15/39.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Selection and ordering data

Guide frames for AC circuit breakers/non-automatic air circuit breakers

Size	Max. rated circuit breaker current I_n max.	Switching capacity I_{cu}	DT	Guide frames for 3-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	kA		Order No. (Order No. supplements required according to table below)	Basic price per PU			kg
Front main circuit connection, single hole								
I	1000	... 100	B	3WL9 211-1AA□□-□□A1		1	1 unit	103 25.000
I	1600	... 100	B	3WL9 211-2AA□□-□□A1		1	1 unit	103 25.000
II	2000	... 100	B	3WL9 212-3AA□□-□□A1		1	1 unit	103 31.000
II	2500	... 100	B	3WL9 212-4AA□□-□□A1		1	1 unit	103 39.000
II	3200	... 100	B	3WL9 212-5AA□□-□□A1		1	1 unit	103 45.000
III	4000	... 100	B	3WL9 213-6AA□□-□□A1		1	1 unit	103 60.000
Front main circuit connection, double hole								
I	1000	... 100	B	3WL9 211-1AB□□-□□A1		1	1 unit	103 25.000
I	1600	... 100	B	3WL9 211-2AB□□-□□A1		1	1 unit	103 25.000
II	2000	... 100	B	3WL9 212-3AB□□-□□A1		1	1 unit	103 31.000
II	2500	... 100	B	3WL9 212-4AB□□-□□A1		1	1 unit	103 39.000
II	3200	... 100	B	3WL9 212-5AB□□-□□A1		1	1 unit	103 45.000
III	4000	... 100	B	3WL9 213-6AB□□-□□A1		1	1 unit	103 60.000
Horizontal main circuit connection								
I	1000	... 100	B	3WL9 211-1AC□□-□□A1		1	1 unit	103 25.000
I	1600	... 100	B	3WL9 211-2AC□□-□□A1		1	1 unit	103 25.000
II	2000	... 100	B	3WL9 212-3AC□□-□□A1		1	1 unit	103 31.000
II	2500	... 100	B	3WL9 212-4AC□□-□□A1		1	1 unit	103 39.000
II	3200	... 100	B	3WL9 212-5AC□□-□□A1		1	1 unit	103 45.000
III	4000	... 100	B	3WL9 213-6AC□□-□□A1		1	1 unit	103 60.000
III	5000	... 100	B	3WL9 213-7AC□□-□□A1		1	1 unit	103 60.000
III	4000	... 150	B	3WL9 213-6AC□□-□□C1		1	1 unit	103 63.000
III	5000	... 150	B	3WL9 213-7AC□□-□□C1		1	1 unit	103 63.000
Number of auxiliary supply connectors				Order No. supplements	Add. price			
Without				0	Without			
1 connector				1				
2 connectors				2				
3 connectors				3				
4 connectors				4				
For required number of auxiliary supply connectors, see table on page 15/29								
Type of auxiliary circuit connections								
Without				0	Without			
With screw connections (SIGUT)				1				
With screwless connection method (tension spring)				2				
Position indicator switches								
Without				0	Without			
Option 1				1				
Option 2				2				
Shutters								
Without				A	Without			
With shutter,				B				
2-part,								
lockable								
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).				Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price		
Rated voltage 1000 V AC					3WL9 2 1 -Z			
Size II, except 4000 A (switching capacity H)					□□□			
Size III, not necessary with with very high switching capacity								
Rated voltage 1150 V AC								
Size II, except 4000 A (switching capacity H)					A 0 5			
Tinned version of the customer's connections on the guide frame ¹⁾²⁾					A 0 5			
Only for guide frames with horizontal connection or flange connection								
Size I					A 0 8			
Size II					A 0 8			
Size III					A 0 8			

For main circuit connection vertical and main circuit connecting flange see the following page.

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 15/24 to 15/24.

1) Front connections are tinned as standard.

2) The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Size	Max. rated circuit breaker current I_n max.	Switching capacity I_{cu}	DT	Guide frames for 3-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	kA		Order No. (Order No. supplements required according to table below)	Basic price per PU			kg
Vertical main circuit connection								
I	1000	... 100	B	3WL9 211-1AD□□-□□A1		1	1 unit	103 25.000
I	1600	... 100	B	3WL9 211-2AD□□-□□A1		1	1 unit	103 25.000
II	2000	... 100	B	3WL9 212-3AD□□-□□A1		1	1 unit	103 31.000
II	2500	... 100	B	3WL9 212-4AD□□-□□A1		1	1 unit	103 39.000
II	3200	... 100	B	3WL9 212-5AD□□-□□A1		1	1 unit	103 45.000
II	4000	... 100	B	3WL9 212-6AD□□-□□A1		1	1 unit	103 52.000
III	4000	... 100	B	3WL9 213-6AD□□-□□A1		1	1 unit	103 60.000
III	5000	... 100	B	3WL9 213-7AD□□-□□A1		1	1 unit	103 60.000
III	6300	... 100	B	3WL9 213-8AD□□-□□A1		1	1 unit	103 70.000
III	4000	... 150	B	3WL9 213-6AD□□-□□C1		1	1 unit	103 63.000
III	5000	... 150	B	3WL9 213-7AD□□-□□C1		1	1 unit	103 63.000
III	6300	... 150	B	3WL9 213-8AD□□-□□C1		1	1 unit	103 74.000
Main circuit connection connecting flanges								
I	1000	... 100	B	3WL9 211-1AE□□-□□A1		1	1 unit	103 25.000
I	1600	... 100	B	3WL9 211-2AE□□-□□A1		1	1 unit	103 25.000
II	2000	... 100	B	3WL9 212-3AE□□-□□A1		1	1 unit	103 31.000
II	2500	... 100	B	3WL9 212-4AE□□-□□A1		1	1 unit	103 39.000
II	3200	... 100	B	3WL9 212-5AE□□-□□A1		1	1 unit	103 45.000
III	4000	... 100	B	3WL9 213-6AE□□-□□A1		1	1 unit	103 60.000
Number of auxiliary supply connectors				Order No. supplements	Add. price			
Without				0	Without			
1 connector				1				
2 connectors				2				
3 connectors				3				
4 connectors				4				
For required number of auxiliary supply connectors, see table on page 15/29								
Type of auxiliary circuit connections								
Without				0	Without			
With screw connections (SIGUT)				1				
With screwless connection method (tension spring)				2				
Position indicator switches								
Without				0	Without			
Option 1				1				
Option 2				2				
Shutters								
Without				A	Without			
With shutter, 2-part, lockable				B				
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).				Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price		
Rated voltage 1000 V AC					3WL9 2 1 -Z			
Size II, except 4000 A (switching capacity H)					□□□			
Size III, not necessary with circuit breakers with very high switching capacity								
Rated voltage 1150 V AC								
Size II, except 4000 A (switching capacity H)					A 0 5			
Tinned version of the customer's connections on the guide frame ¹⁾²⁾					A 0 5			
Only for guide frames with horizontal connection or flange connection								
Size I					A 1 5			
Size II								
Size III					A 0 8			
					A 0 8			
					A 0 8			

For main circuit connection front, single hole, main circuit connection front, double hole, and main circuit connection horizontal see the previous page.

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 15/24 to 15/28.

- 1) Front connections are tinned as standard.
- 2) The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Switching capacity I_{cu}	DT	Guide frames for 4-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	kA		Order No. (Order No. supplements required according to table below)	Basic price per PU			kg
Front main circuit connection, single hole								
I	1000	... 100	B	3WL9 211-1BA □□-□□A1		1	1 unit	103 30.000
I	1600	... 100	B	3WL9 211-2BA □□-□□A1		1	1 unit	103 30.000
II	2000	... 100	B	3WL9 212-3BA □□-□□A1		1	1 unit	103 37.000
II	2500	... 100	B	3WL9 212-4BA □□-□□A1		1	1 unit	103 47.000
II	3200	... 100	B	3WL9 212-5BA □□-□□A1		1	1 unit	103 54.000
III	4000	... 100	B	3WL9 213-6BA □□-□□A1		1	1 unit	103 84.000
Front main circuit connection, double hole								
I	1000	... 100	B	3WL9 211-1BB □□-□□A1		1	1 unit	103 30.000
I	1600	... 100	B	3WL9 211-2BB □□-□□A1		1	1 unit	103 30.000
II	2000	... 100	B	3WL9 212-3BB □□-□□A1		1	1 unit	103 37.000
II	2500	... 100	B	3WL9 212-4BB □□-□□A1		1	1 unit	103 47.000
II	3200	... 100	B	3WL9 212-5BB □□-□□A1		1	1 unit	103 54.000
III	4000	... 100	B	3WL9 213-6BB □□-□□A1		1	1 unit	103 84.000
Horizontal main circuit connection								
I	1000	... 100	B	3WL9 211-1BC □□-□□A1		1	1 unit	103 30.000
I	1600	... 100	B	3WL9 211-2BC □□-□□A1		1	1 unit	103 30.000
II	2000	... 100	B	3WL9 212-3BC □□-□□A1		1	1 unit	103 37.000
II	2500	... 100	B	3WL9 212-4BC □□-□□A1		1	1 unit	103 47.000
II	3200	... 100	B	3WL9 212-5BC □□-□□A1		1	1 unit	103 54.000
III	4000	... 100	B	3WL9 213-6BC □□-□□A1		1	1 unit	103 84.000
III	5000	... 100	B	3WL9 213-7BC □□-□□A1		1	1 unit	103 84.000
III	4000	... 130	B	3WL9 213-6BC □□-□□C1		1	1 unit	103 87.000
III	5000	... 130	B	3WL9 213-7BC □□-□□C1		1	1 unit	103 87.000
Number of auxiliary supply connectors				Order No. supplements	Add. price			
Without				0	Without			
1 connector				1				
2 connectors				2				
3 connectors				3				
4 connectors				4				
For required number of auxiliary supply connectors, see table on page 15/29								
Type of auxiliary circuit connections								
Without				0	Without			
With screw connections (SIGUT)				1				
With screwless connection method (tension spring)				2				
Position indicator switches								
Without				0	Without			
Option 1				1				
Option 2				2				
Shutters								
Without				A	Without			
With shutter, 2-part, lockable				B				
Size I								
Size II								
Size III								
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).				Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price		
Rated voltage 1000 V AC					3WL9 2 1 -Z			
Size II, except 4000 A (switching capacity H)					□□□			
Size III, not necessary with circuit breakers with very high switching capacity								
Rated voltage 1150 V AC								
Size II, except 4000 A (switching capacity H)					A 05			
Tinned version of the customer's connections on the guide frame ¹⁾²⁾					A 05			
Only for guide frames with horizontal connection or flange connection								
Size I					A 15			
Size II								
Size III					A 08			
					A 08			
					A 08			

For main circuit connection vertical and main circuit connecting flange see the following page.
All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 15/24 to 15/28.

- Front connections are tinned as standard.
- The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Size	Max. rated circuit breaker current I_n max.	Switching capacity I_{cu}	DT	Guide frames for 4-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
	A	kA		Order No. (Order No. supplements required according to table below)	Basic price per PU			kg
Vertical main circuit connection								
I	1000	... 100	B	3WL9 211-1BD□□-□□A1		1	1 unit	103 30.000
I	1600	... 100	B	3WL9 211-2BD□□-□□A1		1	1 unit	103 30.000
II	2000	... 100	B	3WL9 212-3BD□□-□□A1		1	1 unit	103 37.000
II	2500	... 100	B	3WL9 212-4BD□□-□□A1		1	1 unit	103 47.000
II	3200	... 100	B	3WL9 212-5BD□□-□□A1		1	1 unit	103 54.000
II	4000	... 100	B	3WL9 212-6BD□□-□□A1		1	1 unit	103 62.000
III	4000	... 100	B	3WL9 213-6BD□□-□□A1		1	1 unit	103 84.000
III	5000	... 100	B	3WL9 213-7BD□□-□□A1		1	1 unit	103 84.000
III	6300	... 100	B	3WL9 213-8BD□□-□□A1		1	1 unit	103 119.000
III	4000	... 130	B	3WL9 213-6BD□□-□□C1		1	1 unit	103 88.000
III	5000	... 130	B	3WL9 213-7BD□□-□□C1		1	1 unit	103 88.000
III	6300	... 130	B	3WL9 213-8BD□□-□□C1		1	1 unit	103 124.000

Main circuit connection connecting flanges								
I	1000	... 100	B	3WL9 211-1BE□□-□□A1		1	1 unit	103 30.000
I	1600	... 100	B	3WL9 211-2BE□□-□□A1		1	1 unit	103 30.000
II	2000	... 100	B	3WL9 212-3BE□□-□□A1		1	1 unit	103 37.000
II	2500	... 100	B	3WL9 212-4BE□□-□□A1		1	1 unit	103 47.000
II	3200	... 100	B	3WL9 212-5BE□□-□□A1		1	1 unit	103 54.000
III	4000	... 100	B	3WL9 213-6BE□□-□□A1		1	1 unit	103 84.000

Number of auxiliary supply connectors

- Without
- 1 connector
- 2 connectors
- 3 connectors
- 4 connectors

For required number of auxiliary supply connectors, see table on page 15/29

Type of auxiliary circuit connections

- Without
- With screw connections (SIGUT)
- With screwless connection method (tension spring)

Position indicator switches

- Without
- Option 1 Connected position 1 CO contact, test position 1 CO contact, disconnected position 1 CO contact
- Option 2 Connected position 3 CO contacts, test position 2 CO contacts, disconnected position 1 CO contact

Shutters

- Without
- With shutter, 2-part, lockable
- Size I
- Size II
- Size III

Order No. supplements Add. price

0	Without
1	
2	
3	
4	
0	Without
1	
2	
0	Without
1	
2	
A	Without
B	

Add "-Z" to the complete Order No. and indicate the appropriate order code(s). Order No. with "-Z" and additional order code

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
3WL9 2 1 . - - -Z
 □□□ Additional price

Rated voltage 1000 V AC	Size II, except 4000 A (switching capacity H)	A 0 5
	Size III, not necessary with circuit breakers with very high switching capacity	A 0 5
Rated voltage 1150 V AC	Size II, except 4000 A (switching capacity H)	A 1 5
Tinned version of the customer's connections on the guide frame ¹⁾²⁾		
Only for guide frames with horizontal connection or flange connection	Size I	A 0 8
	Size II	A 0 8
	Size III	A 0 8

For main circuit connection front, single hole, main circuit connection front, double hole, and main circuit connection horizontal see the previous page.



All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 15/24 to 15/28.

- 1) Front connections are tinned as standard.
- 2) The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Protective devices with device holder and optional measurement function¹⁾							
 NSE0_01610b	Type	With protection function	Measurement function				
	ETU15B	LI	Without	C	3WL9 311-5AA00-0AA2	1 1 unit	103 0.720
	ETU25B	LSI	Without	C	3WL9 312-5AA00-0AA2	1 1 unit	103 0.720
	ETU27B	LSING	Without	C	3WL9 312-7AA00-0AA2	1 1 unit	103 0.720
	ETU45B (without display)	LSIN(G)	Without	C	3WL9 314-5AA00-0AA2	1 1 unit	103 0.720
			With measurement function <i>Plus</i>	B	3WL9 314-5AA20-0AA2	1 1 unit	103 0.720
	ETU76B	LSIN(G)	Without	C	3WL9 317-6AA00-0AA2	1 1 unit	103 0.720
			With measurement function <i>Plus</i>	B	3WL9 317-6AA20-0AA2	1 1 unit	103 0.720
3WL9 311-AA.0-0AA1							
Rated current modules/Rating plugs²⁾							
 NSE0_00992b	For size	Rated current I_n (A)					
3WL9 111-0AA64-0AA0	I, II	250	B	3WL9 111-0AA51-0AA0	1 1 unit	103 0.010	
		315	B	3WL9 111-0AA52-0AA0	1 1 unit	103 0.010	
		400	B	3WL9 111-0AA53-0AA0	1 1 unit	103 0.010	
		500	B	3WL9 111-0AA54-0AA0	1 1 unit	103 0.010	
		630	B	3WL9 111-0AA55-0AA0	1 1 unit	103 0.010	
		800	B	3WL9 111-0AA56-0AA0	1 1 unit	103 0.010	
	I, II, III	1000	B	3WL9 111-0AA57-0AA0	1 1 unit	103 0.010	
		1250	B	3WL9 111-0AA58-0AA0	1 1 unit	103 0.010	
	II, III	1600	B	3WL9 111-0AA61-0AA0	1 1 unit	103 0.010	
		2000	B	3WL9 111-0AA62-0AA0	1 1 unit	103 0.010	
		2500	B	3WL9 111-0AA63-0AA0	1 1 unit	103 0.010	
		3200	B	3WL9 111-0AA64-0AA0	1 1 unit	103 0.010	
	III	4000	B	3WL9 111-0AA65-0AA0	1 1 unit	103 0.010	
		5000	B	3WL9 111-0AA66-0AA0	1 1 unit	103 0.010	
6300		B	3WL9 111-0AA67-0AA0	1 1 unit	103 0.010		
Ground-fault modules³⁾							
 NSE0_01027a	GFM AT 45B (only for ETU45B) alarm and tripping		B	3WL9 111-0AT53-0AA0	1 1 unit	103 0.030	
	GFM AT 55B-76B (only for ETU76B) alarm and tripping		B	3WL9 111-0AT56-0AA0	1 1 unit	103 0.030	
3WL9 111-0AT53-0AA0							
Displays							
 NSE0_01609	4-line displays for ETU45B		B	3WL9 111-0AT81-0AA0	1 1 unit	103 0.060	
3WL9 111-0AT81-0AA0							
Current transformers for N conductor protection							
 NSE0_00990a	Internal transf. for N conductors (not for ETU release 2)		Size I	B	3WL9 111-0AA11-0AA0	1 1 unit	103 0.200
			Size II	B	3WL9 111-0AA12-0AA0	1 1 unit	103 0.280
			Size III	B	3WL9 111-0AA13-0AA0	1 1 unit	103 0.500
3WL9 111-0AA2-.0AA0	Internal transf. for N conductors Only for ETU release 2		Size I	B	3WL9 111-0AA14-0AA0	1 1 unit	103 0.200
			Size II	B	3WL9 111-0AA15-0AA0	1 1 unit	103 0.280
			Size III	B	3WL9 111-0AA16-0AA0	1 1 unit	103 0.500
 NSE0_00991a	External transf. for N conductors (T5, see Technical Information LV 1 T, "Functions", "Measurement Method")		Size I	B	3WL9 111-0AA21-0AA0	1 1 unit	103 0.300
			Size II	B	3WL9 111-0AA22-0AA0	1 1 unit	103 0.380
			Size III	B	3WL9 111-0AA23-0AA0	1 1 unit	103 0.680
3WL9 111-0AA3-.0AA0	External transf. for N conductors With copper connection pieces (T5, see Technical Information LV 1 T, "Functions", "Measurement Method")		Size I	B	3WL9 111-0AA31-0AA0	1 1 unit	103 1.600
			Size II	B	3WL9 111-0AA32-0AA0	1 1 unit	103 4.260
			Size III	B	3WL9 111-0AA33-0AA0	1 1 unit	103 8.500
EMC filters							
EMC filters		Not for ETU release 2	X	3WL9 111-0AK32-0AA0	1 1 unit	103 0.280	
Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters)		Only for ETU release 2	X	3WL9 111-0AK34-0AA0	1 1 unit	103 0.280	
Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB							

¹⁾ For replacement in existing circuit breakers please specify the circuit breaker ID No. when ordering.









²⁾ With the rated current module selected, the maximum rated current $I_{n,max}$ of the circuit breaker must not be exceeded. The following applies $I_n \leq I_{n,max}$.

³⁾ For direct measurement of the ground-fault current, e.g. in the neutral point of the transformer, a 1200 A/1 A current transformer, class 1, is required. The internal load of the SENTRON 3WL is 0.11 Ω . If the ground-fault current is to be determined using the vectorial sum of the phases, a current transformer must be installed in the neutral conductor.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
More accessories for electronic releases							
 <p>3WL9 111-0AT45-0AA0</p>  <p>3WL9 111-0AK0-0AA0</p>	Sealable covers For ETU15B to ETU45B For ETU76	B	3WL9 111-0AT45-0AA0	1	1 unit	103	0.050
	Automatic reset of the reclosing lockout Spare part for option K01 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AT46-0AA0	1	1 unit	103	0.050
	Remote reset solenoids¹⁾ For mechanical tripped indicator Spare part for option K10 to K13 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AK03-0AA0	1	1 unit	103	0.200
	24 V DC	B	3WL9 111-0AK04-0AA0	1	1 unit	103	0.200
	48 V DC	B	3WL9 111-0AK05-0AA0	1	1 unit	103	0.200
	120 V AC/ 125 V DC	B	3WL9 111-0AK06-0AA0	1	1 unit	103	0.200
208-250 V AC/ 208-250 V DC	B	3WL9 111-0AK06-0AA0	1	1 unit	103	0.200	
Retrofittable internal CubicleBUS wiring for connection to terminal X8 (without male connector ²⁾)	B	3WL9 111-0AK30-0AA0	1	1 unit	103	0.150	
Retrofittable internal wiring for connection of the external N- and G-transformers to terminal X8 (without male connector, not for ETU release 2)	D	3WL9 111-0AK31-0AA0	1	1 unit	103	0.020	
Retrofittable internal wiring for connection of the external N- and G-transformers to terminal X8 for ETU release 2 (without male connector)	D	3WL9 111-0AK33-0AA0	1	1 unit	103	0.020	
Locking devices							
 <p>3WL9 111-0BA22-0AA0</p>  <p>3WL9 111-0BA22-0AA0</p>	Protective covers for mechanical ON/OFF Without safety lock Made by CES Made by IKON	B	3WL9 111-0BA21-0AA0	1	1 unit	103	0.100
	Consisting of 2 transparent covers each for sealing or for attaching padlocks ⁴⁾ , cover with 6.35 mm hole (for tool actuation), lock mount for safety lock for key operation	B	3WL9 111-0BA22-0AA0	1	1 unit	103	0.300
		B	3WL9 111-0BA24-0AA0	1	1 unit	103	0.300
 <p>3WL9 111-0BA31-0AA0</p>  <p>3WL9 111-0BA31-0AA0</p>	Locking devices against unauthorized closing, in the operator panel The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1 Spare part for option S01 to S09 , see "-Z" + order code, page 15/27 .	B	3WL9 111-0BA31-0AA0	1	1 unit	103	0.200
	Assembly kit FORTRESS or CASTELL ³⁾	B	3WL9 111-0BA33-0AA0	1	1 unit	103	0.400
	Made by Ronis	B	3WL9 111-0BA34-0AA0	1	1 unit	103	0.270
	Made by KIRK-Key	B	3WL9 111-0BA35-0AA0	1	1 unit	103	0.250
	Made by Profalux	B	3WL9 111-0BA35-0AA0	1	1 unit	103	0.200
	Made by CES	B	3WL9 111-0BA36-0AA0	1	1 unit	103	0.200
 <p>3WL9 111-0BA51-0AA0</p>  <p>3WL9 111-0BA53-0AA0</p>	Locking devices against unauthorized closing, for withdrawable circuit breakers The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1, consisting of lock in the cabinet door, active in connected position; function is retained when circuit breaker is replaced Spare part for option R60, R61, R68 , see "-Z" + order code, page 15/27 .	B	3WL9 111-0BA38-0AA0	1	1 unit	103	0.360
	Made by CES	B	3WL9 111-0BA51-0AA0	1	1 unit	103	0.300
	Made by IKON	B	3WL9 111-0BA53-0AA0	1	1 unit	103	0.300
	Made by KIRK-Key	B	3WL9 111-0BA57-0AA0	1	1 unit	103	0.300
	Made by Ronis	B	3WL9 111-0BA58-0AA0	1	1 unit	103	0.300
	Made by Profalux	B	3WL9 111-0BA50-0AA0	1	1 unit	103	0.227
Locking devices for operating mechanism handle with padlock⁴⁾ Spare part for option S33 , see "-Z" + order code, page 15/27 .	B	3WL9 111-0BA71-0AA0	1	1 unit	103	0.080	
 <p>3WL9 111-0BA71-0AA0</p>  <p>3WL9 111-0BA76-0AA0</p>	Locking devices against movement of the withdrawable circuit breakers Safety lock for mounting on the circuit breaker. Spare part for opt. S71, S75, S76 , see "-Z" + order code, page 15/27 .	B	3WL9 111-0BA73-0AA0	1	1 unit	103	0.300
	Made by CES	B	3WL9 111-0BA75-0AA0	1	1 unit	103	0.200
	Made by IKON	B	3WL9 111-0BA76-0AA0	1	1 unit	103	0.300
	Made by Profalux	B	3WL9 111-0BA77-0AA0	1	1 unit	103	0.300
	Made by Ronis	B	3WL9 111-0BA77-0AA0	1	1 unit	103	0.300
	Made by KIRK-Key	B	3WL9 111-0BA80-0AA0	1	1 unit	103	0.400
Interlocking systems Made by CES 2 of the same keys for 3 switches, Locking device OFF position, Key-operated switch on operator panel. A maximum of 2 switches can be switched on.	B	3WL9 111-0BA43-0AA0	1	1 unit	103	0.360	

¹⁾ Can only be used in conjunction with "automatic reset of reclosing lockout", e.g. "-Z" + "K01", 3WL9 111-0AK21-0AA0.

²⁾ Required if communication is retrofitted.

³⁾ Locks must be ordered from the manufacturer.



⁴⁾ Padlock not included in the scope of supply.

■ Start of delivery on request.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts



Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg		
Locking mechanisms									
 <p>NSE00987</p> <p>3WL9 111-0BA83-0AA0</p>	To prevent movement of the withdrawable circuit breakers in disconnected position, consisting of Bowden wire and lock in the cabinet door		Made by CES Made by IKON Made by Profalux Made by Ronis	B B B B	3WL9 111-0BA81-0AA0 3WL9 111-0BA83-0AA0 3WL9 111-0BA85-0AA0 3WL9 111-0BA86-0AA0	1 1 1 1	1 unit 1 unit 1 unit 1 unit	103 103 103 103	0.800 0.800 0.800 0.800
	Spare part for option R81, R85, R86 , see "-Z" + order code, page 15/27 .								
	Not possible in combination with "Locking mechanism to prevent opening of the cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the cabinet door open" (order code "R50").								
	 <p>NSE00988</p> <p>3WL9 111-0BB12-0AA0</p>	To prevent opening of the cabinet door in ON position (can be defeated)		Fixed mounting	B	3WL9 111-0BB12-0AA0	1	1 unit	103
Spare part for option S30 , see "-Z" + order code, page 15/27 .									
 <p>NSE00989</p> <p>3WL9 111-0BB21-0AA0</p>	To prevent opening of the cabinet door (can be defeated)		Guide frames	B	3WL9 111-0BB13-0AA0	1	1 unit	103	0.150
	Spare part for option R30 , see "-Z" + order code, page 15/27 . Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").								
 <p>NSE00989</p> <p>3WL9 111-0BB15-0AA0</p>	To prevent movement with the cabinet door open		Guide frames	B	3WL9 111-0BB15-0AA0	1	1 unit	103	0.150
	Spare part for option R50 , see "-Z" + order code, page 15/27 . Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").								
Interlocks									
 <p>NSE00989</p> <p>3WL9 111-0BB21-0AA0</p>	Mutual mechanical interlocking, with 2000 mm Bowden wire (one required for each circuit breaker)		Fixed-mounted circuit breaker	B	3WL9 111-0BB21-0AA0	1	1 unit	103	2.700
	Spare part for option S55 , see "-Z" + order code, page 15/26 .								
	Module for withdrawable circuit breaker with frame		B	3WL9 111-0BB24-0AA0	1	1 unit	103	1.130	
	Spare part for option R55 , see "-Z" + order code, page 15/26 .								
 <p>NSE00989</p> <p>3WL9 111-0BB22-0AA0</p>	When ordered separately		Module for guide frame	B	3WL9 111-0BB22-0AA0	1	1 unit	103	1.100
	Spare part for option R56 , see "-Z" + order code, page 15/26 .								
 <p>NSE00989</p> <p>3WL9 111-0BB23-0AA0</p>	Module for withdrawable circuit breaker		B	3WL9 111-0BB23-0AA0	1	1 unit	103	0.150	
	Spare part for option R57 , see "-Z" + order code, page 15/26 .								
 <p>NSE00989</p> <p>3WL9 111-0BB30-0AA0</p>	Adapter for size III Withdrawable circuit breaker		B	3WL9 111-0BB30-0AA0	1	1 unit	103	0.100	
	Couplings on the circuit breaker (with ring) for mutual interlocking Can be used in all circuit breakers								
 <p>NSE0_01886</p> <p>3WL9 112-8HA47-0AA0</p>	Bowden wires		2000 mm	B	3WL9 111-0BB45-0AA0	1	1 unit	103	0.150
			3000 mm	B	3WL9 111-0BB46-0AA0	1	1 unit	103	0.220
			4500 mm	B	3WL9 111-0BB47-0AA0	1	1 unit	103	0.360

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

	Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Indicators, control elements								
	Ready-to-close signaling switches 1 NO contact Spare part for option C22 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AH01-0AA0		1	1 unit	103	0.020
	Signaling switches¹⁾²⁾ Spare part for option C26 and C27 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AH02-0AA0	1st or 2nd auxiliary releases	1	1 unit	103	0.020
	Tripped signaling switches¹⁾²⁾ 1 CO Spare part for option K07 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AH14-0AA0		1	1 unit	103	0.080
	Operating cycles counters, mechanical³⁾ Spare part for option C01 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AH07-0AA0		1	1 unit	103	0.100
	Stored energy status signaling switches¹⁾²⁾ 1 NO contact Spare part for option C20 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AH08-0AA0		1	1 unit	103	0.030
	Position signaling switches for guide frames Spare part for option R15 and R16 , see "-Z" + order code, page 15/26 .	B	3WL9 111-0AH11-0AA0	1st block (3 CO contacts)	1	1 unit	103	0.200
	Electrical ON buttons¹⁾⁴⁾ (button+wiring) ²⁾ , for operator panel. Possible only for circuit breakers with closing solenoid.	B	3WL9 111-0AH12-0AA0	2nd block (6 CO contacts)	1	1 unit	103	0.400
	Motor shutdown switches⁵⁾ (mounting on operator panel) Spare part for option C11 and C12 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AJ02-0AA0	With sealing cap	1	1 unit	103	0.150
	EMERGENCY-STOP pushbuttons Mushroom pushbutton instead of the mechanical OFF pushbutton Spare part for option S24 , see "-Z" + order code, page 15/25 .	B	3WL9 111-0AJ03-0AA0	With CES assembly kit	1	1 unit	103	0.140
		B	3WL9 111-0AJ04-0AA0	With BKS assembly kit	1	1 unit	103	0.140
		B	3WL9 111-0AJ05-0AA0	With IKON assembly kit	1	1 unit	103	0.140
		B	3WL9 111-0AJ06-0AA0		1	1 unit	103	0.100
		B	3WL9 111-0BA72-0AA0		1	1 unit	103	0.080

¹⁾ Not possible with communications interface option, order code "F02" or "F12".

²⁾ X7 manual connector required for circuit breakers or guide frames. If this is not already available, please order additionally (see pages 15/29 and 15/39).









³⁾ Only in conjunction with motorized operating mechanism.

⁴⁾ Not possible with motor shutdown switch.

⁵⁾ Not possible with electrical ON button.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Auxiliary conductor connections							
 3WL9 111-0AB01-0AA0		Male connectors for circuit breakers ①	B	3WL9 111-0AB01-0AA0	1	1 unit	103 0.100
 3WL9 111-0AB02-0AA0		Extension for the 1000 V male connector versions (male connector must be ordered separately)	B	3WL9 111-0AB02-0AA0	1	1 unit	103 0.150
 3WL9 111-0AB03-0AA0		Male connectors and extension for 1000 V	B	3WL9 111-0AB10-0AA0	1	1 unit	103 1.000
 3WL9 111-0AB03-0AA0		Auxiliary supply connectors for circuit breakers or guide frames ② Screw connection (SIGUT)	B	3WL9 111-0AB03-0AA0	1	1 unit	103 0.070
 3WL9 111-0AB04-0AA0		Screwless connection method (tension spring)	B	3WL9 111-0AB04-0AA0	1	1 unit	103 0.070
 3WL9 111-0AB07-0AA0		Coding kits for fixed-mounted version (X5 to X8) ③	B	3WL9 111-0AB07-0AA0	1	1 unit	103 0.020
 3WL9 111-0AB08-0AA0		Sliding contact modules for guide frames ④	B	3WL9 111-0AB08-0AA0	1	1 unit	103 0.100
 3WL9 111-0AB18-0AA0		One-part sliding contact modules for guide frames Screw connection (SIGUT) ⑤	B	3WL9 111-0AB18-0AA0	1	1 unit	103 0.120
		Blanking blocks for circuit breakers	B	3WL9 111-0AB12-0AA0	1	1 unit	103 0.030

For a complete auxiliary current connection you must order:

Fixed-mounted version: ① + ② + ③

Withdrawable version: ① + ④ + ②

or





① + ⑤

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)








Accessories and spare parts

	Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg	
Auxiliary releases									
 NSE01000 3WL9 111-0AD06-0AA0	Closing solenoids/shunt releases								
	24 V DC	100 % ON period	B	3WL9 111-0AD01-0AA0		1	1 unit	103	0.700
	30 V DC		B	3WL9 111-0AD02-0AA0		1	1 unit	103	0.700
	48 V DC		B	3WL9 111-0AD03-0AA0		1	1 unit	103	0.700
	60 V DC		B	3WL9 111-0AD04-0AA0		1	1 unit	103	0.700
	110 ... 125 V DC/110 V AC		B	3WL9 111-0AD05-0AA0		1	1 unit	103	0.700
	220 V DC/230 V AC		B	3WL9 111-0AD06-0AA0		1	1 unit	103	0.700
	24 V DC	5 % ON period	B	3WL9 111-0AD11-0AA0		1	1 unit	103	0.700
	48 V DC		B	3WL9 111-0AD12-0AA0		1	1 unit	103	0.700
	110 ... 125 V DC/110 ... 127 V AC		B	3WL9 111-0AD13-0AA0		1	1 unit	103	0.700
220 ... 250 V DC/208 ... 240 V AC		B	3WL9 111-0AD14-0AA0		1	1 unit	103	1.800	
 NSE01001 3WL9 111-0AE0.-0AA0	Undervoltage releases								
	Instantaneous								
	24 V DC		B	3WL9 111-0AE01-0AA0		1	1 unit	103	0.730
	30 V DC		B	3WL9 111-0AE02-0AA0		1	1 unit	103	0.730
	48 V DC		B	3WL9 111-0AE03-0AA0		1	1 unit	103	0.730
	60 V DC		B	3WL9 111-0AE07-0AA0		1	1 unit	103	0.730
	110 ... 125 V DC/110 ... 127 V AC		B	3WL9 111-0AE04-0AA0		1	1 unit	103	0.730
	220 ... 250 V DC/208 ... 240 V AC		B	3WL9 111-0AE05-0AA0		1	1 unit	103	0.730
	380 ... 415 V AC		B	3WL9 111-0AE06-0AA0		1	1 unit	103	0.730
	Delayed								
	48 V DC		B	3WL9 111-0AE11-0AA0		1	1 unit	103	0.740
	110 ... 125 V DC/110 ... 127 V AC		B	3WL9 111-0AE12-0AA0		1	1 unit	103	0.740
	220 ... 250 V DC/208 ... 240 V AC		B	3WL9 111-0AE13-0AA0		1	1 unit	103	0.740
	380 ... 415 V AC		B	3WL9 111-0AE14-0AA0		1	1 unit	103	0.740
 NSE01002 3WL9 111-0AE1.-0AA0	Operating mechanisms								
	Motorized operating mechanisms¹⁾								
	24 ... 30 V DC		B	3WL9 111-0AF01-0AA0		1	1 unit	103	1.510
	48 ... 60 V DC		B	3WL9 111-0AF02-0AA0		1	1 unit	103	1.510
	110 ... 125 V DC/110 ... 127 V AC		B	3WL9 111-0AF03-0AA0		1	1 unit	103	1.510
220 ... 250 V DC/208 ... 240 V AC		B	3WL9 111-0AF04-0AA0		1	1 unit	103	1.510	
 NSE0_01003a 3WL9 111-0AF0.-0AA0	Auxiliary contacts								
	Auxiliary switch blocks								
	2 NO + 2 NC		B	3WL9 111-0AG01-0AA0		1	1 unit	103	0.180
	2 NO		B	3WL9 111-0AG02-0AA0		1	1 unit	103	0.080
1 NO + 1 NC		B	3WL9 111-0AG03-0AA0		1	1 unit	103	0.070	
3WL9 111-0AG03-0AA0									

¹⁾ X7 manual connector required for circuit breakers or guide frames.
If this is not already available, please order additionally
(see pages 15/29 and 15/39).

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts



	Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg	
Door sealing frames, covers, shutters									
	Door sealing frames	B	3WL9 111-0AP01-0AA0		1	1 unit	103	0.360	
	Spare part for option T40 , see "-Z" + order code, page 15/25 .								
	Protective covers, IP55	B	3WL9 111-0AP02-0AA0		1	1 unit	103	1.600	
	cannot be used in conjunction with door sealing frames, cover removable and can be opened on both sides								
	Shutters								
	Spare part for option R21 , see "-Z" + order code, page 15/26 .								
	3-pole	Size I	B	3WL9 111-0AP04-0AA0		1	1 unit	103	0.500
		Size II	B	3WL9 111-0AP06-0AA0		1	1 unit	103	0.630
		Size III	B	3WL9 111-0AP07-0AA0		1	1 unit	103	0.860
	4-pole	Size I	B	3WL9 111-0AP08-0AA0		1	1 unit	103	0.600
	Size II	B	3WL9 111-0AP11-0AA0		1	1 unit	103	0.770	
	Size III	B	3WL9 111-0AP12-0AA0		1	1 unit	103	1.070	
Arc chutes									
	Arc chutes								
	690 V	Size I	B	3WL9 111-0AS01-0AA0		1	1 unit	103	1.110
		Size II	B	3WL9 111-0AS02-0AA0		1	1 unit	103	1.680
		Size III	B	3WL9 111-0AS03-0AA0		1	1 unit	103	2.980
	1000 V/1150 V	Size II	B	3WL9 111-0AS05-0AA0		1	1 unit	103	3.140
		Size III	B	3WL9 111-0AS06-0AA0		1	1 unit	103	5.620
	Arc chute covers¹⁾								
	Assembly kit for guide frame								
	Spare part for option R10 , see "-Z" + order code, page 15/26 .								
	3-pole	Size I	B	3WL9 111-0AS32-0AA0		1	1 unit	103	1.850
		Size II	B	3WL9 111-0AS36-0AA0		1	1 unit	103	2.600
		Size III	B	3WL9 111-0AS38-0AA0		1	1 unit	103	4.050
4-pole	Size I	B	3WL9 111-0AS42-0AA0		1	1 unit	103	2.340	
	Size II	B	3WL9 111-0AS44-0AA0		1	1 unit	103	3.300	
	Size III	B	3WL9 111-0AS46-0AA0		1	1 unit	103	5.210	
Withdrawable part coding									
	Withdrawable part coding	B	3WL9 111-0AR12-0AA0		1	1 unit	103	0.400	
	By customer, for 36 coding variants								

¹⁾ Not available for 1000 V version, 1150 V version, DC version and size II with rated circuit breaker current of 4000 A.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts



	Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Ground-fault protection								
 NSE0 01018a 3WL9 111-0BA02-0AA0	Ground-fault protection between the guide frame and the withdrawable circuit breakers For 30 kA ground short-circuit current ¹⁾ Contacting module for guide frame	Size I, II	B	3WL9 111-0BA01-0AA0		1 1 unit	103	0.330
		Size III	B	3WL9 111-0BA02-0AA0		1 1 unit	103	0.350
Contacting modules for withdrawable circuit breakers								
 NSE01019 3WL9 111-0BA07-0AA0	3-pole	Size I	B	3WL9 111-0BA05-0AA0		1 1 unit	103	1.250
		Size II	B	3WL9 111-0BA06-0AA0		1 1 unit	103	1.530
		Size III	B	3WL9 111-0BA07-0AA0		1 1 unit	103	2.270
	4-pole	Size I	B	3WL9 111-0BA08-0AA0		1 1 unit	103	1.500
		Size II	B	3WL9 111-0BA04-0AA0		1 1 unit	103	1.850
		Size III	B	3WL9 111-0BA10-0AA0		1 1 unit	103	2.950
Support brackets								
 NSE-01022 3WL9 111-0BB50-0AA0	Support brackets For mounting fixed-mounted circuit breakers on vertical plane, only for sizes I and II (1 set = 2 units)		B	3WL9 111-0BB50-0AA0		1 1 unit	103	7.000

¹⁾ For 60 kA ground short-circuit current, order 2.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
CubicleBUS modules¹⁾							
 <p>NSE0_01023a</p> <p>3WL9 111-0AT23-0AA0</p>		Digital output modules with rotary coding switch, relay outputs	B	3WL9 111-0AT26-0AA0	1	103	0.240
		Digital output modules, configurable, relay outputs	B	3WL9 111-0AT20-0AA0	1	103	0.310
		Digital input modules	B	3WL9 111-0AT27-0AA0	1	103	0.240
		Analog output modules	B	3WL9 111-0AT23-0AA0	1	103	0.240
		Zone Selective Interlocking modules	B	3WL9 111-0AT21-0AA0	1	103	0.240
Parameterization systems							
 <p>NSE0_01024a</p> <p>3WL9 111-0AT28-0AA0</p>		Breaker Data Adapters (BDA)³⁾	B	3WL9 111-0AT28-0AA0	1	103	0.900
		BDA Plus³⁾	B	3WL9 111-0AT33-0AA0	1	103	1.200
		Connection cables for BDA Plus	B	3WL9 111-0BC21-0AA0	1	103	0.350
		Switch ES Power parameterization software	A	3ZS2 311-0CC10-0YA0	1	133	0.200
Accessories for communications							
		Preassembled cables for CubicleBUS modules	B	3WL9 111-0BC04-0AA0	1	103	0.020
			B	3WL9 111-0BC02-0AA0	1	103	0.050
			B	3WL9 111-0BC03-0AA0	1	103	0.060
			B	3WL9 111-0BC05-0AA0	1	103	0.070
		SENTRON manuals for communication solutions²⁾					
		Detailed description of the communication functions for SENTRON circuit breakers incl. installation, connection, commissioning, data transmission to PLC as well as description of Switch ES Power and BDA.					
		English	Token fee on request	A5E0151353-01			
		German	Token fee on request	A5E0151347-01			
		To be ordered from: http://www.click4business-supplies.de					
		Free download from: http://www.siemens.com/lowvoltage/manuals					
		Voltage transformers, 3-pole, for SENTRON 3WL with measurement function Plus	B	3WL9 111-0BB68-0AA0	1	103	2.600

All communication components, **CubicleBUS** modules and measurement functions are available for the ETU45B and ETU76B releases.

¹⁾ Each **CubicleBUS** module is supplied with a 0,2 m factory-fitted cable to connect the modules with each other. A longer factory-fitted cable is required for connection to the circuit breaker.


²⁾ Manual for MODBUS communication solution available on request.

³⁾ A 24 V DC power supply unit is required.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts



Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
Retrofitting and spare parts for communication							
 <p>3WL9 111-0AT15-0AA0</p>		PROFIBUS retrofit kits	Retrofit kit for PROFIBUS communications including COM15, BSS and set of cables for all SENTRON 3WL circuit breakers with ETU45B and ETU76B releases	B	3WL9 111-0AT12-0AA0	1	1 unit 103 0.260
		COM15 PROFIBUS modules		B	3WL9 111-0AT15-0AA0	1	1 unit 103 0.140
		MODBUS retrofit kits	Retrofit kit for MODBUS communications including COM16, BSS and set of cables for all SENTRON 3WL circuit breakers with ETU45B and ETU76B releases	B	3WL9 111-0AT14-0AA0	1	1 unit 103 0.260
		COM16 MODBUS modules		B	3WL9 111-0AT17-0AA0	1	1 unit 103 0.140
		Breaker status sensor (BSS)		B	3WL9 111-0AT16-0AA0	1	1 unit 103 0.120
		Measurement function Plus¹⁾	For all ETUs except ETU release 2 (voltage transformer required)	B	3WL9 111-0AT03-0AA0	1	1 unit 103 0.250
		Measurement function Plus¹⁾	For ETU release 2 (voltage transformer required)	B	3WL9 111-0AT04-0AA0	1	1 unit 103 0.250

All communication components, **CubicleBUS** modules and measurement functions are available for the ETU45B and ETU76B releases.

¹⁾ If retrofitted, a measuring accuracy of 3 % is achieved.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg	
Main conductor connections, fixed mounting (essential accessory)								
3WL9 111-0AL06-0AA0	Specified for each connection							
	Front-accessible main circuit connections, single hole at top	Size I, up to 1000 A	B	3WL9 111-0AL01-0AA0	1	1 unit	103	1.100
		Size I, 1250 to 1600 A	B	3WL9 111-0AL02-0AA0	1	1 unit	103	1.600
		Size II, up to 2000 A	B	3WL9 111-0AL03-0AA0	1	1 unit	103	2.000
		Size II, up to 2500 A	B	3WL9 111-0AL04-0AA0	1	1 unit	103	3.600
		Size II, up to 3200 A	B	3WL9 111-0AL05-0AA0	1	1 unit	103	3.500
		Size III, up to 4000 A	B	3WL9 111-0AL06-0AA0	1	1 unit	103	6.100
3WL9 111-0AL56-0AA0	Front-accessible main circuit connections, single hole at bottom	Size I, up to 1000 A	B	3WL9 111-0AL51-0AA0	1	1 unit	103	1.000
		Size I, 1250 to 1600 A	B	3WL9 111-0AL52-0AA0	1	1 unit	103	1.300
		Size II, up to 2000 A	B	3WL9 111-0AL53-0AA0	1	1 unit	103	1.800
		Size II, up to 2500 A	B	3WL9 111-0AL54-0AA0	1	1 unit	103	3.100
		Size II, up to 3200 A	B	3WL9 111-0AL55-0AA0	1	1 unit	103	3.000
		Size III, up to 4000 A	B	3WL9 111-0AL56-0AA0	1	1 unit	103	5.200
3WL9 111-0AL14-0AA0	Front-accessible main circuit connections, acc. to DIN 43673, double hole at top	Size I, up to 1000 A	B	3WL9 111-0AL07-0AA0	1	1 unit	103	1.400
		Size I, 1250 to 1600 A	B	3WL9 111-0AL08-0AA0	1	1 unit	103	2.000
		Size II, up to 2000 A	B	3WL9 111-0AL11-0AA0	1	1 unit	103	2.400
		Size II, up to 2500 A	B	3WL9 111-0AL12-0AA0	1	1 unit	103	4.500
		Size II, up to 3200 A	B	3WL9 111-0AL13-0AA0	1	1 unit	103	4.400
		Size III, up to 4000 A	B	3WL9 111-0AL14-0AA0	1	1 unit	103	7.800
3WL9 111-0AL64-0AA0	Front-accessible main circuit connections, acc. to DIN43673, double hole at bottom	Size I, up to 1000 A	B	3WL9 111-0AL57-0AA0	1	1 unit	103	1.300
		Size I, 1250 to 1600 A	B	3WL9 111-0AL58-0AA0	1	1 unit	103	1.700
		Size II, up to 2000 A	B	3WL9 111-0AL61-0AA0	1	1 unit	103	2.000
		Size II, up to 2500 A	B	3WL9 111-0AL62-0AA0	1	1 unit	103	3.700
		Size II, up to 3200 A	B	3WL9 111-0AL63-0AA0	1	1 unit	103	3.600
		Size III, up to 4000 A	B	3WL9 111-0AL64-0AA0	1	1 unit	103	6.400
	Rear vertical main circuit connections	Size I ¹⁾ , up to 1600 A	B	3WL9 111-0AM01-0AA0	1	1 unit	103	0.500
		Size II ²⁾ , up to 3200 A	B	3WL9 111-0AM02-0AA0	1	1 unit	103	2.200
		Size III, up to 6300 A	B	3WL9 111-0AM03-0AA0	1	1 unit	103	5.000
3WL9 111-0AM03-0AA0								






1) In the case of vertical connection size I, up to 1000 A one 3WL9 111-0AM01-0AA0 vertical connection is required, up to 1600 A two 3WL9 111-0AM01-0AA0 vertical connections are required.

2) In the case of vertical connection size II, up to 2500 A one 3WL9 111-0AM02-0AA0 vertical connection is required, up to 3200 A two 3WL9 111-0AM02-0AA0 vertical connections are required.

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg	
Main conductor connections, withdrawable versions (essential accessory)								
Specified for each connection								
 NSE-01013 3WL9 111-0AN06-0AA0	Front-accessible main circuit connections, single hole at top or at bottom¹⁾	Size I, up to 1000 A	B	3WL9 111-0AN01-0AA0	1	1 unit	103	1.000
		Size I, 1250 to 1600 A	B	3WL9 111-0AN02-0AA0	1	1 unit	103	1.300
		Size II, up to 2000 A	B	3WL9 111-0AN03-0AA0	1	1 unit	103	1.800
		Size II, up to 2500 A	B	3WL9 111-0AN04-0AA0	1	1 unit	103	3.100
		Size II, up to 3200 A	B	3WL9 111-0AN05-0AA0	1	1 unit	103	3.000
 NSE-01014 3WL9 111-0AN14-0AA0	Front-accessible main circuit connections, acc. to DIN 43673, double hole at top or at bottom¹⁾	Size I, up to 1000 A	B	3WL9 111-0AN07-0AA0	1	1 unit	103	1.300
		Size I, 1250 to 1600 A	B	3WL9 111-0AN08-0AA0	1	1 unit	103	1.700
		Size II, up to 2000 A	B	3WL9 111-0AN11-0AA0	1	1 unit	103	2.000
		Size II, up to 2500 A	B	3WL9 111-0AN12-0AA0	1	1 unit	103	3.700
		Size II, up to 3200 A	B	3WL9 111-0AN13-0AA0	1	1 unit	103	3.600
 NSE-01017 3WL9 111-0AN41-0AA0	Supports for front and DIN connecting bars							
	3-pole for 3 bars	Size I	B	3WL9 111-0AN41-0AA0	1	1 unit	103	0.700
		Size II	B	3WL9 111-0AN42-0AA0	1	1 unit	103	1.350
		Size III	B	3WL9 111-0AN43-0AA0	1	1 unit	103	2.420
	4-pole for 4 bars	Size I	B	3WL9 111-0AN44-0AA0	1	1 unit	103	1.200
		Size II	B	3WL9 111-0AN45-0AA0	1	1 unit	103	2.200
 NSE-01015 3WL9 111-0AN23-0AA0	Rear vertical main circuit connections	Size I, up to 1000 A	B	3WL9 111-0AN15-0AA0	1	1 unit	103	0.660
		Size I, 1250 to 1600 A	B	3WL9 111-0AN16-0AA0	1	1 unit	103	0.870
		Size II, up to 2000 A	B	3WL9 111-0AN17-0AA0	1	1 unit	103	1.150
		Size II, up to 2500 A	B	3WL9 111-0AN18-0AA0	1	1 unit	103	1.490
		Size II, up to 3200 A	B	3WL9 111-0AN21-0AA0	1	1 unit	103	2.580
		Size III, up to 5000 A	B	3WL9 111-0AN22-0AA0	1	1 unit	103	6.380
		Size III, up to 6300 A (3 busbar connection pieces for 3-pole circuit breakers)	B	3WL9 111-0AN23-0AA0	1	1 unit	103	19.170
		Size III, up to 6300 A (4 busbar connection pieces for 4-pole circuit breakers)	B	3WL9 111-0AN20-0AA0	1	1 unit	103	18.410
		Size III, up to 6300 A (4 busbar connection pieces for 4-pole circuit breakers)	B	3WL9 111-0AN10-0AA0	1	1 unit	103	18.300
	 NSE-01016 3WL9 111-0AN24-0AA0	Rear horizontal circuit connections	Size I, up to 1000 A	B	3WL9 111-0AN32-0AA0	1	1 unit	103
		Size I, 1250 to 1600 A	B	3WL9 111-0AN33-0AA0	1	1 unit	103	0.770
		Size II, up to 2000 A	B	3WL9 111-0AN34-0AA0	1	1 unit	103	1.020
		Size II, up to 2500 A	B	3WL9 111-0AN35-0AA0	1	1 unit	103	1.240
		Size II, up to 3200 A	B	3WL9 111-0AN36-0AA0	1	1 unit	103	2.170
 NSE-01016 3WL9 111-0AN24-0AA0	Connecting flanges	Size III, up to 5000 A	B	3WL9 111-0AN37-0AA0	1	1 unit	103	3.860
		Size I, up to 1000 A	B	3WL9 111-0AN24-0AA0	1	1 unit	103	0.610
		Size I, 1250 to 1600 A	B	3WL9 111-0AN25-0AA0	1	1 unit	103	0.640
		Size II, up to 2000 A	B	3WL9 111-0AN26-0AA0	1	1 unit	103	0.980
		Size II, up to 2500 A	B	3WL9 111-0AN27-0AA0	1	1 unit	103	1.020
		Size II, up to 3200 A	B	3WL9 111-0AN28-0AA0	1	1 unit	103	1.310
		Size III, up to 4000 A	B	3WL9 111-0AN31-0AA0	1	1 unit	103	2.370

¹⁾ When using front-accessible main circuit connections (withdrawable circuit breakers) supports are required.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Designation	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
-------------	----	-----------	--------------	-------------------	-----	----	--------------------------

Conversion sets

For converting fixed-mounted circuit breakers into withdrawable circuit breakers


Guide frames and sliding contact modules must be ordered separately.

Number of poles	Size						
3-pole	I	B	3WL9 111-0BC11-0AA0	1	1 unit	103	5.100
	II	B	3WL9 111-0BC12-0AA0	1	1 unit	103	5.900
	III	B	3WL9 111-0BC13-0AA0	1	1 unit	103	8.100
4-pole	I	B	3WL9 111-0BC14-0AA0	1	1 unit	103	6.400
	II	B	3WL9 111-0BC15-0AA0	1	1 unit	103	6.450
	III	B	3WL9 111-0BC16-0AA0	1	1 unit	103	10.700

Main contact elements

You must specify the circuit breaker ID No. when ordering!

Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units)



Sizes	I_n max		Order No. is automatically adapted to the circuit breaker ID number				
I	Up to 1600 A	B	3WL9 111-0AM90 L1Y¹⁾	1	1 unit	103	On req.
II	Up to 2500 A	B	3WL9 111-0AM91 L1Y¹⁾	1	1 unit	103	On req.
II	Up to 4000 A	B	3WL9 111-0AM92 L1Y¹⁾	1	1 unit	103	On req.
III	Up to 6300 A	B	3WL9 111-0AM93 L1Y¹⁾	1	1 unit	103	On req.

1) Please specify the circuit breaker ID No. in plain text when ordering.



3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

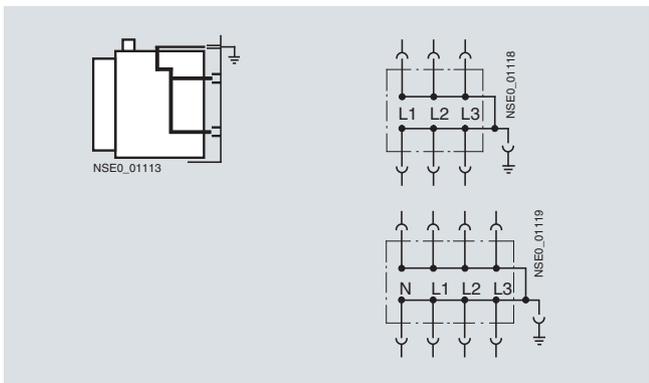
Accessories and spare parts

Schematics in as-supplied state	Version	Size	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
---------------------------------	---------	------	----	-----------	--------------	-------------------	-----	----	--------------------------

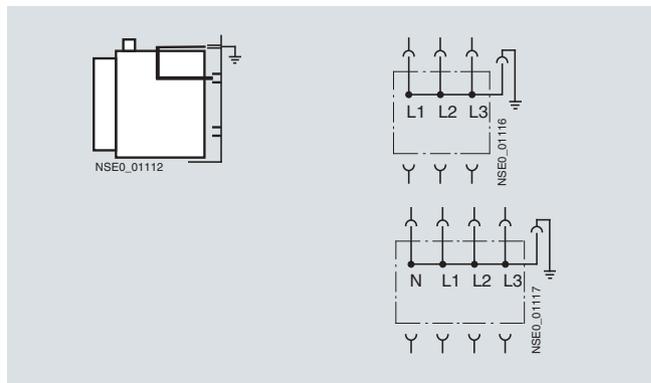
Withdrawable short-circuits, grounding and bridging units

 <p>NSE0_01113</p> <p>(as-supplied state)</p>	 <p>NSE0_01118</p>	Top and bottom parts of system are short-circuited and grounded	3-pole	Up to 1600 A	I	C	3WL9 111-0BD01-0AA0	1	1 unit	103	30.000	
				Up to 3200 A	II	C	3WL9 111-0BD03-0AA0	1	1 unit	103	40.500	
				Up to 6300 A	III	C	3WL9 111-0BD05-0AA0	1	1 unit	103	65.000	
				4-pole	Up to 1600 A	I	C	3WL9 111-0BD02-0AA0	1	1 unit	103	35.000
				Up to 3200 A	II	C	3WL9 111-0BD04-0AA0	1	1 unit	103	46.000	
				Up to 6300 A	III	C	3WL9 111-0BD06-0AA0	1	1 unit	103	70.000	

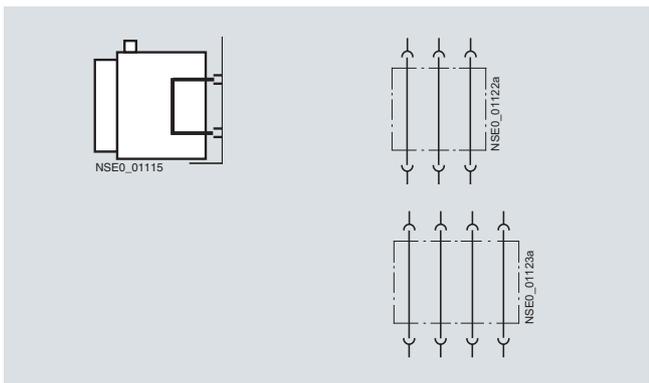
Conversion for the following applications is possible



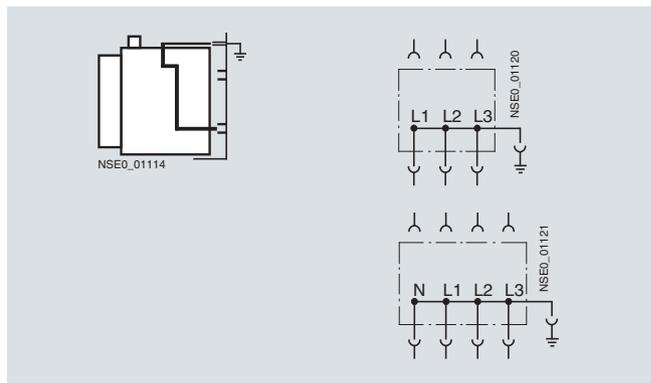
Top and bottom parts of system are short-circuited and grounded (as-supplied state)



Top part of system is short-circuited and grounded, infeed from bottom



Withdrawable bridging unit, infeed and outgoing terminals are permanently connected to each other



Bottom part of system is short-circuited and grounded, infeed from top

15

3WL Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC)

Accessories and spare parts

Options

Structure of the Order No.

Example			3WL1220-4NG31-1FA2
5th position:	Size	Size II	2
6th and 7th positions:	Max. rated circuit breaker current $I_{n\max}$	$I_{n\max} = 2000\text{ A}$	20
8th position:	Switching capacity class	High breaking capacity "H": 100 kA	4
9th position:	Electronic releases	ETU76B with pixel graphics display	N
10th position:	Electronic release supplement	... with ground-fault protection	G
11th position:	Number of poles	3-pole	3
12th position:	Installation type	Fixed mounting, main circuit connections on rear, vertical	1
13th position:	Operating mechanisms	Manual operating mechanism with mechanical closing	1
14th position:	1st auxiliary release	Shunt release AC 50/60 Hz 110 V	F
15th position:	2nd auxiliary release	Without 2nd auxiliary release	A
16th position:	Auxiliary switch	2 NO + 2 NC	2

An important prerequisite for computer-based order processing is that order numbers must be structured according to standardized criteria.

They are used as an unambiguous means of communication for various purposes:

- Offer processing
 - Selection and configuration
- Order processing
 - Ordering
 - Order confirmation
 - Handling warehouse products
 - Order processing at the supply bases
 - Delivery and shipment
- Reporting and planning
- Service and warranty

The standardized structure ensures that only one Order No. has to be administered for one device.

This saves time and effort during planning, configuring, ordering and stock keeping, and consequently above all it saves costs.

The example opposite explains the various positions within an Order No.

Accessories: with first order (components are already mounted)

Example		3WL1216-4JG31-1FA3-Z F02
"-Z" with order code	Communications interface "Standard" + Breaker Status Sensor (BSS) + communication module COM15 for connection to PROFIBUS DP	Z F02

Additional accessory components can be ordered ready-mounted.

These supplements are identified by "-Z".

Even with additional components, one Order No. is sufficient.

Accessories: for retrofitting (components for subsequent fitting)

Example		3WL9111-0BA21-0AA0
Protective cover for mechanical ON/OFF without lock		

Additional accessories which are not intended to be ready-mounted in the factory, such as spare parts for storage, can also be ordered separately from the circuit breaker.

Accessories for retrofitting are identified by the Order No. stem 3WL9.

Documentation

Operating manual Complete set	German/English	Order No.	3ZX18 12-0WL00-0AN1
	French/Italian	Order No.	3ZX18 12-0WL00-0AJ1
	Spanish/Portuguese	Order No.	3ZX18 12-0WL00-0AL1
Manual Communication	German	Order No.	A5E0151347-01
	English	Order No.	A5E0151353-01

Delivery time class C
On request
On request

Free download of documentation from
<http://www.siemens.com/lowvoltage/manuals>

More information

Up-to-date information on the Internet at:
<http://www.siemens.com/sentron>

3WL Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

3- and 4-pole, fixed-mounted versions

Selection and ordering data

For general data see page 15/6.

Size	Max. rated circuit breaker current $I_{n \max}$.	DT	3-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.	
			Order No. For Order No. supplements, see page 15/23	Price per PU				kg	
			A						
Horizontal main circuit connection									
II	1000	B	3WL12 10-8□□32-....		1	1 unit	103	56,000	
II	2000	B	3WL12 20-8□□32-....		1	1 unit	103	56,000	
II	4000 ¹⁾	B	3WL12 40-8□□32-....		1	1 unit	103	64,000	
Vertical main circuit connection									
II	1000	B	3WL12 10-8□□31-....		1	1 unit	103	56,000	
II	2000	B	3WL12 20-8□□31-....		1	1 unit	103	56,000	
II	4000 ¹⁾	B	3WL12 40-8□□31-....		1	1 unit	103	85,000	
Front main circuit connection, single hole									
II	1000	B	3WL12 10-8□□33-....		1	1 unit	103	56,000	
II	2000	B	3WL12 20-8□□33-....		1	1 unit	103	56,000	
Front main circuit connection, double hole									
II	1000	B	3WL12 10-8□□34-....		1	1 unit	103	56,000	
II	2000	B	3WL12 20-8□□34-....		1	1 unit	103	56,000	
Non-automatic air circuit breakers²⁾			Order No. supplements	Add. price					
Without electronic release			AA	Without					
Standard Order No. supplements (for further Order No. supplements, see page 15/23)									
Manual operating mechanism with mechanical closing			1AA2	Without					

Size	Max. rated circuit breaker current $I_{n \max}$.	DT	4-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
			Order No. For Order No. supplements, see page 15/23	Price per PU				kg
			A					
Horizontal main circuit connection								
II	1000	B	3WL12 10-8□□42-....		1	1 unit	103	67,000
II	2000	B	3WL12 20-8□□42-....		1	1 unit	103	67,000
II	4000 ¹⁾	B	3WL12 40-8□□42-....		1	1 unit	103	77,000
Vertical main circuit connection								
II	1000	B	3WL12 10-8□□41-....		1	1 unit	103	75,000
II	2000	B	3WL12 20-8□□41-....		1	1 unit	103	75,000
II	4000 ¹⁾	B	3WL12 40-8□□41-....		1	1 unit	103	103,000
Front main circuit connection, single hole								
II	1000	B	3WL12 10-8□□43-....		1	1 unit	103	67,000
II	2000	B	3WL12 20-8□□43-....		1	1 unit	103	67,000
Front main circuit connection, double hole								
II	1000	B	3WL12 10-8□□44-....		1	1 unit	103	67,000
II	2000	B	3WL12 20-8□□44-....		1	1 unit	103	67,000
Non-automatic air circuit breakers²⁾			Order No. supplements	Add. price				
Without electronic release			AA	Without				
Standard Order No. supplements (for further Order No. supplements, see page 15/23)								
Manual operating mechanism with mechanical closing			1AA2	Without				

Add "-Z" to the complete Order No. and indicate the appropriate order code(s).	Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price
		3WL1 2 . 0 - 8 -Z	
		□□□	3-pole 4-pole
Rated voltage 1000 V DC			
Size II	Up to 2000 A	A 0 5	
Size II	Up to 4000 A	A 0 5	

Note:

For voltages over 600 V use the version for 1000 V DC rated voltage: Order with "-Z" and order code "A05".

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air circuit breakers/non-automatic air circuit breakers up to 6300 A (AC)", "Options", page 15/24 onwards.

¹⁾ Provisions to dissipate heat must be made on the line side.

²⁾ For permissible rated short-time current I_{ctw} and rated short-circuit switching capacity I_{cc} for non-automatic air circuit breakers, see Technical Information LV 1T, "General Data", "Technical specifications".

An external overload and short-circuit protection device is available from the company "mat" for the SENTRON 3WL non-automatic air circuit breakers.

Available only directly from the company "mat" – Maschinen- und Anlagentechnik (for address see "Appendix, External Partners").

* You can order this quantity or a multiple thereof.

3WL Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

3-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	DT	3-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A			Order No. For Order No. supplements, see page 15/23	Price per PU				kg
Without guide frames (for guide frames, see page 15/53)								
II	1000	B	3WL12 10-8□□35-....		1	1 unit	103	60.000
II	2000	B	3WL12 20-8□□35-....		1	1 unit	103	60.000
II	4000 ¹⁾	B	3WL12 40-8□□35-....		1	1 unit	103	68.000
With guide frames, horizontal main circuit connection								
II	1000	B	3WL12 10-8□□36-....		1	1 unit	103	91.000
II	2000	B	3WL12 20-8□□36-....		1	1 unit	103	91.000
II	4000 ¹⁾	B	3WL12 40-8□□36-....		1	1 unit	103	113.000
With guide frames, vertical main circuit connection								
II	1000	B	3WL12 10-8□□37-....		1	1 unit	103	91.000
II	2000	B	3WL12 20-8□□37-....		1	1 unit	103	91.000
II	4000 ¹⁾	B	3WL12 40-8□□37-....		1	1 unit	103	121.000
With guide frames, connecting flanges								
II	1000	B	3WL12 10-8□□38-....		1	1 unit	103	91.000
II	2000	B	3WL12 20-8□□38-....		1	1 unit	103	91.000
II	4000 ¹⁾	B	3WL12 40-8□□38-....		1	1 unit	103	113.000

Non-automatic air circuit breakers²⁾

Without electronic release **AA** Add. price Without

Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)

Manual operating mechanism with mechanical closing **1AA2** Add. price Without

Add "-Z" to the complete Order No. and indicate the appropriate order code(s).	Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price 3-pole
Rated voltage 1000 V DC		3WL1 2 . 0 - 8 . . 3 -Z	
Size II ⁴⁾ Up to 2000 A		□□□	
Size II ⁴⁾ Up to 4000 A		A 0 5	
Tinned version of the customer's connections on the guide frame ³⁾ Only for circuit breakers in withdrawable version with horizontal connection or flange connection. The normal delivery time increases to 15 work days.		A 0 5	
Size II		A 0 8	

Note:

For voltages over 600 V use the version for 1000 V DC rated voltage; order with "-Z" and order code A05.

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air circuit breakers/non-automatic air circuit breakers up to 6300 A (AC)", "Options", page 15/24 onwards.

An external overload and short-circuit protection device is available from the company "mat" for the SENTRON 3WL non-automatic air circuit breakers.

Available only directly from the company "mat" – Maschinen- und Anlagentechnik (for address see "Appendix, External Partners").

- Provisions to dissipate heat must be made on the line side.
- For permissible rated short-time current I_{cw} and rated short-circuit switching capacity I_{cc} for non-automatic air circuit breakers, see Technical Information LV 1T, "General Data", "Technical specifications".
- The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
- If ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

3WL Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	DT	4-pole non-automatic air circuit breakers DC	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
			Order No. For Order No. supplements, see page 15/23	Price per PU			kg
Without guide frames (for guide frames, see page 15/53)							
II	1000	B	3WL12 10-8□□45-....		1	1 unit	103
II	2000	B	3WL12 20-8□□45-....		1	1 unit	103
II	4000 ¹⁾	B	3WL12 40-8□□45-....		1	1 unit	103
With guide frames, horizontal main circuit connection							
II	1000	B	3WL12 10-8□□46-....		1	1 unit	103
II	2000	B	3WL12 20-8□□46-....		1	1 unit	103
II	4000 ¹⁾	B	3WL12 40-8□□46-....		1	1 unit	103
With guide frames, vertical main circuit connection							
II	1000	B	3WL12 10-8□□47-....		1	1 unit	103
II	2000	B	3WL12 20-8□□47-....		1	1 unit	103
II	4000 ¹⁾	B	3WL12 40-8□□47-....		1	1 unit	103
With guide frames, connecting flanges							
II	1000	B	3WL12 10-8□□48-....		1	1 unit	103
II	2000	B	3WL12 20-8□□48-....		1	1 unit	103
II	4000 ¹⁾	B	3WL12 40-8□□48-....		1	1 unit	103
Non-automatic air circuit breakers²⁾			Order No. supplements	Add. price			
Without electronic release			AA	Without			
Standard Order No. supplements (for further Order No. supplements for circuit breakers and guide frames, see page 15/23)							
Manual operating mechanism with mechanical closing			1AA2	Without			
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).			Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Additional price		
Rated voltage 1000 V DC				3WL1 2 . 0 - 8 . . 4 -Z	4-pole		
Size II ⁴⁾ Up to 2000 A				□□□			
Size II ⁴⁾ Up to 4000 A				A 0 5			
Tinned version of the customer's connections on the guide frame ³⁾				A 0 5			
Only for circuit breakers in withdrawable version with horizontal connection or flange connection. The normal delivery time increases to 15 work days.				A 0 8			
Size II				A 0 8			

Note:

For voltages over 600 V use the version for 1000 V DC rated voltage; order with "-Z" and order code A05.

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air circuit breakers/non-automatic air circuit breakers up to 6300 A (AC)", "Options", page 15/24 onwards.

An external overload and short-circuit protection device is available from the company "mat" for the SENTRON 3WL non-automatic air circuit breakers.

Available only directly from the company "mat" – Maschinen- und Anlagentechnik (for address see "Appendix, External Partners").

- Provisions to dissipate heat must be made on the line side.
- For permissible rated short-time current I_{cw} and rated short-circuit switching capacity I_{cc} for non-automatic air circuit breakers, see Technical Information LV 1T, "General Data", "Technical specifications".
- The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
- If ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

3WL Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

Accessories and spare parts

Selection and ordering data

Guide frames for DC non-automatic air circuit breakers

Size	Max. rated circuit breaker current $I_{n\ max}$	DT	For 3-pole non-automatic air circuit breakers	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
A			Order No. (Order No. supplements required according to table below)					kg
Front main circuit connection, single hole								
II	2000	B	3WL9 212-3DA□□-□□A1		1	1 unit	103	31,000
Front main circuit connection, double hole								
II	2000	B	3WL9 212-3DB□□-□□A1		1	1 unit	103	31,000
Horizontal main circuit connection								
II	2000	B	3WL9 212-3DC□□-□□A1		1	1 unit	103	31,000
II	4000	B	3WL9 212-6DC□□-□□A1		1	1 unit	103	60,000
Vertical main circuit connection								
II	2000	B	3WL9 212-3DD□□-□□A1		1	1 unit	103	31,000
II	4000	B	3WL9 212-6DD□□-□□A1		1	1 unit	103	60,000
Main circuit connection connecting flanges								
II	2000	B	3WL9 212-3DE□□-□□A1		1	1 unit	103	31,000
II	4000	B	3WL9 212-6DE□□-□□A1		1	1 unit	103	60,000

Number of auxiliary supply connectors

- Without
- 1 connector
- 2 connectors
- 3 connectors
- 4 connectors

For required number of auxiliary supply connectors, see table on page 15/29

Type of auxiliary circuit connections

- Without
- With screw connections (SIGUT)
- With screwless connection method (tension spring)

Position indicator switches

- Without
- Option 1 Connected 1 CO contact, test 1 CO contact, disconnected 1 CO contact
- Option 2 Connected 3 CO contacts, test 2 CO contacts, disconnected 1 CO contact

Shutters

- Without
- With shutter, 2 parts, lockable

Order No. supplements	Add. price
0 1 2 3 4	3-pole Without
0 1 2	Without
0 1	Without
2	
A B	Without
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).	Order No. with "-Z" and additional order code
Rated voltage 1000 V DC	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 3WL9 2 1 2 - A1 -Z □□□
Size II	A 0 5
Tinned version of the customer's connections on the guide frame ¹⁾	
Only for guide frames with horizontal connection or flange connection	
Size II	A 0 8

Guide frames for 4-pole DC non-automatic air circuit breakers

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air circuit breakers/Non-Automatic Air circuit breakers up to 6300 A (AC)", "Options", page 15/24 onwards.

¹⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

3WL Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

Accessories and Spare Parts

Size	Max. rated circuit breaker current $I_{n\max}$	DT	For 4-pole non-automatic air circuit breakers	Order No. (Order No. supplements required according to table below)	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx.
kg									
Front main circuit connection, single hole									
II	2000	B		3WL9 212-3EA□□-□□A1		1	1 unit	103	37,000
Front main circuit connection, double hole									
II	2000	B		3WL9 212-3EB□□-□□A1		1	1 unit	103	37,000
Horizontal main circuit connection									
II	2000	B		3WL9 212-3EC□□-□□A1		1	1 unit	103	37,000
II	4000	B		3WL9 212-6EC□□-□□A1		1	1 unit	103	84,000
Vertical main circuit connection									
II	2000	B		3WL9 212-3ED□□-□□A1		1	1 unit	103	37,000
II	4000	B		3WL9 212-6ED□□-□□A1		1	1 unit	103	84,000
Main circuit connection connecting flanges									
II	2000	B		3WL9 212-3EE□□-□□A1		1	1 unit	103	37,000
II	4000	B		3WL9 212-6EE□□-□□A1		1	1 unit	103	84,000
				Order No. supplements	Add. price				
Number of auxiliary supply connectors									
Without				0	4-pole				
1 connector				1	Without				
2 connectors				2					
3 connectors				3					
4 connectors				4					
For required number of auxiliary supply connectors, see table on page 15/29									
Type of auxiliary circuit connections									
Without				0	Without				
With screw connections (SIGUT)				1					
With screwless connection method (tension spring)				2					
Position indicator switches									
Without				0	Without				
Option 1				1					
Connected 1 CO contact, test 1 CO contact, disconnected 1 CO contact									
Option 2				2					
Connected 3 CO contacts, test 2 CO contacts, disconnected 1 CO contact									
Shutters									
Without				A	Without				
With shutter, 2 parts, lockable				B					
Add "-Z" to the complete Order No. and indicate the appropriate order code(s).			Order No. with "-Z" and additional order code	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	Add. price				
Rated voltage 1000 V DC				3WL9 2 1 2 - A1 -Z					
Size II				□□□					
Tinned version of the customer's connections on the guide frame ¹⁾				A 0 5					
Only for guide frames with horizontal connection or flange connection									
Size II				A 0 8					

For guide frames for 3-pole DC non-automatic air circuit breakers see previous page

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air circuit breakers/Non-Automatic Air circuit breakers up to 6300 A (AC)", "Options", page 15/24 onwards.

1) The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.